

Titan SF Down light

IP44



130
LM/W



CRI
>92

5 YEAR
WARRANTY




Titan SF Down Light



Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and Philips, Cree , Bridgelux.etc.
- Lumen efficacy 95 to 130lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming

Classification

Class II


220 to 240VAC 50Hz

Led Driver: Philip's, Tridonic, Lifud


CCT

3000K,4000K,6500K


Luminous Intensity Distribution Curve

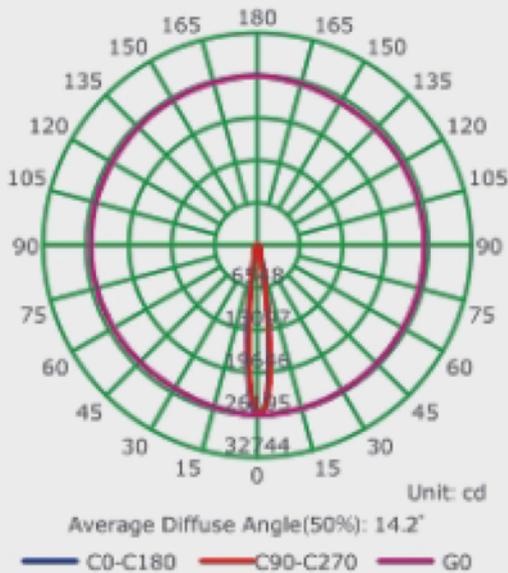

Illuminance at a Distance

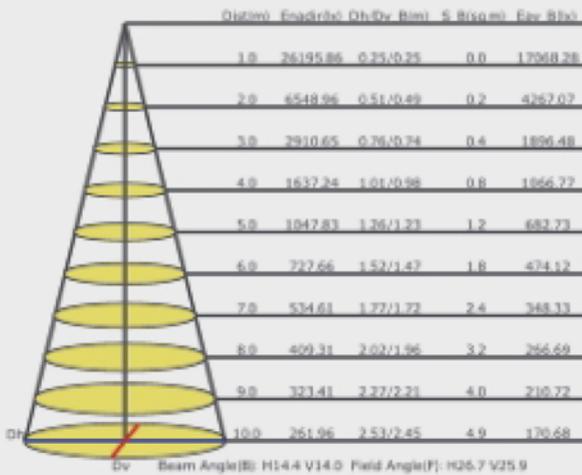

Dimension

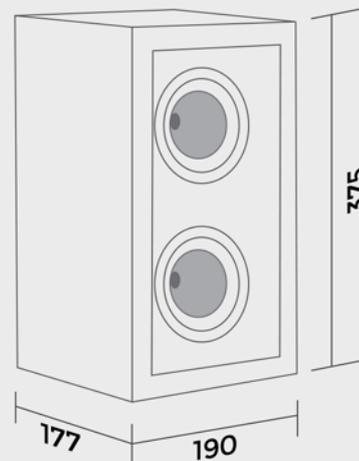

MODEL	Power	CCT	Luminous Efficiency	Beam Angle	RF No	Size
CLX-05TSF 120 010W	10W	3000K-6500K	80lm/w	15° 24° 36°	4258	120x120xH125mm
CLX-05TSF 150 020W	20W	3000K-6500K	80lm/w	15° 24° 36°	4259	220x120xH125mm
CLX-05TSF 190 040W	40W	3000K-6500K	80lm/w	15° 24° 60°	4260	150x150xH142mm
CLX-05TSF 190 050W	50W	3000K-6500K	80lm/w	15° 24° 60°	4261	280x150xH142mm
CLX-05TSF 2202X10W	2X10W	3000K-6500K	100lm/w	24° 60°	4262	190x190xH177mm
CLX-05TSF 2802X20W	2x20W	3000K-6500K	100lm/w	24° 60°	4263	375x190xH177mm
CLX-05TSF37502X40W	2x40W	3000K-6500K	100lm/w	24° 60°	4264	375x190xH177mm
CLX-05TSF37502X50W	2x50W	3000K-6500K	100lm/w	24° 60°	4265	375x190xH177mm

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com



Titan SF - Down Light

www.cliulux.com