

# Titan SQ Down light



# Titan SQ

## Down Light



## Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and Philips, Cree , Citizen.etc.
- Lumen efficacy 95 to 130lm/w, CRI >80
- Low energy consumption and up to>70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming

## Classification

Class II


220 to 240VAC 50Hz

Led Driver: Philip's, Tridonic, Lifud


CCT

3000K,4000K,6500K


## Luminous Intensity Distribution Curve

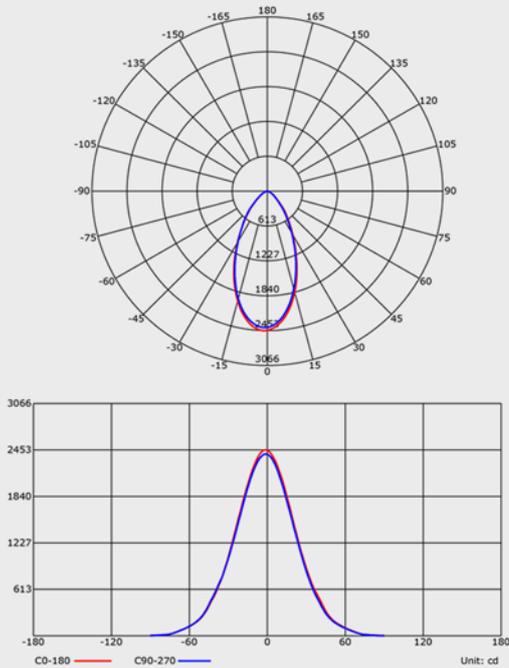

## Illuminance at a Distance

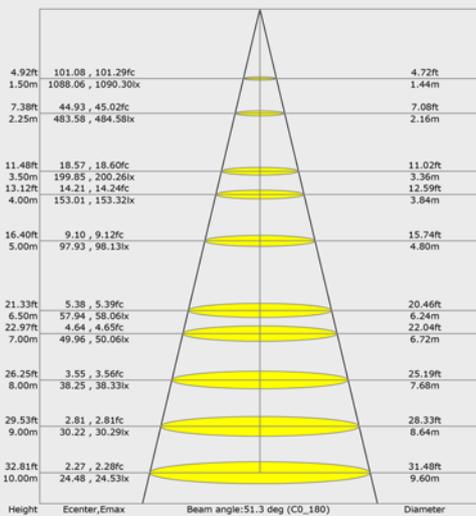

## Dimension

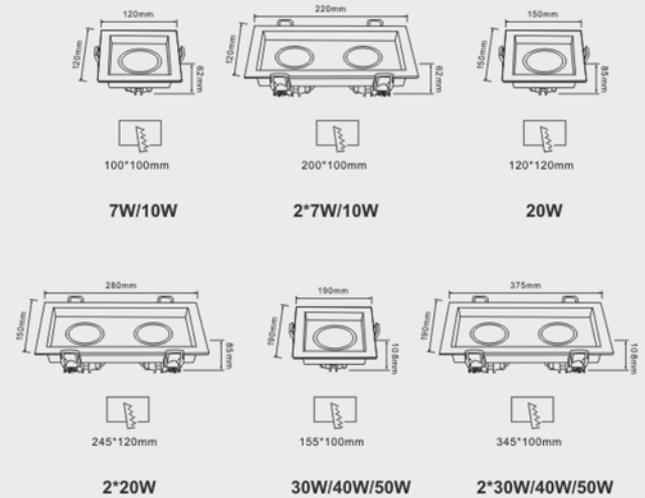

MODEL	Power	CCT	Luminous Efficiency	Beam Angle	Size	RF No	Cut-out
CLX-05TSQ 120 010W	10W	3000K-6500K	80lm/w	15° 24° 36°	120x120xH62mm	4266	100x100mm
CLX-05TSQ 150 020W	20W	3000K-6500K	80lm/w	15° 24° 36°	220x120xH62mm	4267	200x100mm
CLX-05TSQ 190 040W	40W	3000K-6500K	80lm/w	15° 24° 36°	150x150xH85mm	4268	120x120mm
CLX-05TSQ 190 050W	50W	3000K-6500K	80lm/w	15° 24° 36°	280x150xH85mm	4269	245x120mm
CLX-05TSQ22202X10W	2x10W	3000K-6500K	100lm/w	24° 60°	190x190xH108mm	4270	155x100mm
CLX-05TSQ2802X20W	2x20W	3000K-6500K	100lm/w	24° 60°	375x190xH108mm	4271	345x100mm
CLX-05TSQ37502X40W	2x40W	3000K-6500K	100lm/w	24° 60°	375x190xH108mm	4272	345x100mm
CLX-05TSQ37502X50W	2x50W	3000K-6500K	100lm/w	24° 60°	375x190xH108mm	4273	345x100mm

# cliulux

illuminate your dreams

UK 

City Road, London  
ECV 2NX, United Kingdom  
[www.cliulux.com](http://www.cliulux.com)



## Titan SQ – Down Light