

Titan UP Down light



Titan UP Down Light



Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and Philips, Cree , Citizen.etc.
- Lumen efficacy 95 to 130lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming

Classification

Class II


220 to 240VAC 50Hz

Led Driver: Philip's, Tridonic, Lifud


CCT

3000K,4000K,6500K


Luminous Intensity Distribution Curve

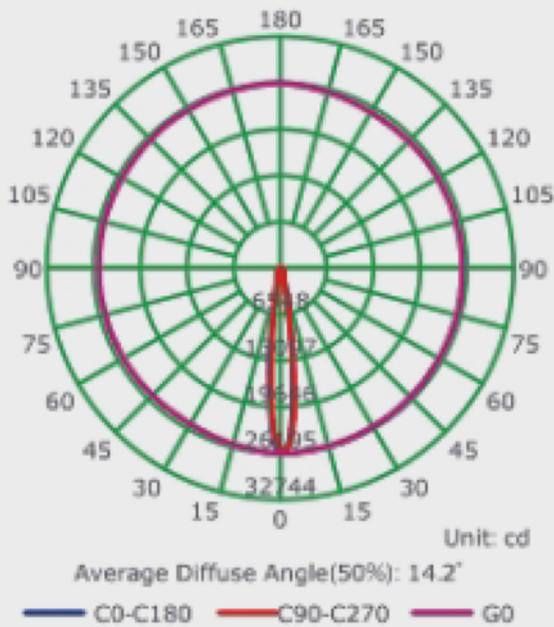

Illuminance at a Distance

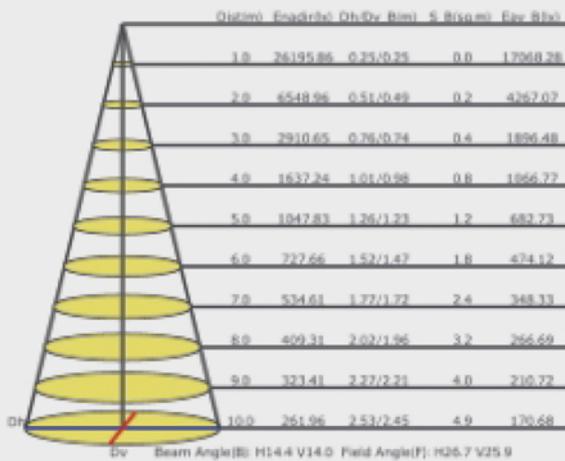

Dimension

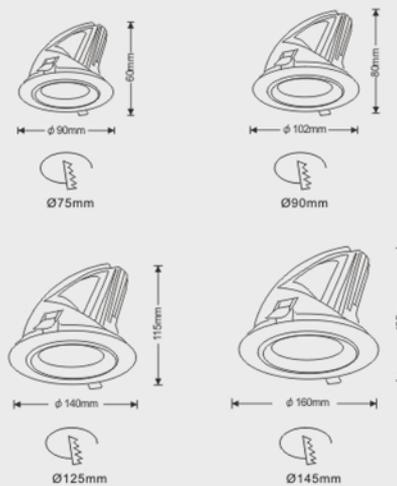

| MODEL | Power | CCT | Luminous Efficiency | Beam Angle | Size | RF No | Cut-out |
|--------------------|-------|-------------|---------------------|-------------|---------------|-------|---------|
| CLX-05TUP 075 010W | 10W | 3000K-6500K | 80lm/w | 15° 24° 36° | Ø90 x H60mm | 4253 | Ø75mm |
| CLX-05TUP 090 015W | 20W | 3000K-6500K | 80lm/w | 15° 24° 36° | Ø102 x H80mm | 4254 | Ø90mm |
| CLX-05TUP 125 030W | 30W | 3000K-6500K | 100lm/w | 15° 24° 36° | Ø140 x H115mm | 4255 | Ø125mm |
| CLX-05TUP 145 040W | 40W | 3000K-6500K | 100lm/w | 15° 24° 36° | Ø160 x H135mm | 4256 | Ø145mm |
| CLX-05TUP 145 050W | 50W | 3000K-6500K | 100lm/w | 15° 24° 36° | Ø160 x H135mm | 4257 | Ø145mm |

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Titan UP - Down Light