

Titan ZX Down light



Titan ZX Down Light



Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and Philips, Cree , Citizen.etc.
- Lumen efficacy 95 to 130lm/w, CRI >80 - CRI >90
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming

Classification

Class II


220 to 240VAC 50Hz

Led Driver: Philip's, Tridonic, Lifud


CCT

3000K,4000K,6500K


Luminous Intensity Distribution Curve

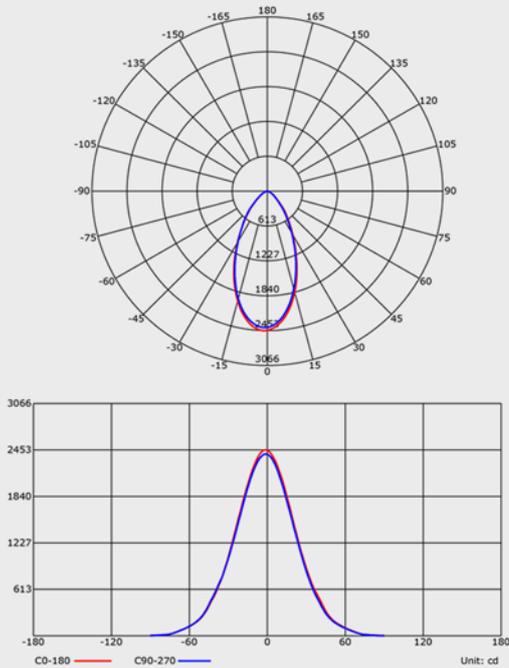


Illuminance at a Distance

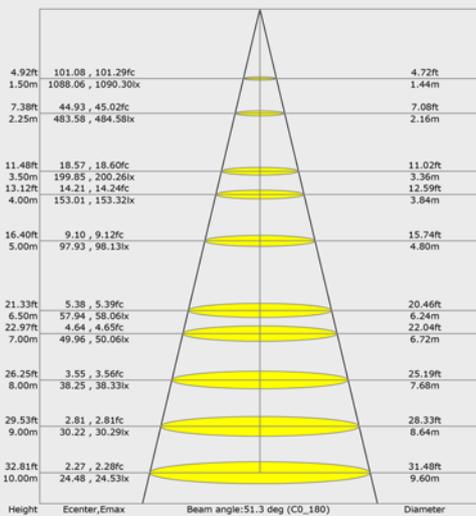

Dimension

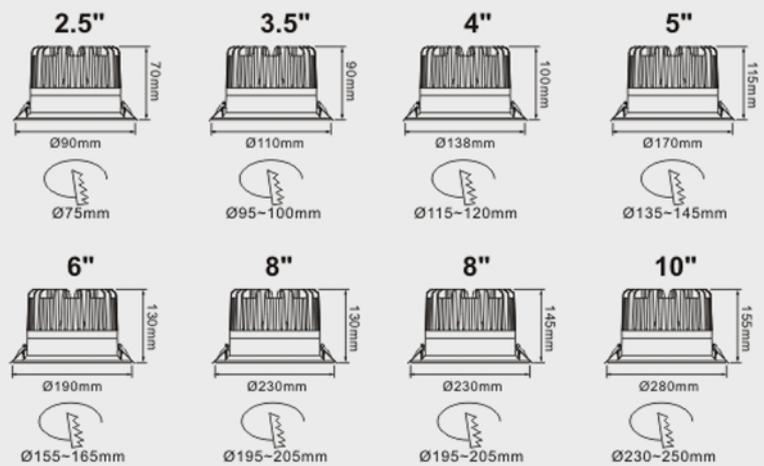

MODEL	Power	CCT	Luminous Efficiency	Beam Angle	Size	RF No	Cut-out
CLX-05TZX 090 010W	10W	3000K-6500K	95 - 130lm/w	15° 24° 60°	Ø90 x H70mm	4245	Ø75mm
CLX-05TZX 110 020W	20W	3000K-6500K	95 - 130lm/w	24° 36° 60°	Ø110 x H90mm	4246	Ø95~100mm
CLX-05TZX 138 030W	30W	3000K-6500K	95 - 130lm/w	24° 36° 60°	Ø138 x H100mm	4247	Ø115~120mm
CLX-05TZX 170 040W	40W	3000K-6500K	95 - 130lm/w	24° 60°	Ø170 x H115mm	4248	Ø135~145mm
CLX-05TZX 170 050W	50W	3000K-6500K	95 - 130lm/w	24° 60°	Ø190 x H130mm	4249	Ø155~165mm
CLX-05TZX 230 060W	60W	3000K-6500K	95 - 130lm/w	24° 60°	Ø230 x H130mm	4250	Ø195~205mm
CLX-05TZX 280 080W	80W	3000K-6500K	95 - 130lm/w	24° 60°	Ø230 x H145mm	4251	Ø195~205mm
CLX-05TZX 280 100W	100W	3000K-6500K	95 - 130lm/w	24° 60°	Ø280 x H155mm	4252	Ø230~250mm

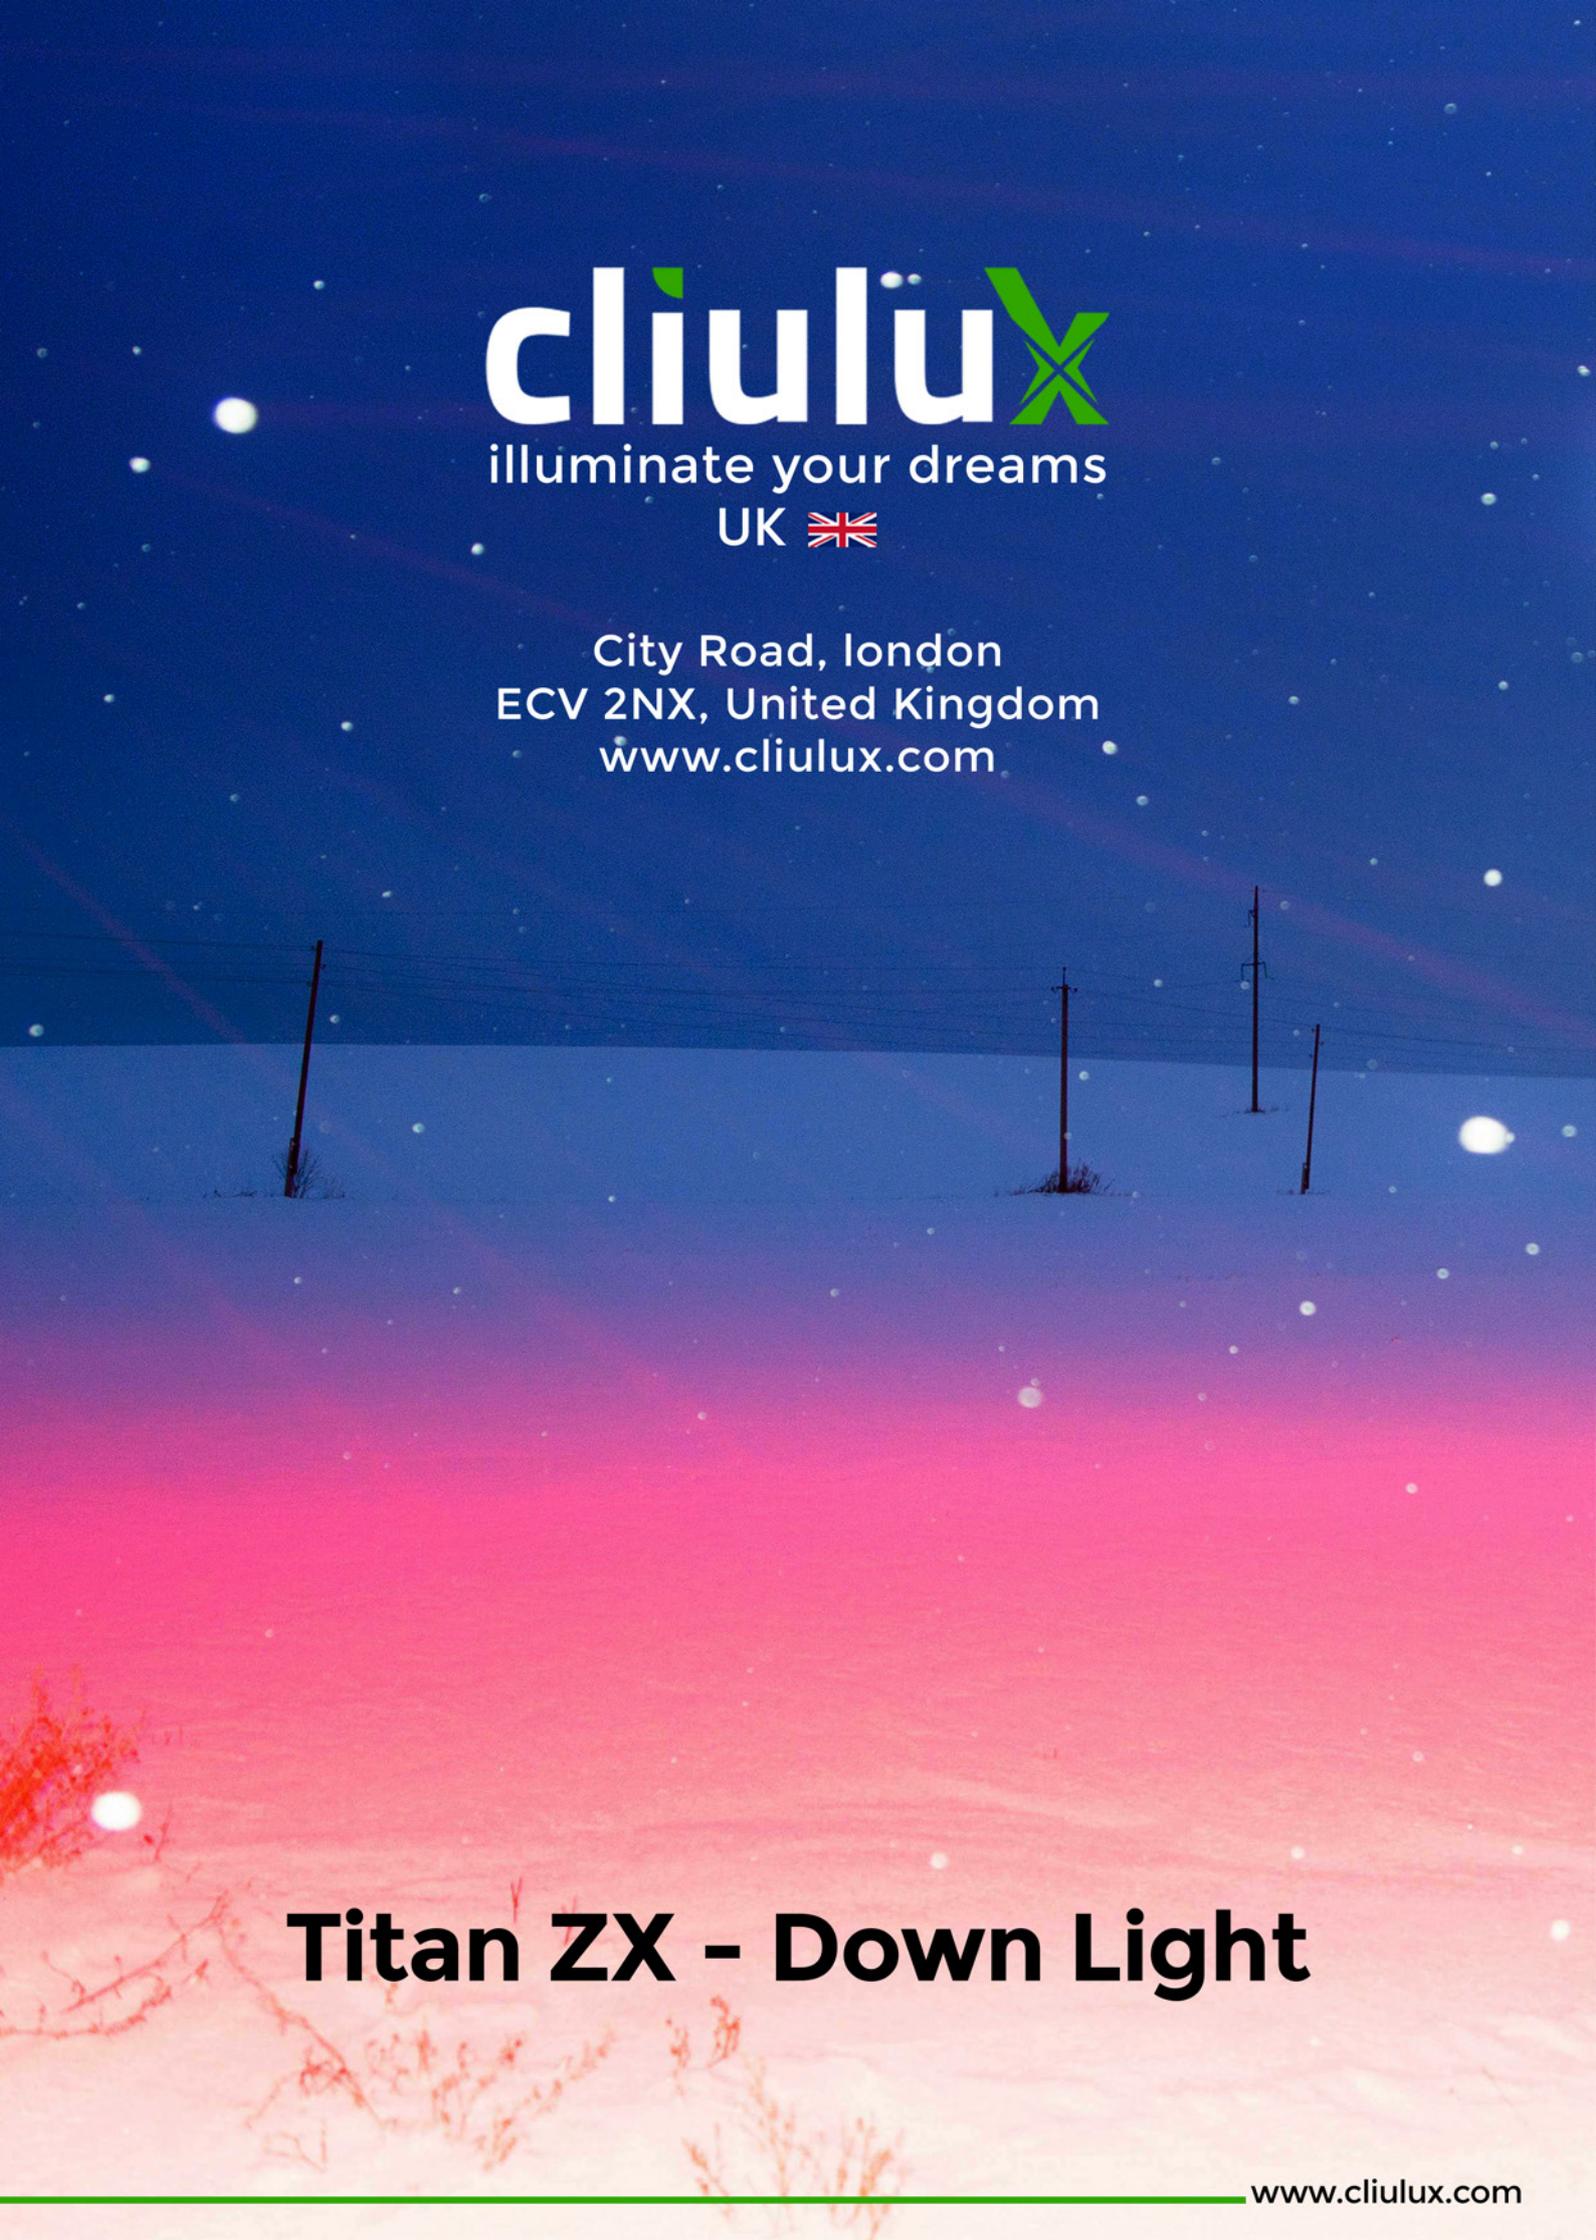

cliulux

illuminate your dreams

UK 

City Road, london
ECV 2NX, United Kingdom
www.cliulux.com

Titan ZX - Down Light