

Aveo Ground Lights



Aveo AD



AO14GAD

LED




Product features

- Perfect structure designed die-cast aluminium and SS 304 L Temperd Safety Glass
- High Performance reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving


Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud & Menwell

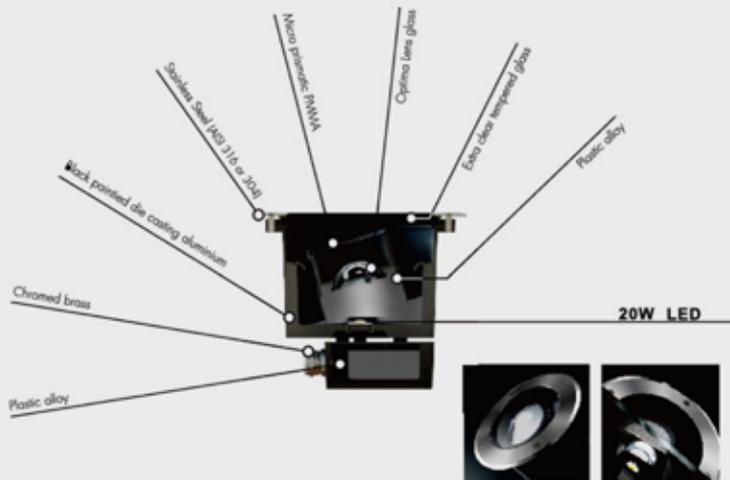


Aveo is an in ground outdoor LED lighting device with a lens mounted in a adjustable structure. This is an innovative system can project a beam of light adjustable in wide and direction. This capability provides to this light fixture a great range of useful solutions in out door projects.

This new and innovative system can resolve lighting troubles with no solution before

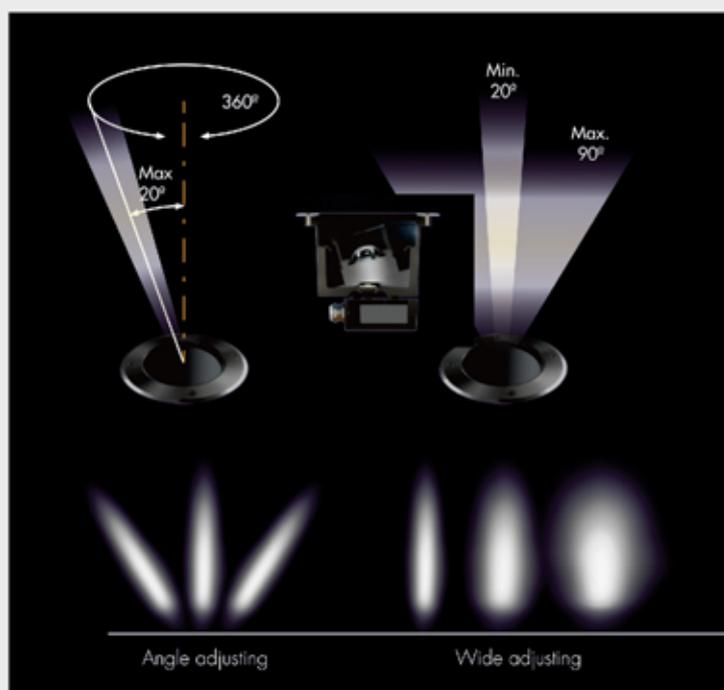

Dimension

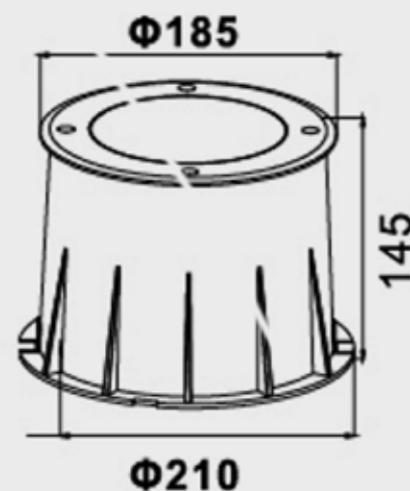

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 185AO14GAD20	20W	2700 - 6000K	AC110-240V	1600	D185 x 210 x H145

Aveo Ground Light 1



 LED



Product features


- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud & Menwell



Dimension

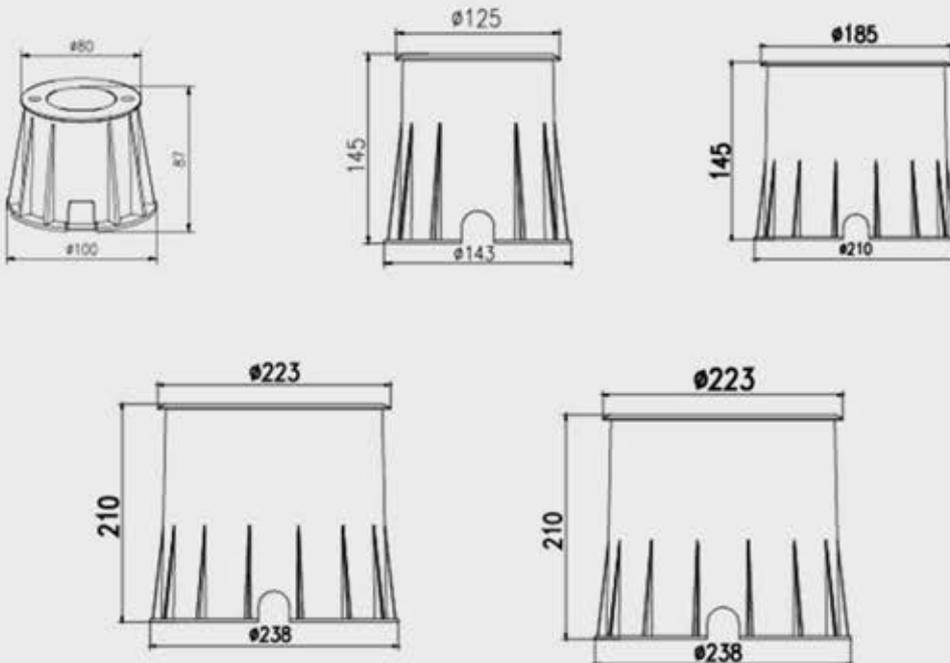

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 80AO87G105	5W	3000 - 6000K	AC110-240V	350	D80 x 100 x H87
CLX-12SN 125AO14G110	10W	3000 - 6000K	AC110-240V	800	D125 x 143 x H145
CLX-12SN 185AO14G120	20W	3000 - 6000K	AC110-240V	1650	D185 x 210 x H145
CLX-12SN 223AO21G130	30W	3000 - 6000K	AC110-240V	2300	D223 x 238 x H210

Aveo Ground Light 2



 LED



Product features





- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
DC12V - 24V	
50Hz / PF:>0.9	



Dimension



MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 022AO24G2.5	.0.5W	3000 - 6000K	DC12V - 24V	50	D22 x 16 x H24
CLX-12SN 035AO65G21	1W	3000 - 6000K	DC12V - 24V	90	D35 x 35 x H65
CLX-12SN 052AO73G22	2W	3000 - 6000K	DC12V - 24V	160	D52 x 52 x H73
CLX-12SN 075AO85G24.5	4.5W	3000 - 6000K	AC110V - 240V	330	D75 x 79 x H85

Aveo

Ground Light 3



 LED



Product features




- Perfect structure designed die-cast aluminium
- High Performance PC optical lense different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud & Menwell



Dimension

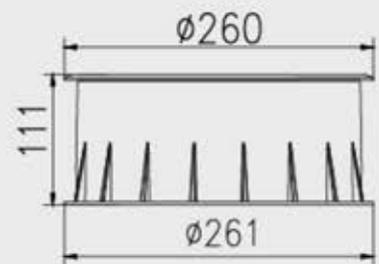

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 248AO111G318	18W	3000 - 6000K	AC110-240V	1440	D248 x 261 x H111
CLX-12SN 248AO111G324	24W	3000 - 6000K	AC110-240V	1920	D248 x 261 x H111
CLX-12SN 260AO111G336	36W	3000 - 6000K	AC110-240V	2900	D260 x 261 x H111

Aveo Ground Light 4



 LED



Product features


- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud & Menwell



Dimension

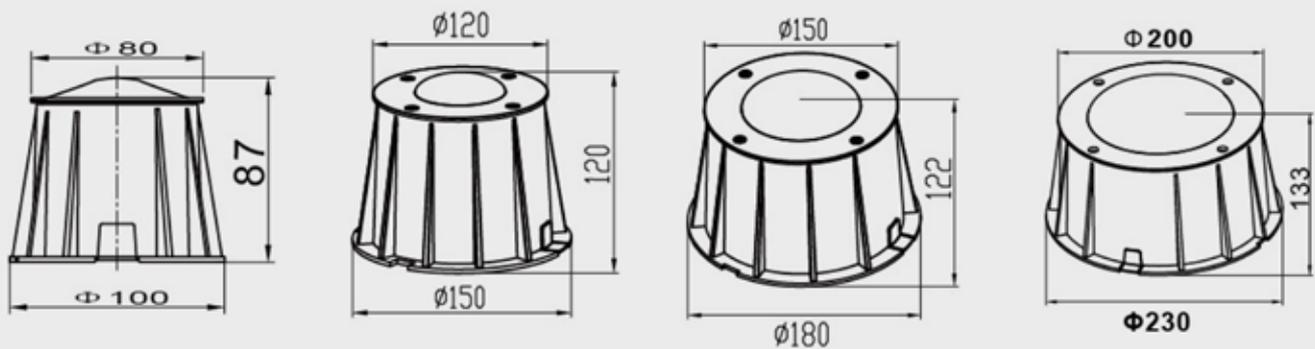

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 80AO100G43	3W	3000 - 6000K	AC110-240V	240	D80 x 100 x H87
CLX-12SN 120AO120G46	6W	3000 - 6000K	AC110-240V	450	D120 x 150 x H120
CLX-12SN 150AO122G49	9W	3000 - 6000K	AC110-240V	720	D150 x 180 x H122
CLX-12SN 200AO133G412	12W	3000 - 6000K	AC110-240V	960	D200 x 230 x H133

cliulux

illuminate your dreams

UK 

City Road, london
ECV 2NX, United Kingdom
www.cliulux.com



Aveo
Ground Light