

Aveo Wall Recessed Lights



Aveo

Wall Recessed Light 1



 LED





Product features

- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class II	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	

Dimension (all dimensions are in mm)

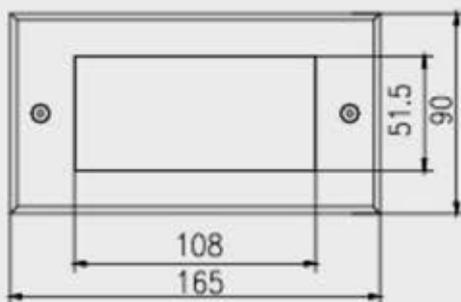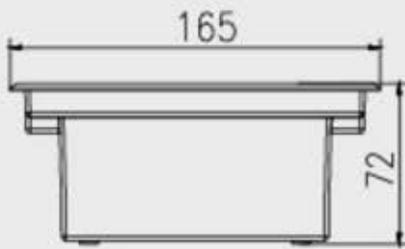

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 165AO90WR19	9W	2700 - 6000K	AC110-240V	760	W165 x 90 x H72
CLX-12SN 208AO12WR118	18W	2700 - 6000K	AC110-240V	1440	W208 x 80 x H120

Aveo

Wall Recessed Light 2



272AO14WR212



320AO10WR210

 LED




Product features

- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class II	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	

Dimension (all dimensions are in mm)

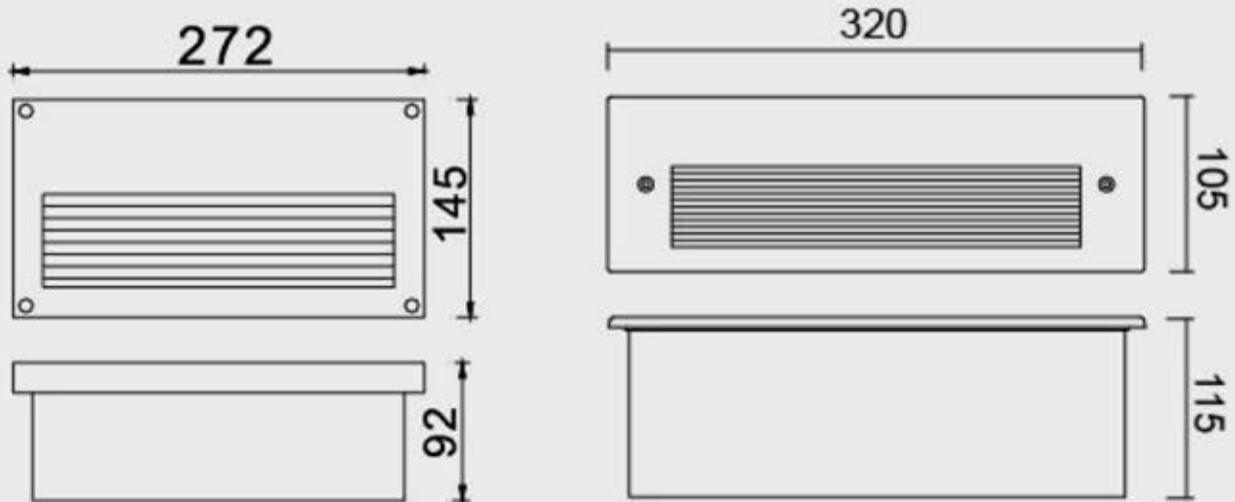

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 272AO14WR212	12W	2700 - 6000K	AC110-240V	960	W272 x 92 x H105
CLX- 12SN 320AO10WR210	10W	2700 - 6000K	AC110-240V	800	W320 x 115 x H140

Aveo

Wall Recessed Light



135AO50WR33



210AO60WR44



160AO160WR57



60AO210WR62

 LED



Product features

- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving


Classification

Class II	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	


Dimension (all dimensions are in mm)




90AO50WR33




135AO50WR33




105AO60WR42




210AO60WR44




90AO90WR52




160AO160WR57




60AO105WR62



60AO210WR62



MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 90AO50WR33	3W	2700 - 6000K	AC110-240V	240	W90 x 65 x H50
CLX-12SN 135AO50WR33	3W	2700 - 6000K	AC110-240V	240	W135 x 65 x H50
CLX-12SN 105AO60WR42	2W	2700 - 6000K	AC110-240V	160	W105 x 55 x H60
CLX-12SN 210AO60WR44	4W	2700 - 6000K	AC110-240V	320	W210 x 55 x H60
CLX-12SN 90AO90WR52	2W	2700 - 6000K	AC110-240V	160	W90 x 55 x H90
CLX-12SN 160AO160WR57	7W	2700 - 6000K	AC110-240V	550	W160 x 63 x H160
CLX-12SN 60AO105WR62	2W	2700 - 6000K	AC110-240V	160	W60 x 55 x H105
CLX-12SN 60AO210WR62	2W	2700 - 6000K	AC110-240V	160	W60 x 55 x H210

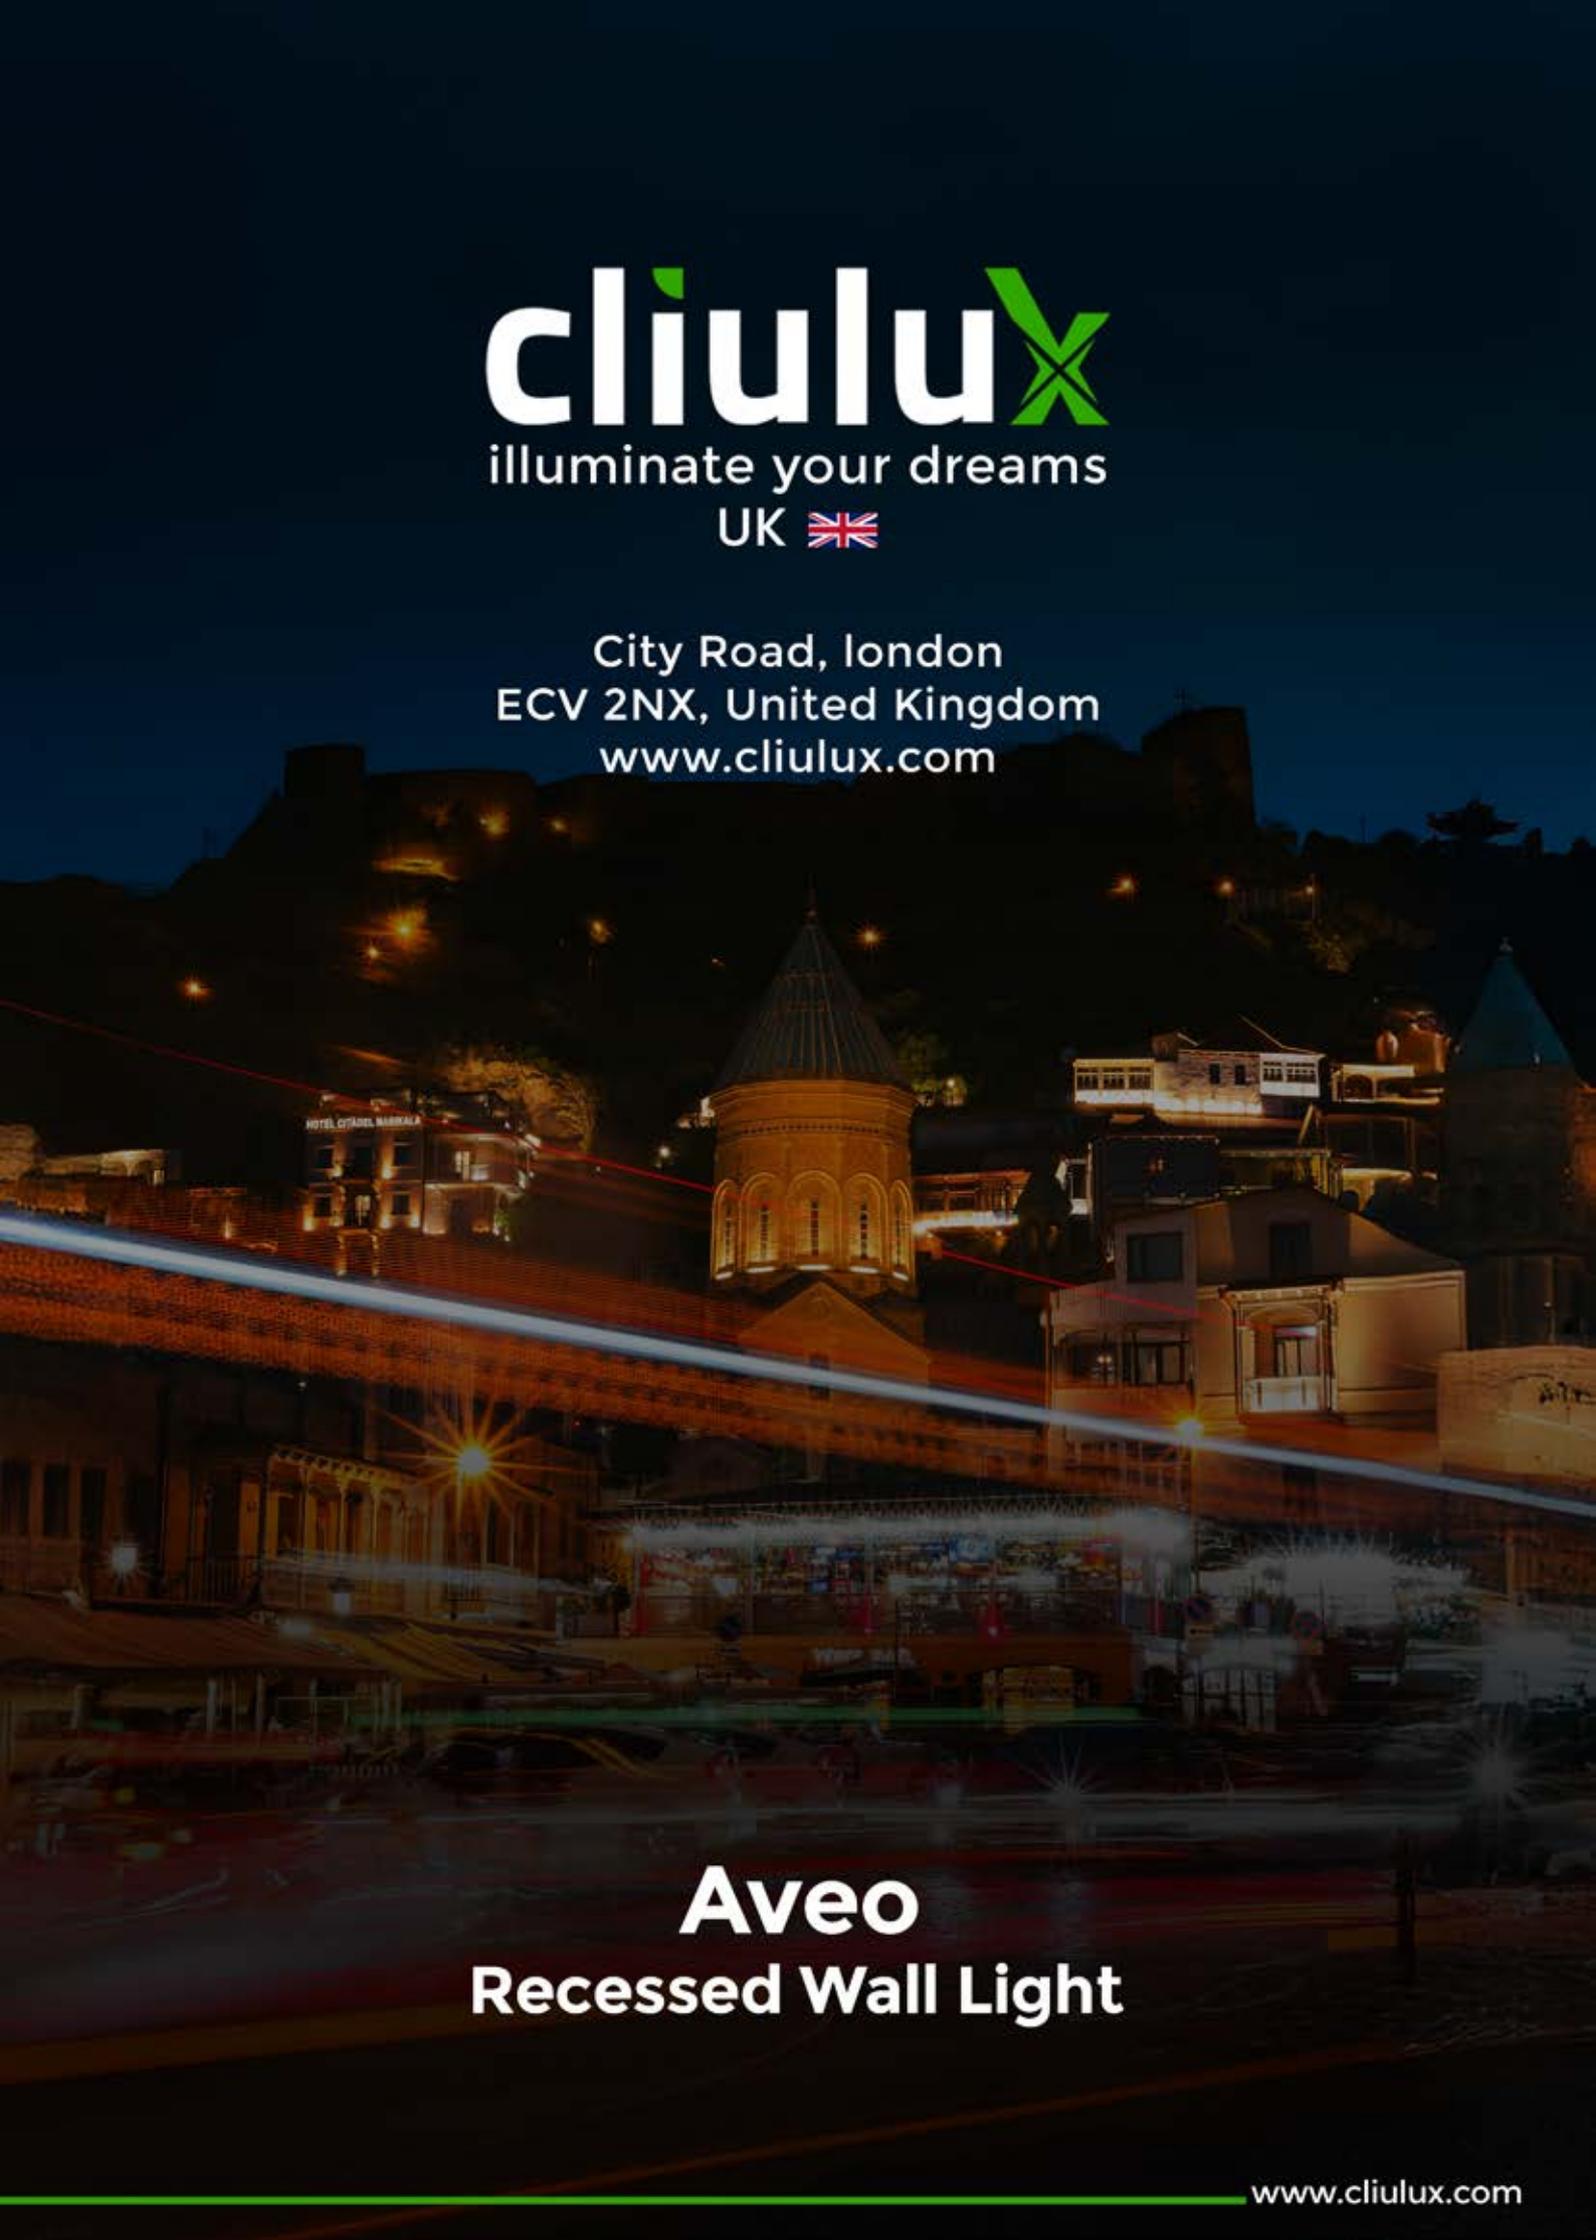

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Aveo
Recessed Wall Light

www.cliulux.com