

Aveo Wall Lights



Aveo Wall Light 1



 LED







Product features

- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	

Dimension (all dimensions are in mm)

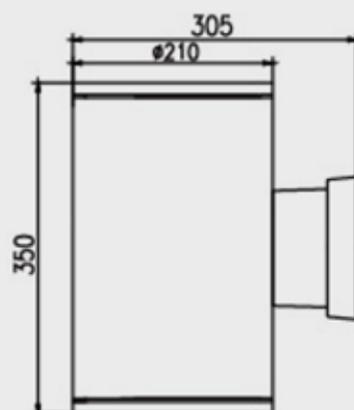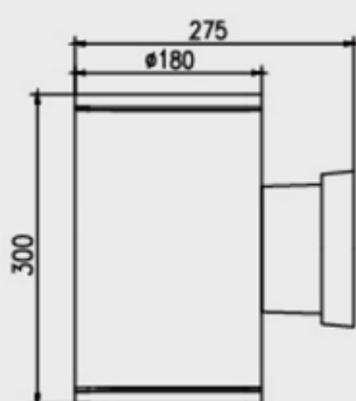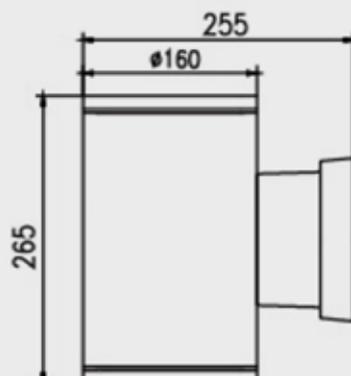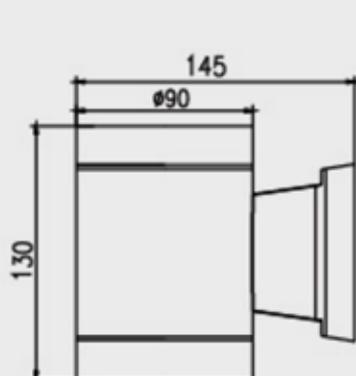

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 60AO10W12X3	6W	2700 - 6000K	AC110-240V	450	D60 x 105 x H100
CLX-12SN 90AO13W12X8	16W	2700 - 6000K	AC110-240V	1280	D90 x 145 x H130
CLX-12SN 160AO26W12X15	30W	2700 - 6000K	AC110-240V	2400	D160 x 255 x H265
CLX-12SN 180AO30W12X20	40W	2700 - 6000K	AC110-240V	3200	D180 x 275 x H300
CLX-12SN 210AO35W12X30	60W	2700 - 6000K	AC110-240V	4800	D210 x 305 x H350

Aveo Wall Light 2



 LED







Product features

- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class I	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	

Dimension (all dimensions are in mm)

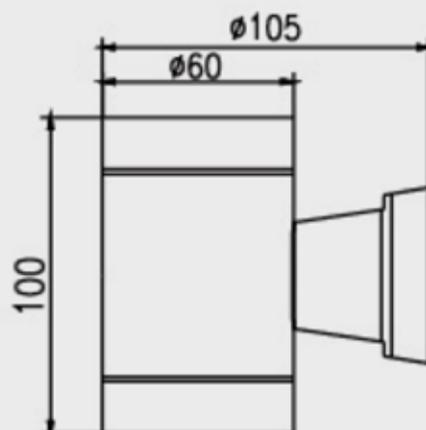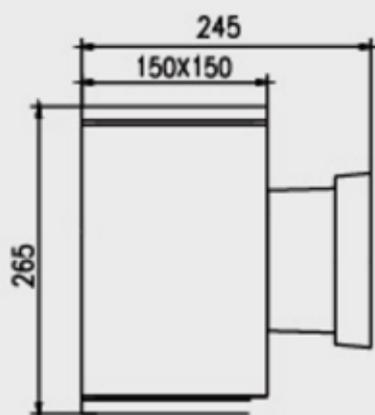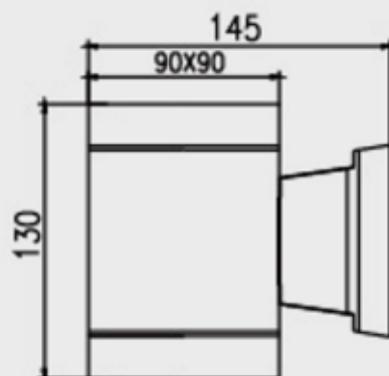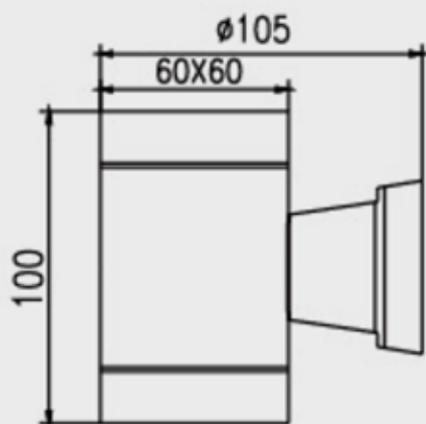

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 60AO10W2 2X3	6W	2700 - 6000K	AC110-240V	450	D60X60 x 105 x H100
CLX-12SN 90AO13W2 2X8	16W	2700 - 6000K	AC110-240V	1280	D90X90 x 145 x H130
CLX-12SN 150AO26W2 2X15	30W	2700 - 6000K	AC110-240V	2400	D150X150 x 245 x H265

Aveo Wall Light 3



 LED



Product features


- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class II CCT
110 to 240VAC 3000K,4000K,6500K
50Hz / PF:>0.9

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 68AO15W32X5	2x5W	2700 - 6000K	AC110-240V	800	D68 x 95 x H150

Aveo Wall Light 4

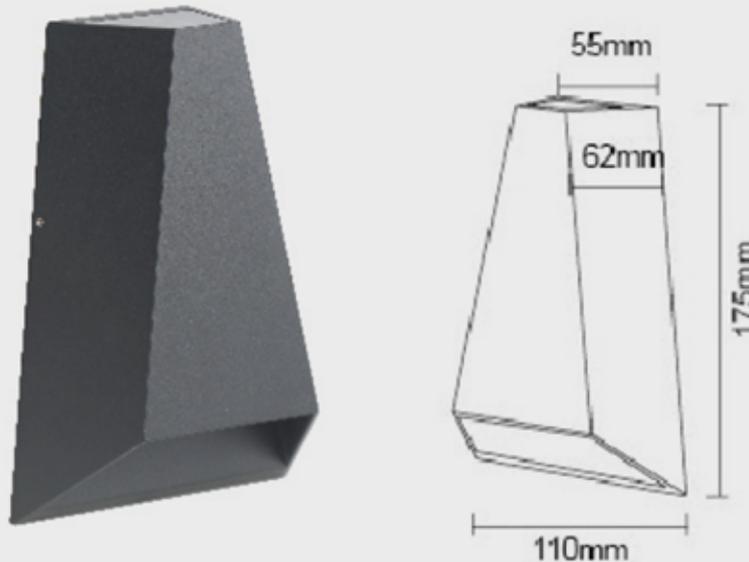

 LED



Product features


- Perfect structure designed die-cast aluminium and SS with Glass diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class II CCT
110 to 240VAC 3000K,4000K,6500K
50Hz / PF:>0.9

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 55A010W42X3	2x3W	2700 - 6000K	AC110-240V	450	D55 x 110 x H175

Aveo Wall Light 5

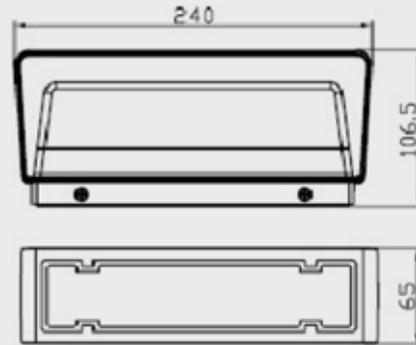

 LED



Product features

- Perfect structure designed die-cast aluminium and PC diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

Classification

Class II CCT
110 to 240VAC 3000K,4000K,6500K
50Hz / PF:>0.9

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12SN 65AO24W52X3	12W	2700 - 6000K	AC110-240V	960	W240 x 106 x H65

Aveo Wall Light 6



 LED




Product features

- Perfect structure designed die-cast aluminium and SS with PC diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree.
- Lumen efficacy 80 to 95lm/w, CRI >80
- Low energy consumption and up to >70% energy saving


Classification

Class II	CCT
110 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	

Dimension (all dimensions are in mm)

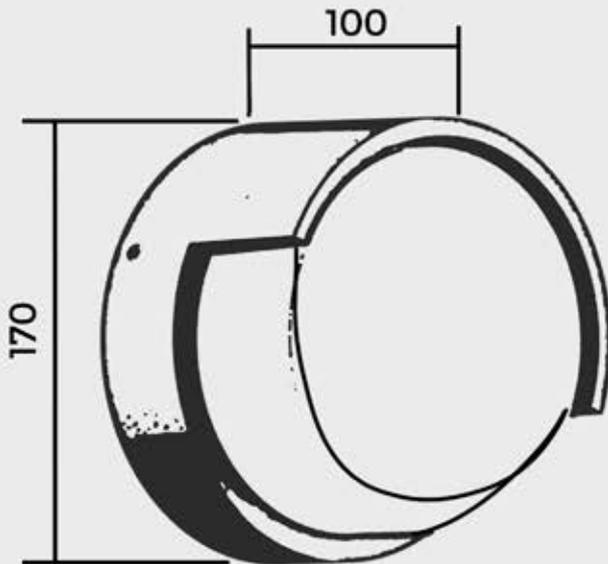

MODEL	Wattage	CCT	Voltage	Lumens	Size
CLX-12AO170WL618	18W	2700 - 6000K	AC110-240V	1600	W170 x H100

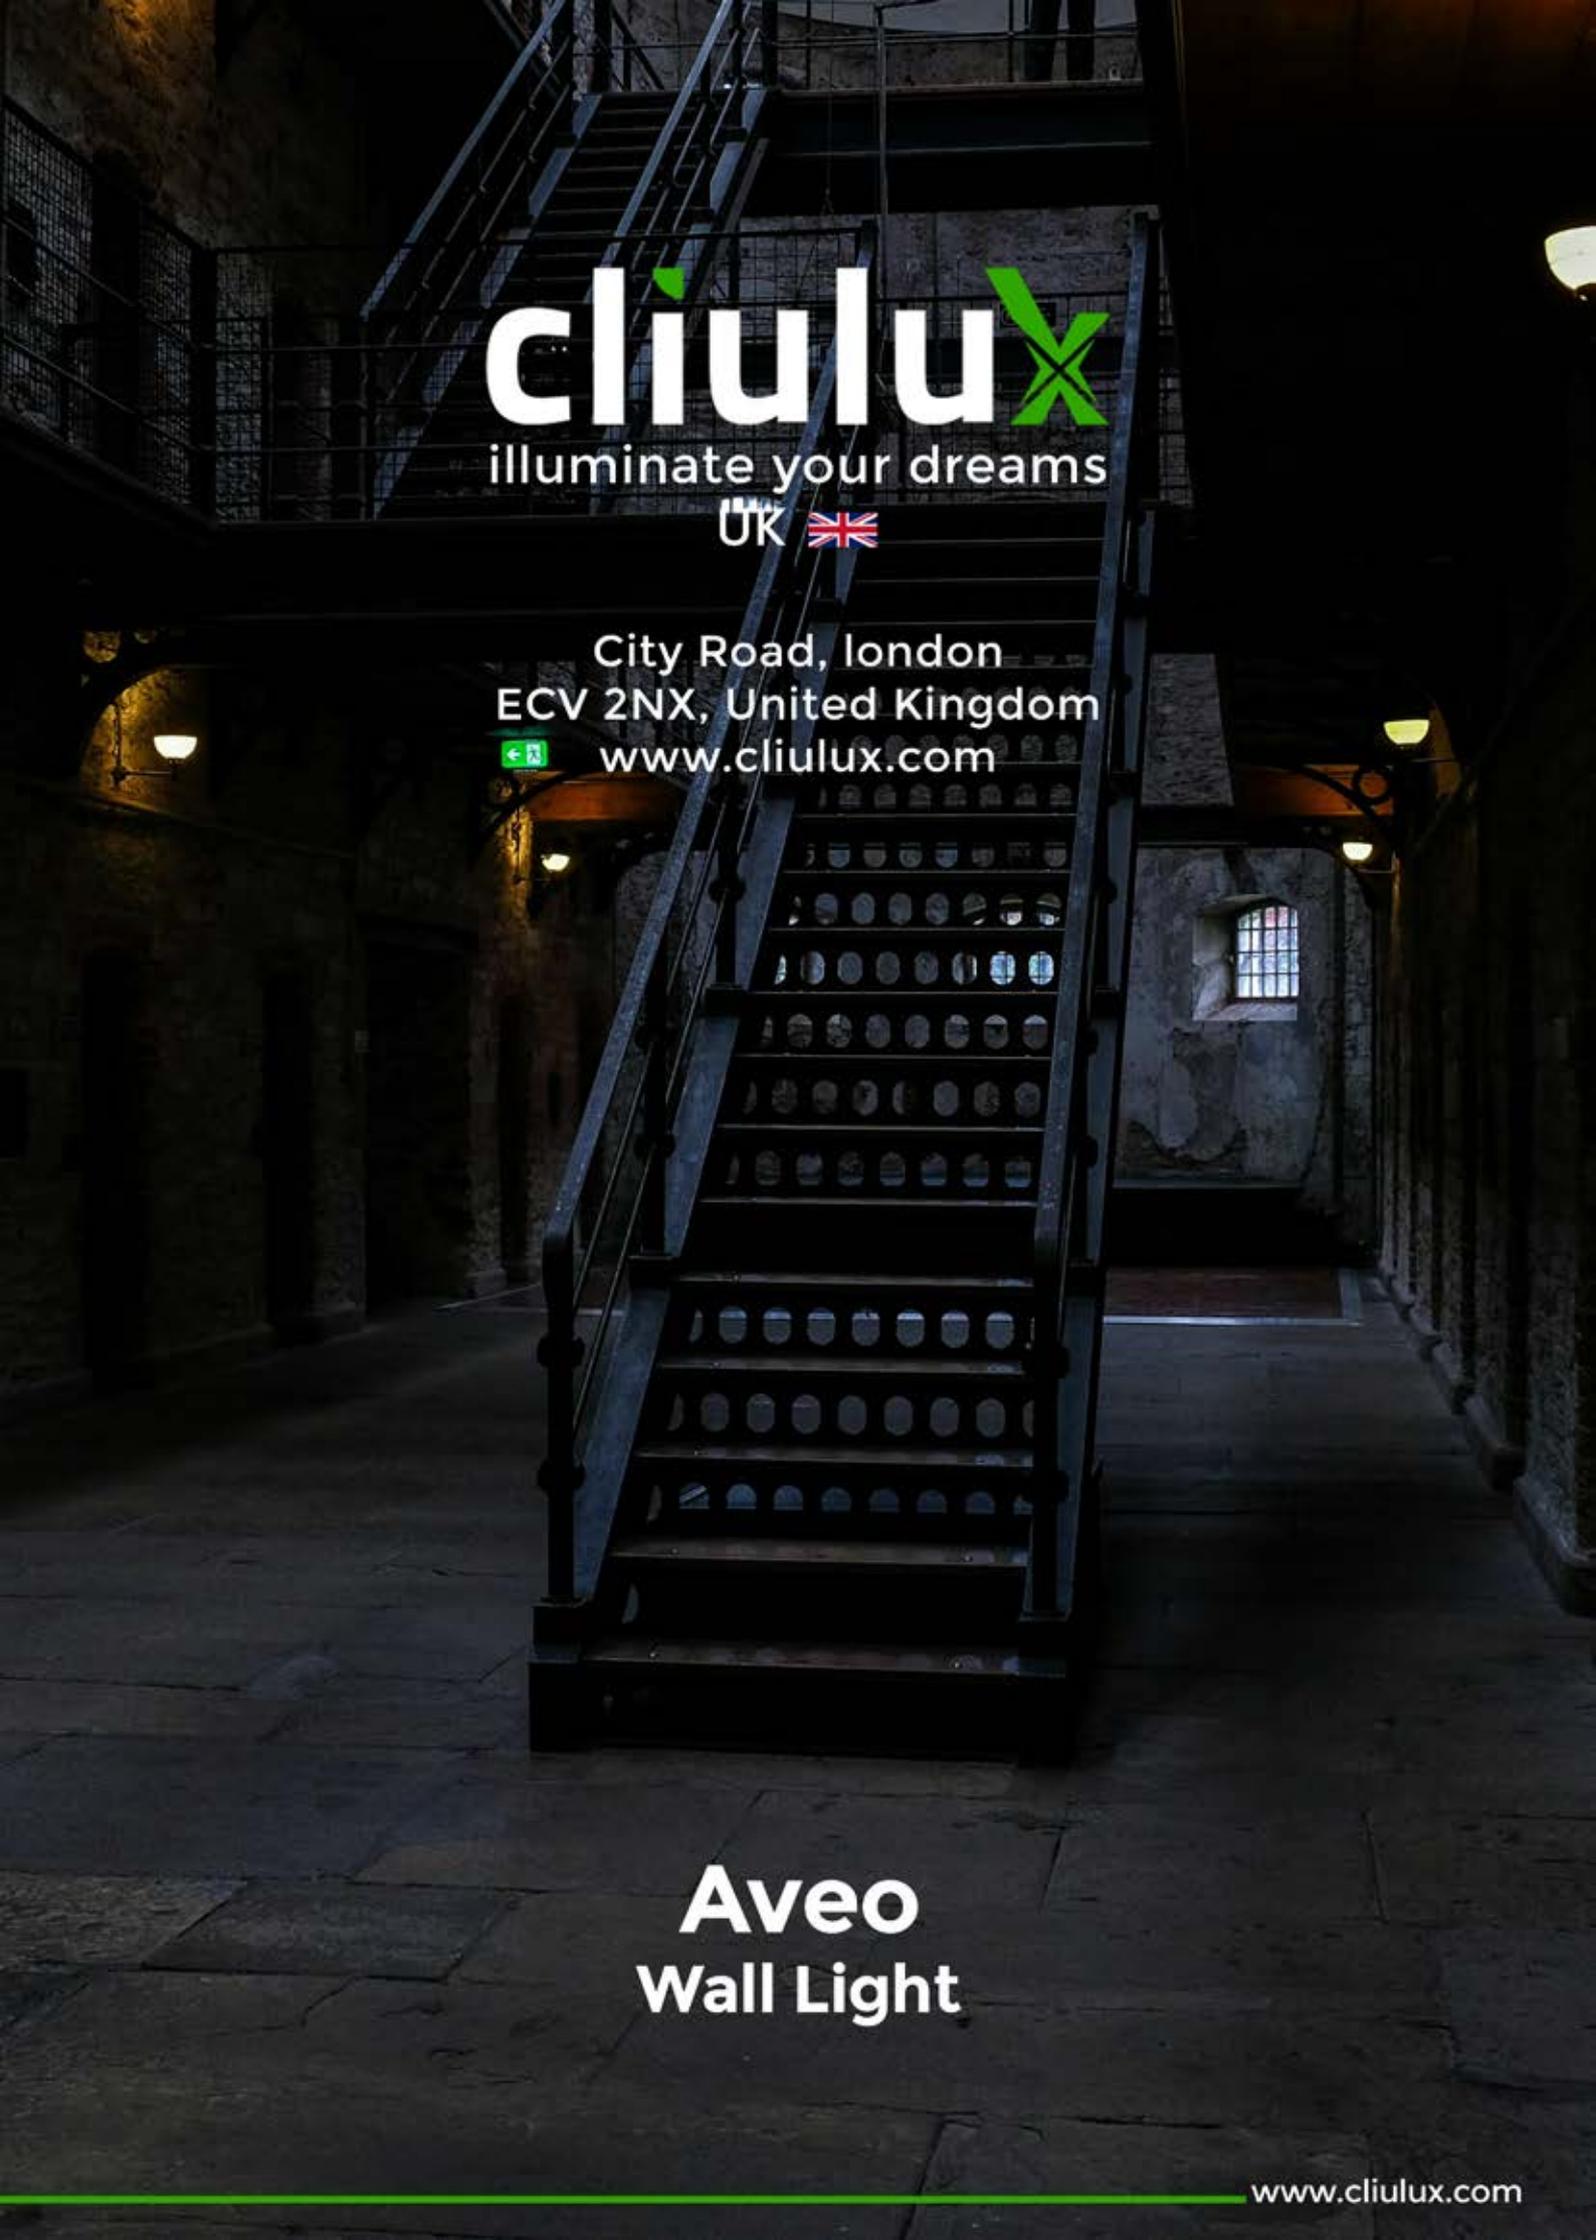

cliulux

illuminate your dreams

UK 

City Road, london
ECV 2NX, United Kingdom
 www.cliulux.com

Aveo
Wall Light