

Crist Linear Light




Crist Linear Light



Product features


- Flexible installation method, recessed slot installation, surface installation and ceiling installation
- Product light-emitting surface made of Mitsubishi Acrylic double-color mixed material, solid three-dimensional light, soft and uniform light effect, 180° viewing angle.
- Standard cable of this product is IP67 one in and one out waterproof connector.
- Mono color, RGBW/Mono color DMX512 control optional
- 6063 aluminum alloy lamp body, stamping aluminum alloy end cap, stainless steel fasteners
- Product pass inspections of third-party inspection agencies, CE certification and qualified inspections by National Lighting Quality Supervision and Inspection Center.

DIMENSION

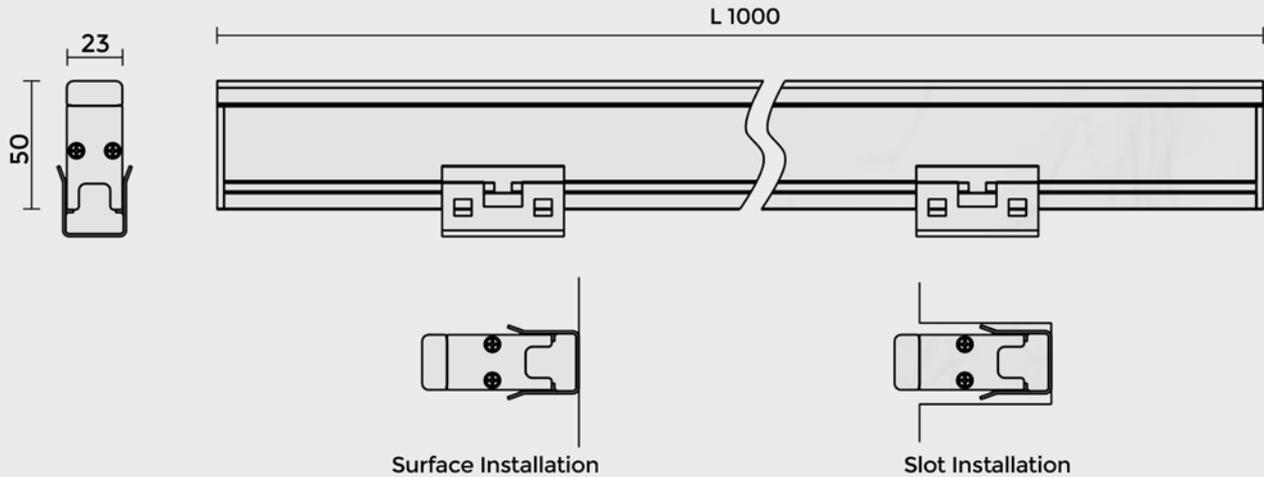


SPECIFICATION

Light distribution	120°
LED brand	Epistar/Cree - 72PCS
Nominal LED power	12 W, 06W, 03W
Input voltage	DC24V
Colour temperature	2700K- 6500K
Control	on/off; 0-10v;DALI;Bluetooth
Impact protection	IK08
Ingress protection	IP66
Driver surge protection	10/6 KV
Power factor	> 0.95
Operation temperature	-40° -- + 50°
Glass/Diffusor	Acrylic
Housing	Corrosion resistant aluminum alloy housing
Lifetime	L90B50>60, 000; LB8050>60, 000
Finishing	Silver grey/ Dark grey /Black & optional RAL color
Through wiring	Single cable entry

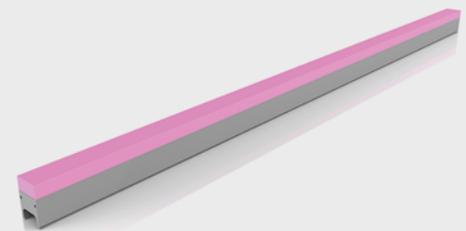


MODEL	Power	RF No	Size
CLX-03CRF2350100	12W	-	1000x23xH50mm
CLX-03CRF2350050	06W	-	500x23xH50mm
CLX-03CRF2350030	03W	-	300x23xH50mm

DIMENSION

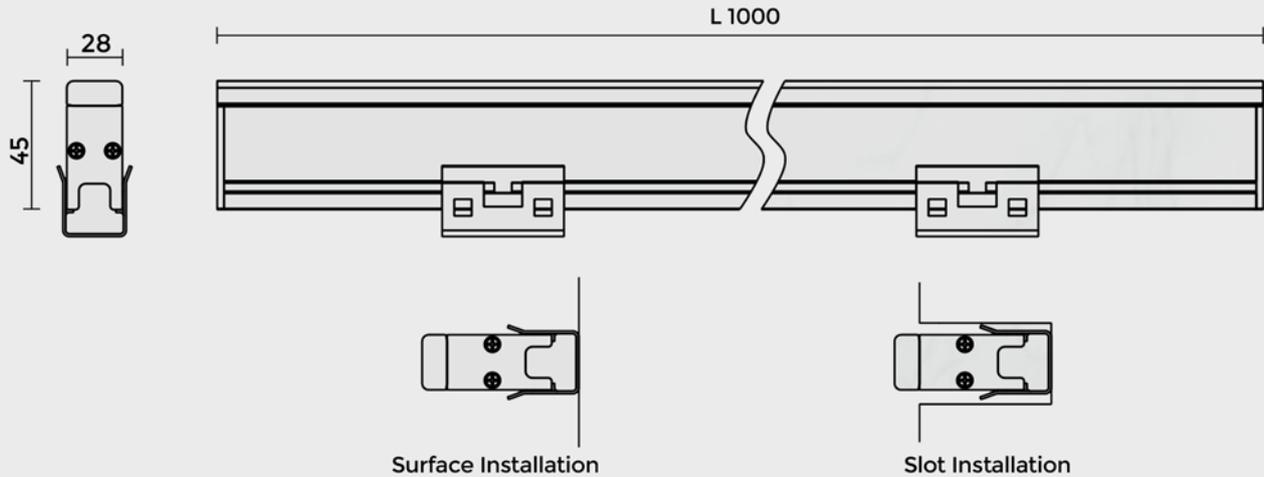


SPECIFICATION


Light distribution	120°
LED brand	Epistar/Cree 4 in 1 - 48PCS
Nominal LED power	15W, 7.5W, 4W
Input voltage	DC24V
Colour temperature	RGBW/RGBA
Control	DMX/RDM
Impact protection	IK08
Ingress protection	IP66
Driver surge protection	10/6 KV
Power factor	> 0.95
Operation temperature	-40° -- + 50°
Glass/Diffusor	Acrylic
Housing	Corrosion resistant aluminum alloy housing
Lifetime	L90B50>60, 000; LB8050>60, 000
Finishing	Silver grey/ Dark grey /Black & optional RAL color
Through wiring	2 cables entry

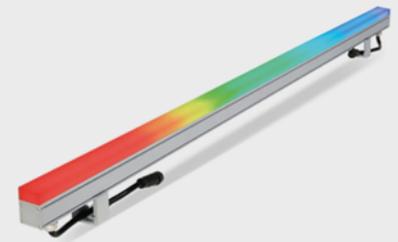

MODEL	Power	RF No	Size
CLX-03CRF2845100 DMX	15W	-	1000x28xH45mm
CLX-03CRF2845050 DMX	7.5W	-	500x28xH45mm
CLX-03CRF2350030 DMX	04W	-	300x28xH45mm

Installation Diagram

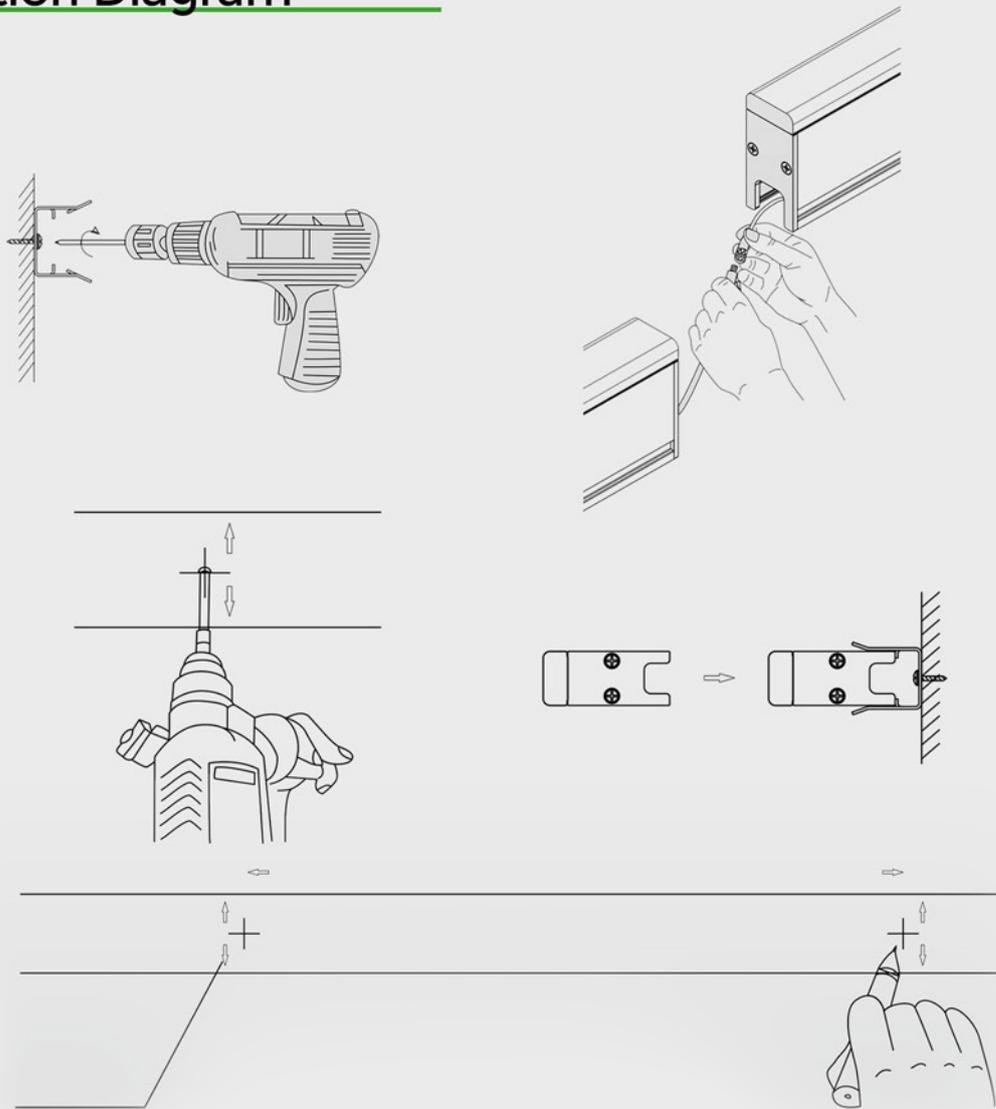

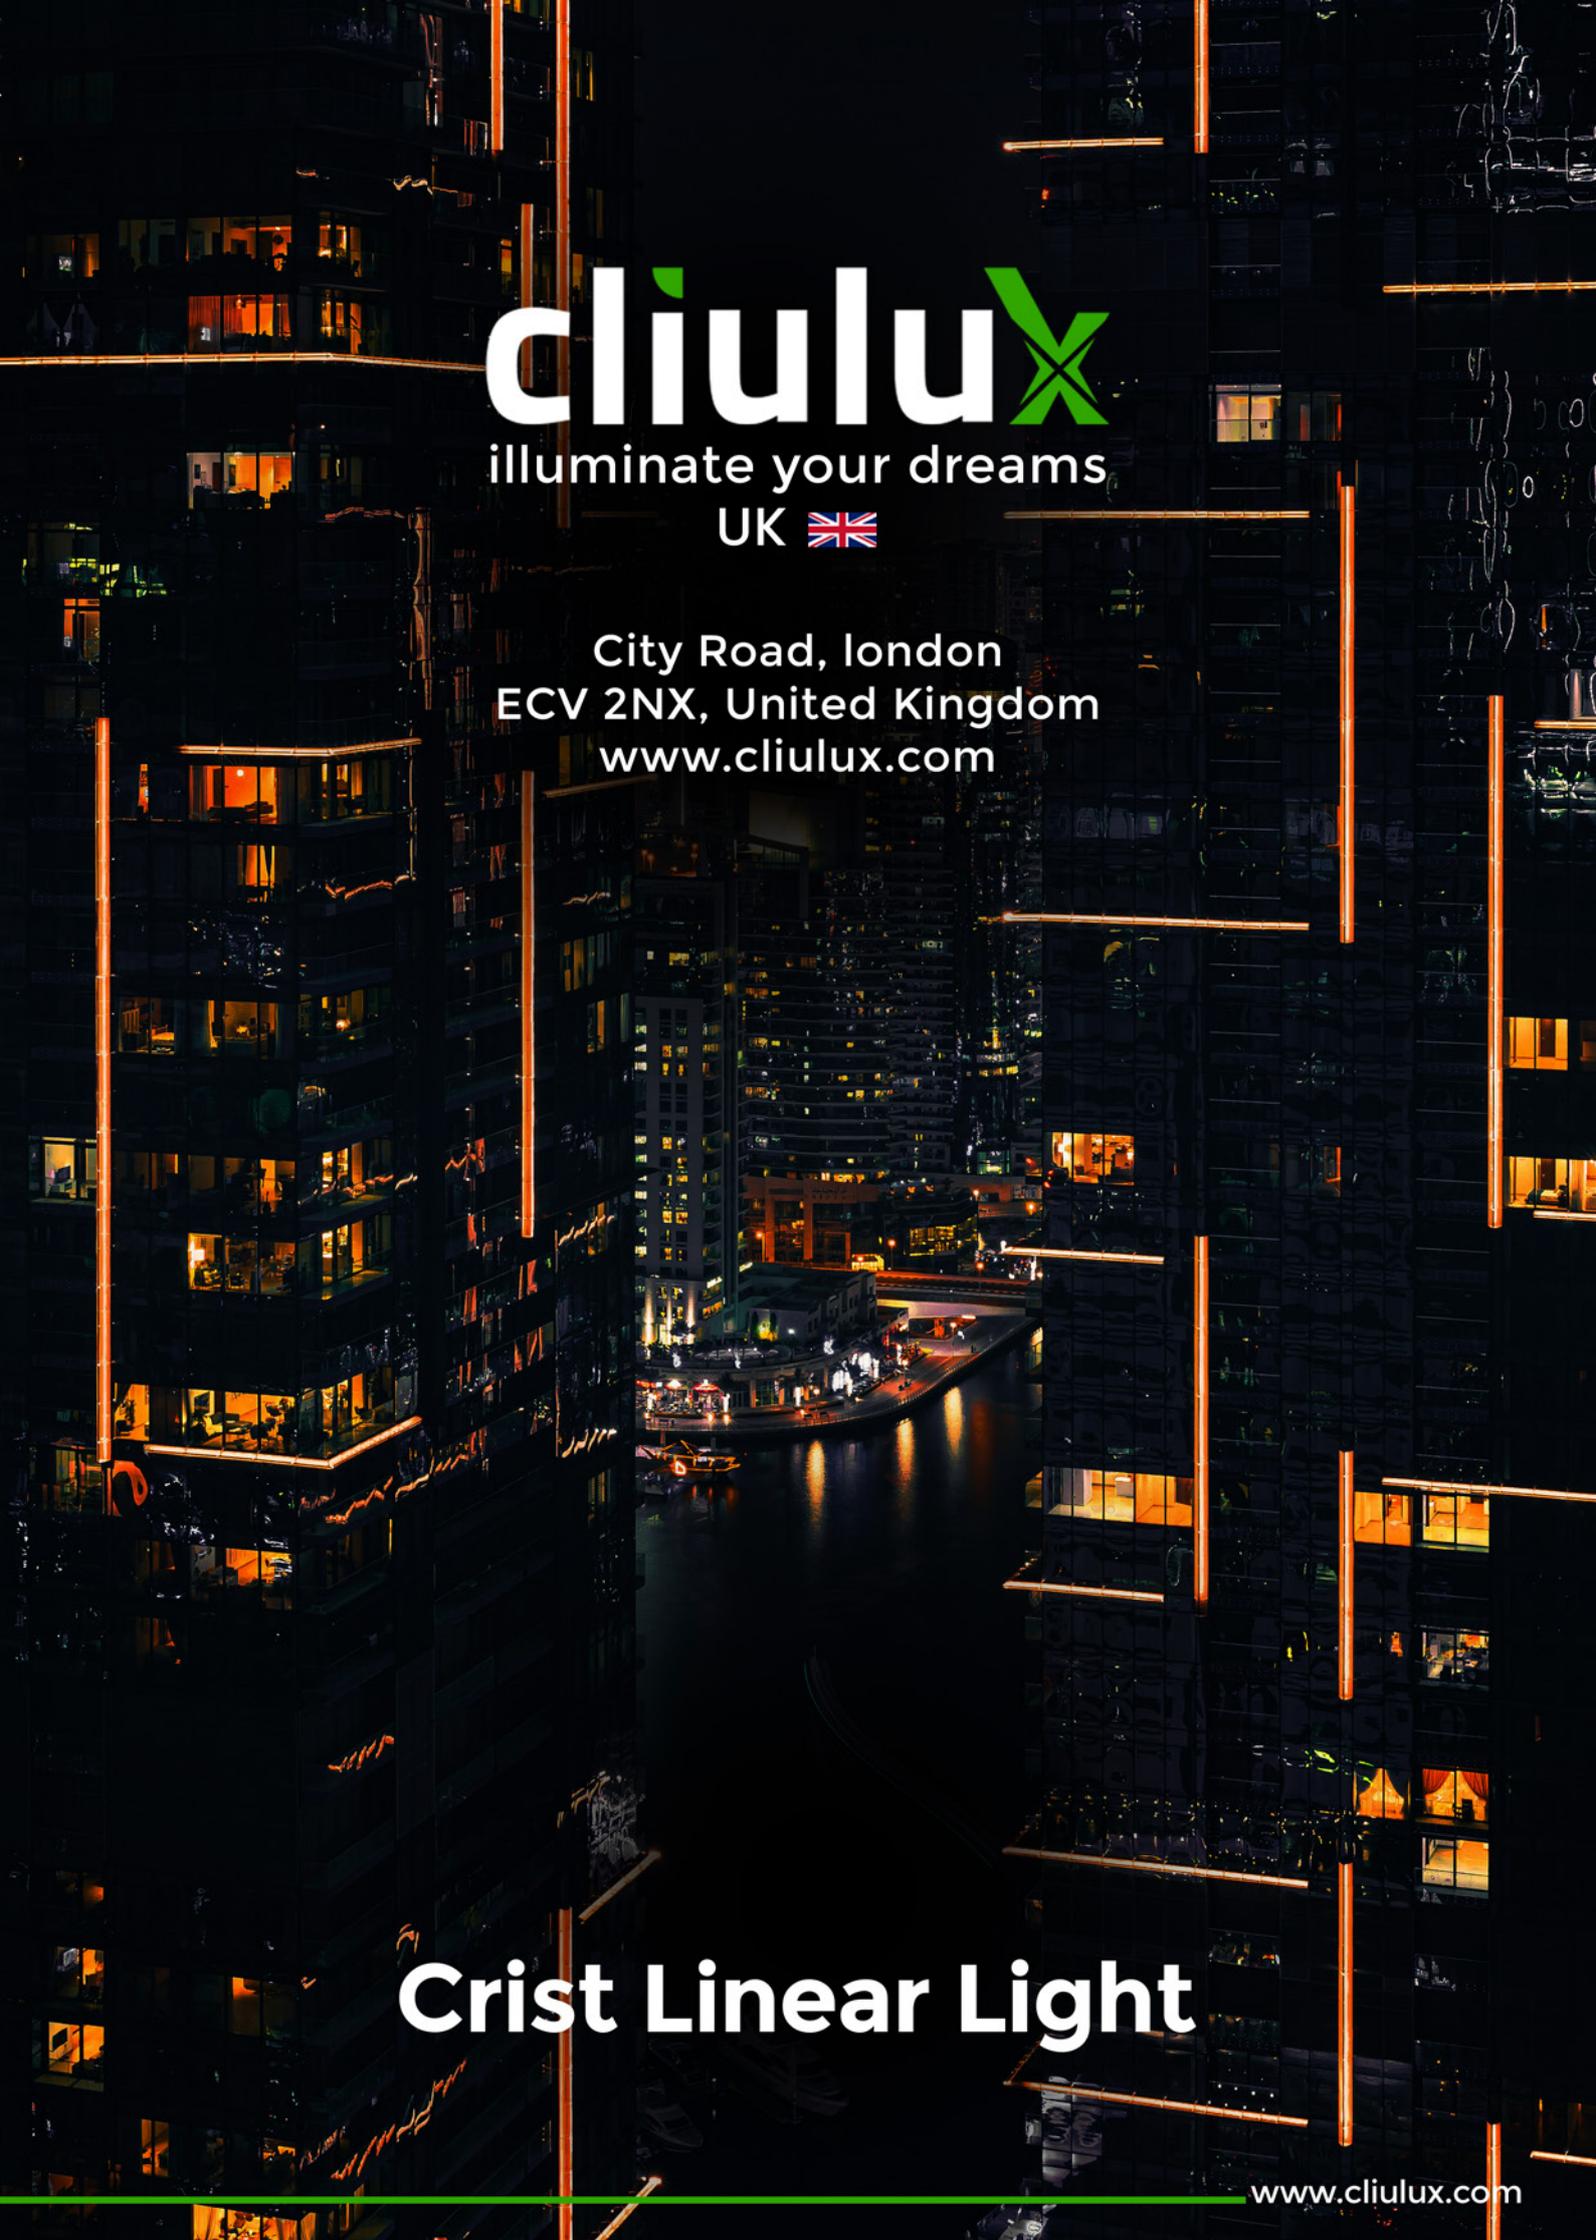

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Crist Linear Light

www.cliulux.com