

Delta

LED High Bay Light



Product features

- 70% energy saving, short ROI period
- Up to 50,000hrs @ L70, low maintenance cost
- Durability, suitable for dry and wet applications
- Versatile in mounting with wall mounted, loop hanging, steel chain hanging
- RoHS compliant, environmental friendly, no mercury or lead, 100% recyclable
- Luminaire efficacy : up to 210 lm/w
- Symmetrical beam angle: 60°, 90°, 110°
- Available from 3000K, 4000K 5000K, 5700K
- Available with Motion /PIR Sensor

Specification Sheet

Electrical Specs

Power	80~200 W
Input Voltage	AC 120~277 Volts
Power Frequency	50/60 Hz
Power Factor	>0.95
Total Harmonic Distortion	<15%(@230V)
Insulation Grade	Class I

Other Details

Lifespan	≥50,000 Hours
Operating Temperature	-30°C~50°C
LED Driver Spec	SOSEN, SUNCOM, PHILIPS
LED Spec	SMD 2835
Dimming	DALI,0-10V,PWM,Smart control management system


Model	Power	CCT	Luminous Flux	Beam Angle	Size
CLX- 11DH260UFO100W	100W	3000K-5700K	14500-20000 lm	60°, 90°, 120°	Ø258 x H158mm
CLX- 11DH260UFO150W	150W	3000K-5700K	22000-30000 lm	60°, 90°, 120°	Ø258 x H158mm
CLX- 11DH300UFO200W	200W	3000K-5700K	30000-40000 lm	60°, 60°, 90°, 120°	Ø300 x H155mm




Light Distribution Curve




120°

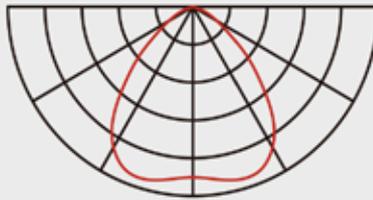

90°

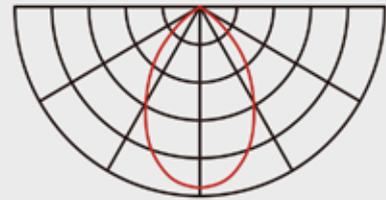

60°

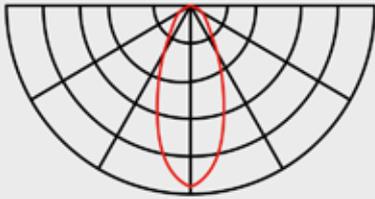


45°

Remark:



120°/60°/90° For Both Sizes

45° for Dia. 300 x H160 mm only


Dimensions (mm)

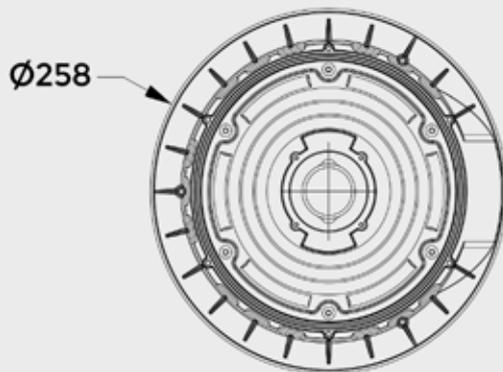

80~150 W

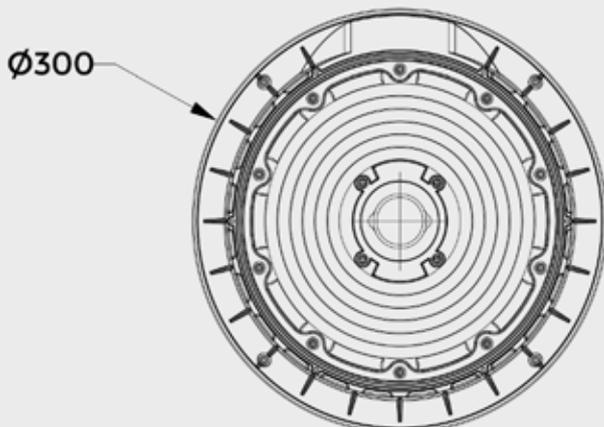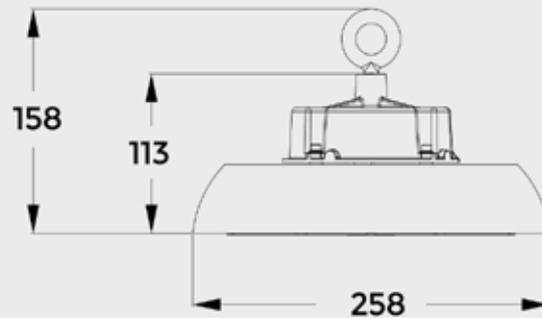

200 W

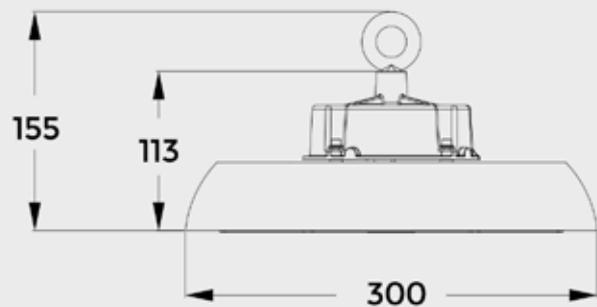

Characteristics



Zhaga

Plug & Play Zhaga Sensor

- Factory Default Setting: Detection area 100%/Hold time 5s/Daylight threshold Disable/Stand-by period 0s/Stand-by dimming level 10%.
- Zhaga interface, multiple sensors are optional. Zigbee/Bluetooth/2.4G Group


Emergency Module



Emergency Wattage	8W,10W
Emergency Onversion Time	< 1S
Emergency Operation Time	3.0 or 1.5 Hours
Protection	IP 65, Class I
Ambient Temperature Range	0° C to 50° C



Characteristics

Blue = Neutral (N)
Gree/Yellow = Earth (\oplus)
Brown = Live (L)

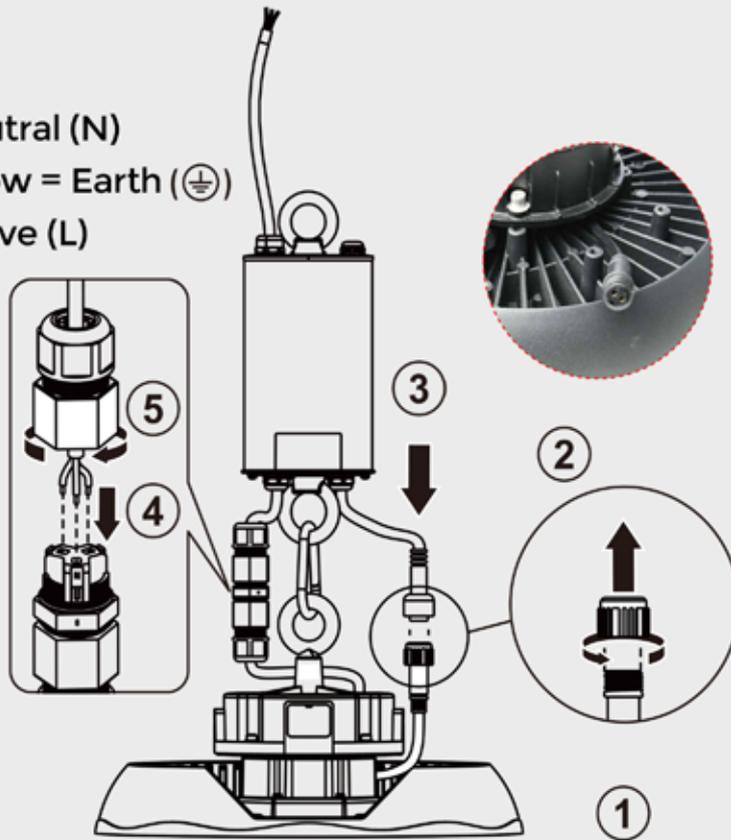

Details


Durable Hook

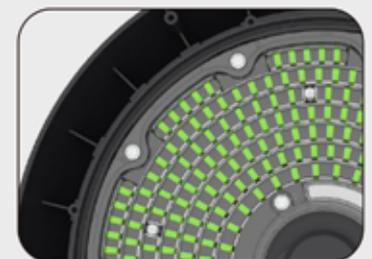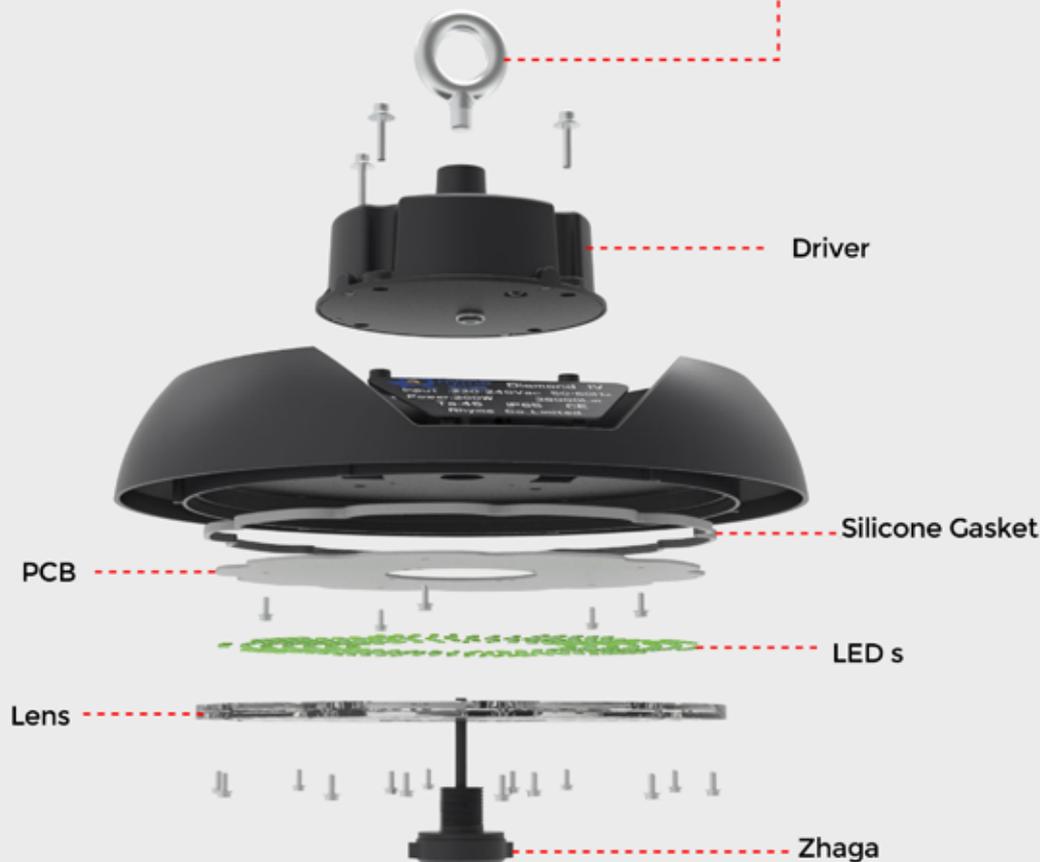


Less glare and spill
light by recessed structure

Reflector

Dia: 260 mm

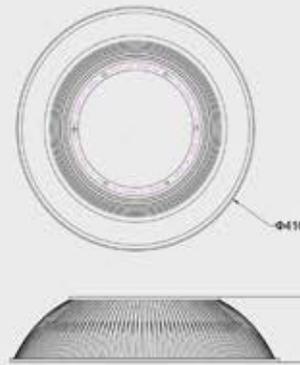


PC (90°)

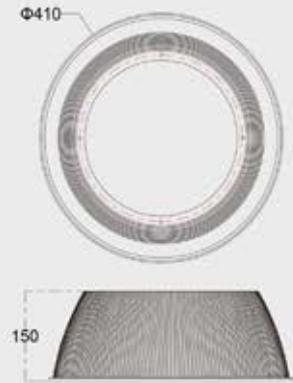


PC (90°)

Dia: 300 mm

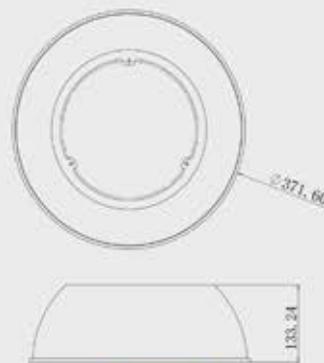

All (100°)

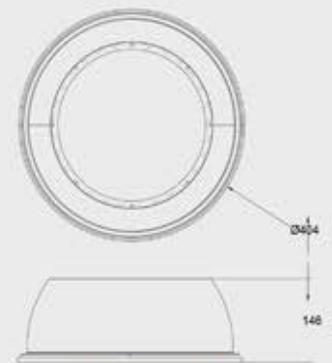

All (100°)

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com



Delta
LED High Bay Light

www.cliulux.com