

IP 65 Flood Light



Zlov

IP65 Flood Light



Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips or Bridgelux.
- Lumen efficacy 100 to 130lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Highest Ingress Protection Rating

Classification

| Class II | CCT |
|----------------|-------------------|
| 220 to 240VAC | 2700K,4000K,6500K |
| 50Hz / PF:>0.9 | |




LED Light Engine

- Philips or Bridgelux LED Chips
- Lifespan : >50,000 + hrs
- Operating Temperature : -40°C~+50°C
- Working Environment : -40°C~+50°C, 20%-90% H.R
- Storage temperature: -40°C~+85°C, 10%-90% H.R
- No Toxic chemicals / RoHS Compliant
- 70%-80% Energy Saving Compared with HPS/MH

Electrical Characteristics

- Wide AC Input : 100-305 V
- Power Factor : ~0.95
- Total Harmonic Distortion : < 15%
- Surge Protection : IEC62471
- EMC test standard
- Meanwell ELG / Inventronics Drivers
- Easy&Simply Installation - plug and play
- Wall Mount / Ceiling Mount Bracket
- Adjustable Mount Angle
- Impact Grade: IK08

Dimension

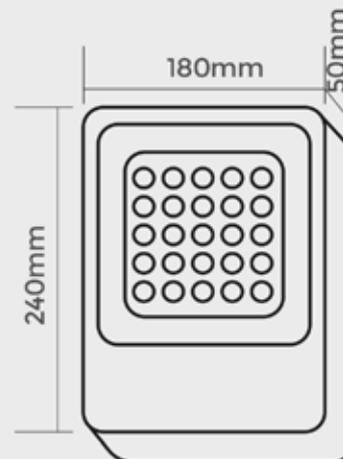

| Model | Power | CCT | Luminous Efficiency | Beam Angle | Size |
|-------------------|-------|-------------|---------------------|----------------|------------------|
| CLX-06ZV 150F020W | 20W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 150 x 113 x 40mm |
| CLX-06ZV 250F050W | 50W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 240 x 180 x 50mm |
| CLX-06ZV 315F100W | 100W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 315 x 240 x 65mm |
| CLX-06ZV 415F200W | 200W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 415 x 315 x 70mm |

Glaz

IP65 Flood Light



Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips or Bridgelux.
- Lumen efficacy 100 to 130lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Highest Ingress Protection Rating

Classification

| Class II | CCT |
|----------------|-------------------|
| 220 to 240VAC | 2700K,4000K,6500K |
| 50Hz / PF:>0.9 | |




LED Light Engine

- Philips or Bridgelux LED Chips
- Lifespan : >50,000 + hrs
- Operating Temperature : -40°C~+50°C
- Working Environment : -40°C~+50°C, 20%-90% H.R
- Storage temperature: -40°C~+85°C, 10%-90% H.R
- No Toxic chemicals / RoHS Compliant
- 70%-80% Energy Saving Compared with HPS/MH

Electrical Characteristics

- Wide AC Input : 100-305 V
- Power Factor : ~0.95
- Total Harmonic Distortion : < 15%
- Surge Protection : IEC62471
- EMC test standard
- Meanwell ELG / Inventronics Drivers
- Easy&Simply Installation - plug and play
- Wall Mount / Ceiling Mount Bracket
- Adjustable Mount Angle
- Impact Grade: IK08

Dimension

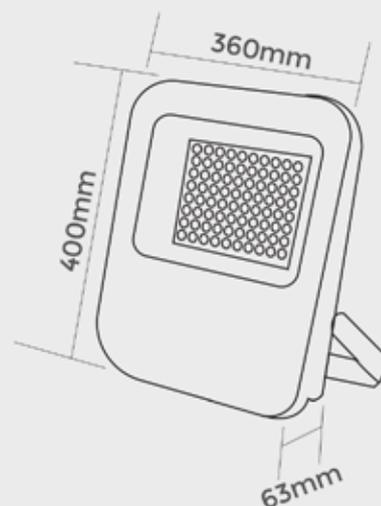

| Model | Power | CCT | Luminous Efficiency | Beam Angle | Size |
|--------------------|-------|-------------|---------------------|----------------|------------------|
| CLX-06 GL 210F050W | 50W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 210 x 242 x 50mm |
| CLX-06 GL 257F100W | 100W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 257 x 286 x 60mm |
| CLX-06 GL 310F200W | 200W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 310 x 346 x 62mm |
| CLX-06 GL 400F300W | 300W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 400 x 360 x 63mm |

Ligo

IP65 Flood Light




Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips or Bridgelux.
- Lumen efficacy 100 to 130lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Highest Ingress Protection Rating

Classification

| Class II | CCT |
|----------------|-------------------|
| 220 to 240VAC | 2700K,4000K,6500K |
| 50Hz / PF:>0.9 | |

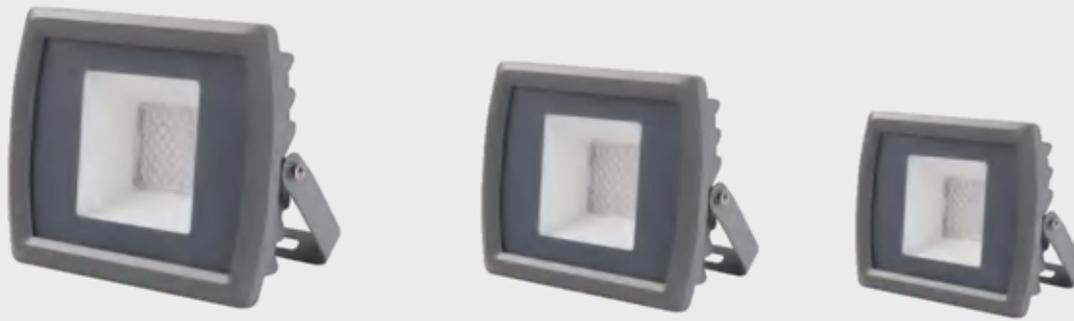


LED Light Engine

- Philips or Bridgelux LED Chips
- Lifespan : >50,000 + hrs
- Operating Temperature : -40°C~+50°C
- Working Environment : -40°C~+50°C, 20%-90% H.R
- Storage temperature: -40°C~+85°C, 10%-90% H.R
- No Toxic chemicals / RoHS Compliant
- 70%-80% Energy Saving Compared with HPS/MH


Electrical Characteristics

- Wide AC Input : 100-305 V
- Power Factor : ~0.95
- Total Harmonic Distortion : < 15%
- Surge Protection : IEC62471
- EMC test standard
- Meanwell ELG / Inventronics Drivers
- Easy&Simply Installation - plug and play
- Wall Mount / Ceiling Mount Bracket
- Adjustable Mount Angle
- Impact Grade: IK08

Dimension

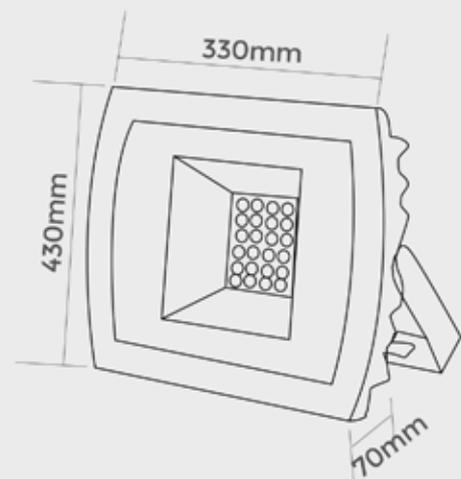

| Model | Power | CCT | Luminous Efficiency | Beam Angle | Size |
|--------------------|-------|-------------|---------------------|----------------|------------------|
| CLX-06 LG 230F050W | 50W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 230 x 183 x 65mm |
| CLX-06 LG 270F100W | 100W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 270 x 215 x 65mm |
| CLX-06 LG 360F200W | 200W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 360 x 300 x 65mm |
| CLX-06 LG 430F300W | 300W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 430 x 330 x 70mm |
| CLX-06 LG 540F400W | 400W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 540 x 340 x 70mm |
| CLX-06 LG 650F500W | 500W | 2700K-6500K | 150lm/w | 60°, 90°, 120° | 650 x 360 x 80mm |

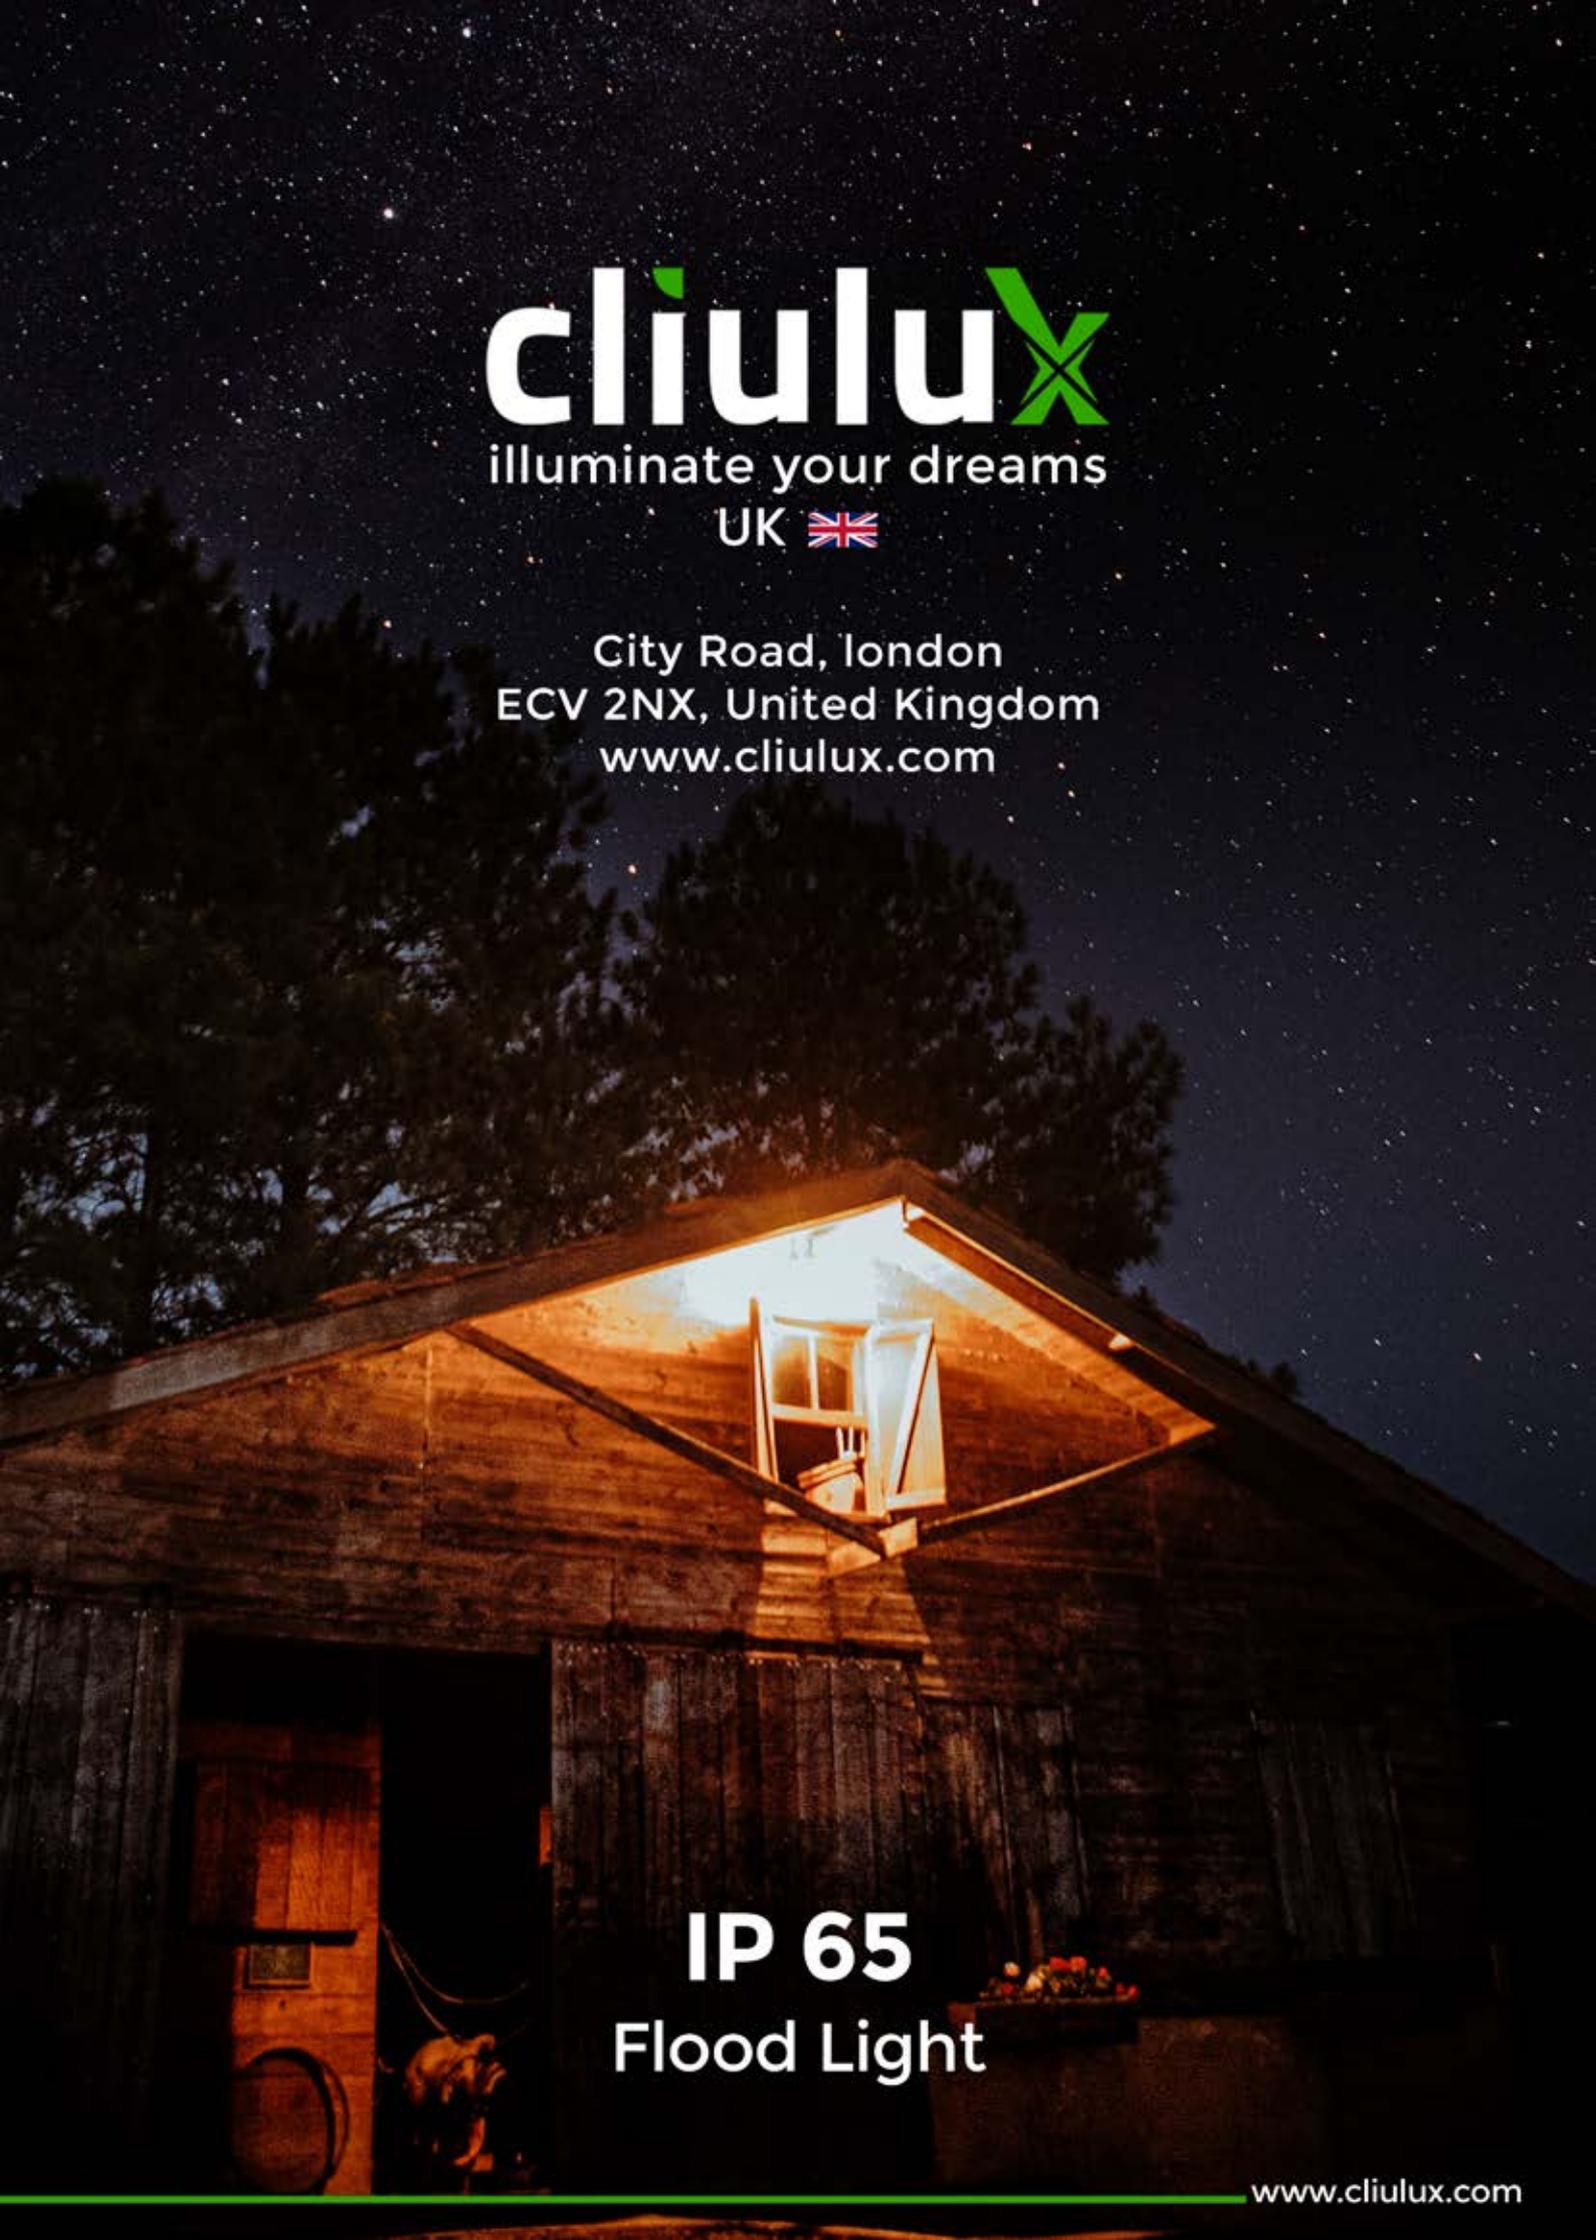

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

IP 65
Flood Light

www.cliulux.com