

Pundo XL



Pundo XL




Product features

- Perfect structure designed die- cast aluminium with opal diffuser
- High Performance Diffuser and reflector with different beam angle
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Cree, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming
- **Surface or suspended option**


Dimension



Surface or suspended option



	MODEL	Power	CCT	Luminous Efficiency	Beam Angle	Size	Voltage
ROUND	CLX-05 PD09010WSR	10W	3000K-6500K	80lm/w	20° 45°	Ø110 x H120mm	220 - 240VAC
	CLX-05 PD13025WSR	25W	3000K-6500K	80lm/w	20° 45°	Ø130 x H152mm	220 - 240VAC
	CLX-05 PD17035WSR	35W	3000K-6500K	100lm/w	20° 45°	Ø170 x H185mm	220 - 240VAC
	CLX-05 PD19345WSR	45W	3000K-6500K	100lm/w	20° 45°	Ø193 x H193mm	220 - 240VAC
SQUARE	CLX-05 PD2X09010WSQ	10W	3000K-6500K	80lm/w	20° 45°	90x90xH90mm	220 - 240VAC
	CLX-05 PD2X11020WSQ	20W	3000K-6500K	80lm/w	20° 45°	110x110xH120mm	220 - 240VAC
	CLX-05 PD2X13030WSQ	30W	3000K-6500K	100lm/w	20° 45°	130x130xH135mm	220 - 240VAC
	CLX-05 PD2X16040WSQ	40W	3000K-6500K	100lm/w	20° 45°	160x160xH165mm	220 - 240VAC

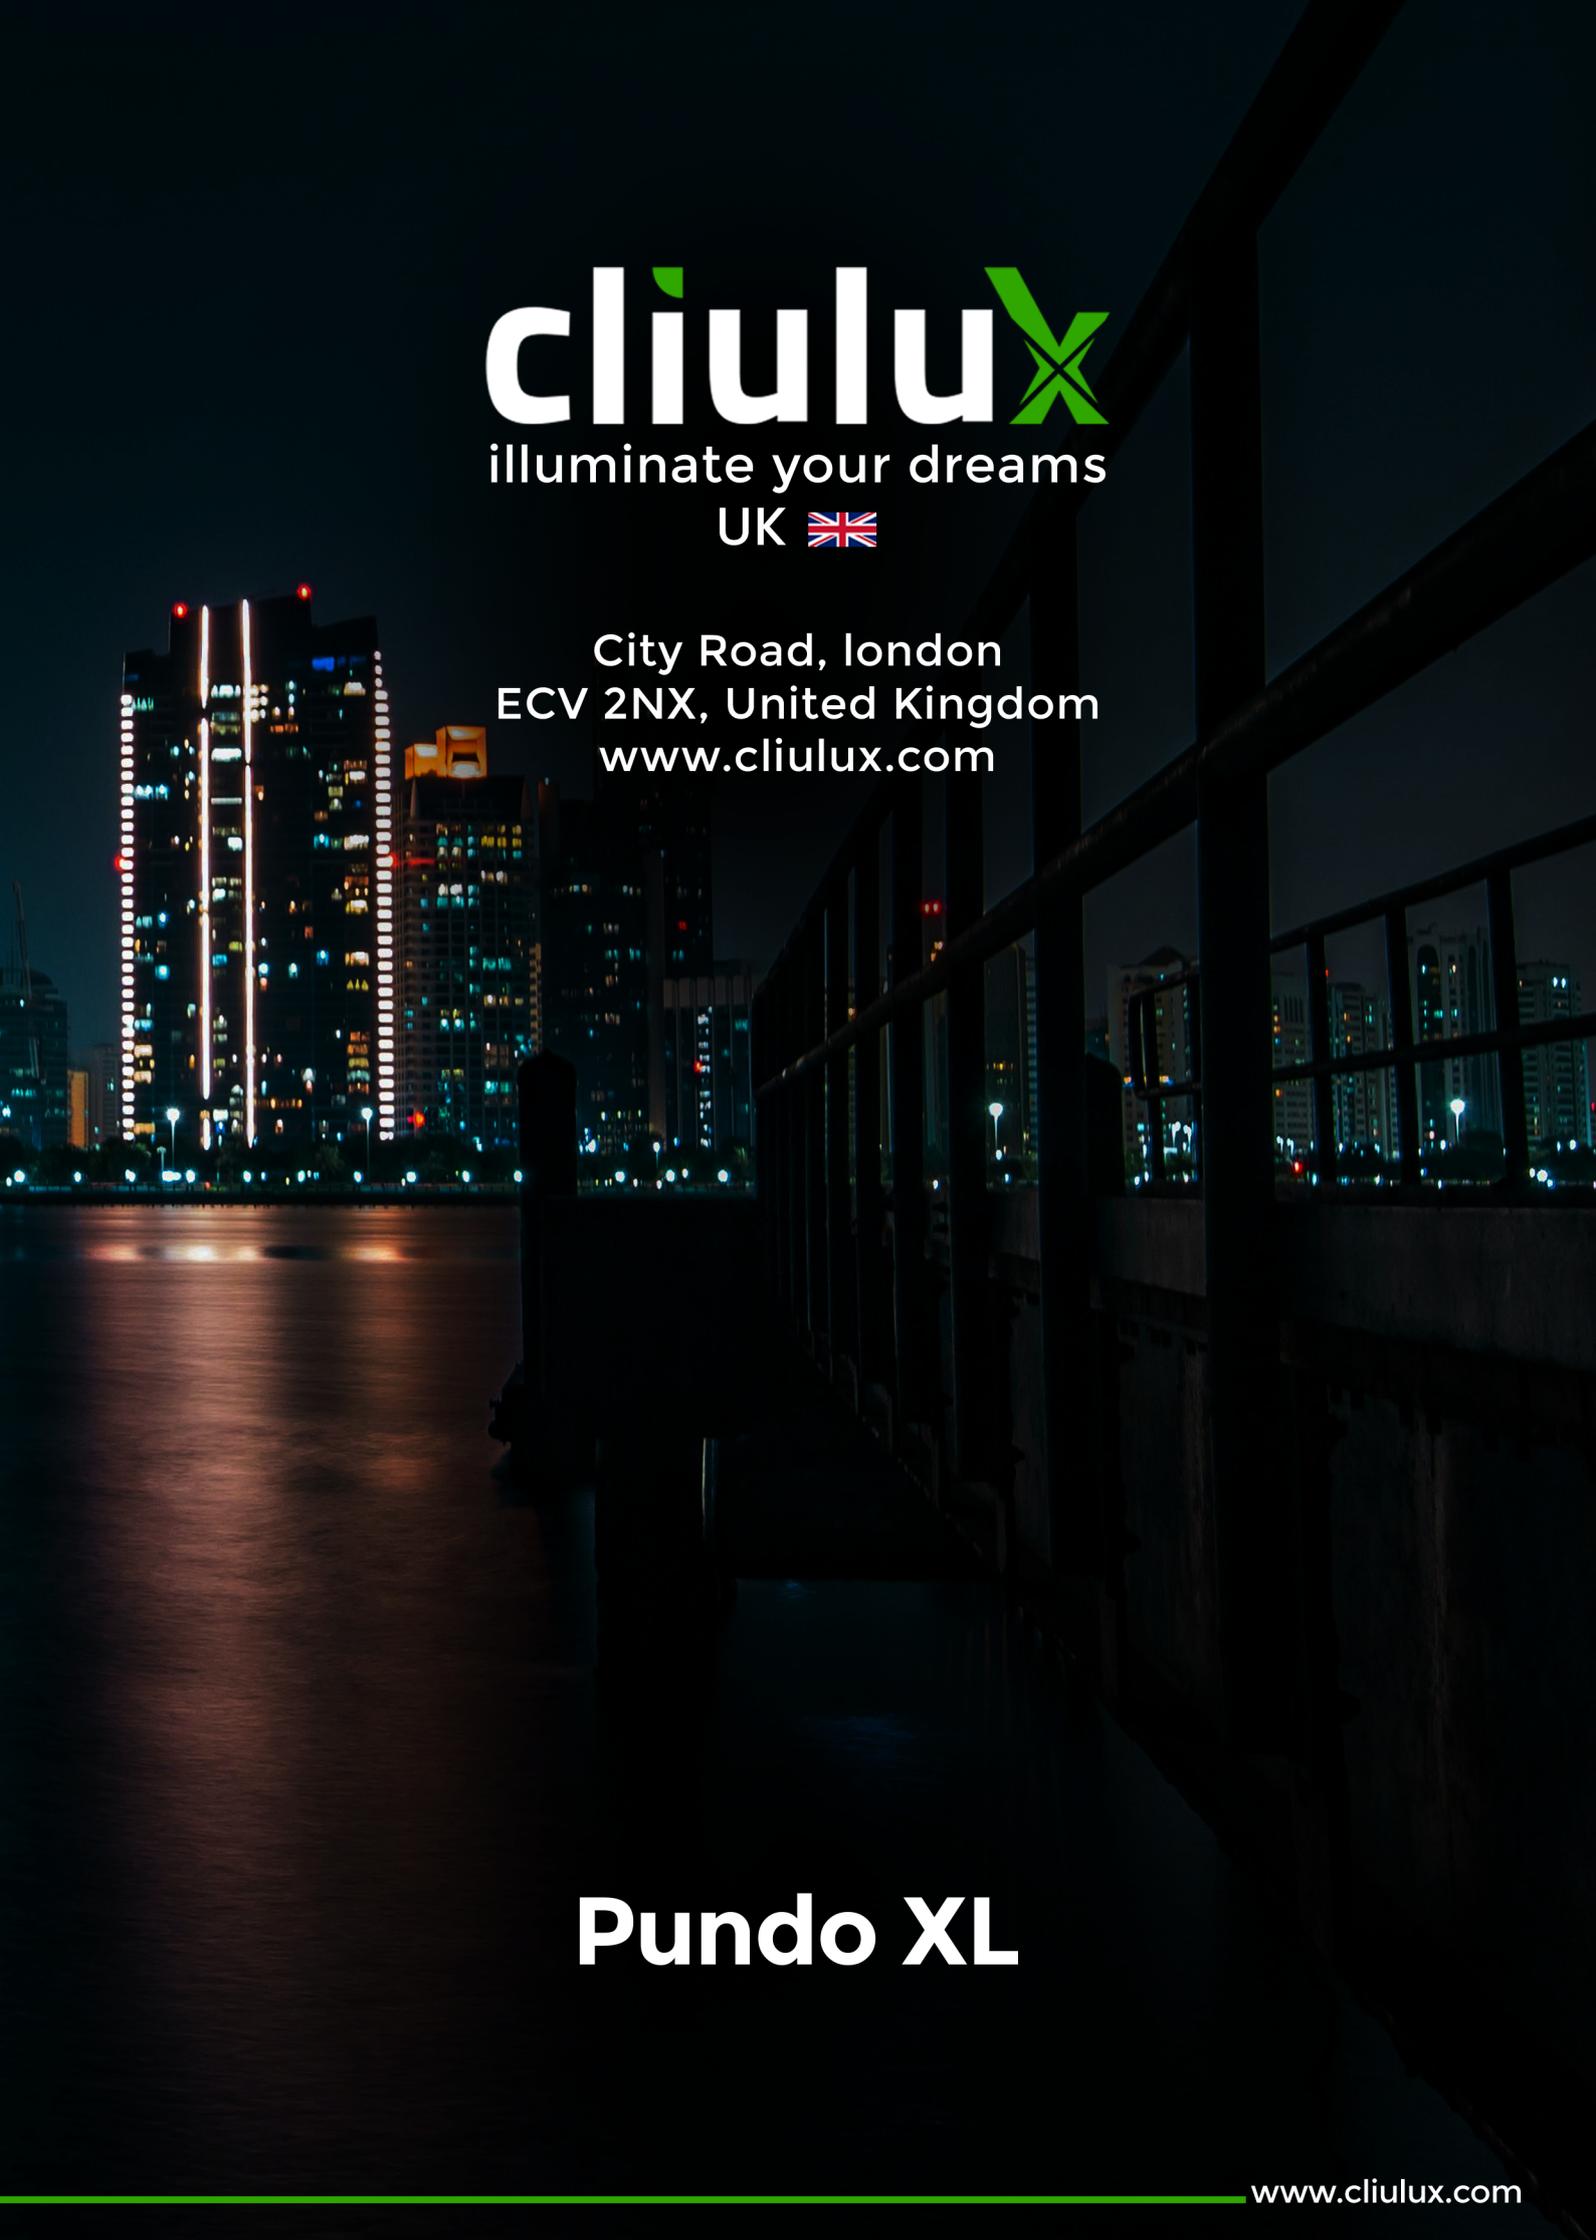

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Pundo XL