

# Reviro Down light



# Reviro Down Light



Waterproof



## Product features

- Perfect structure designed die-cast aluminium with Lens diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install Recessed ceiling fitting.
- Lumen maintenance >L70 at end of life and Philips, Cree , Epistar.etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming

## Classification

Class II


100 to 240VAC 50Hz

Led Driver: IP 67


CCT

3000K,4000K,6500K


## Luminous Intensity Distribution Curve

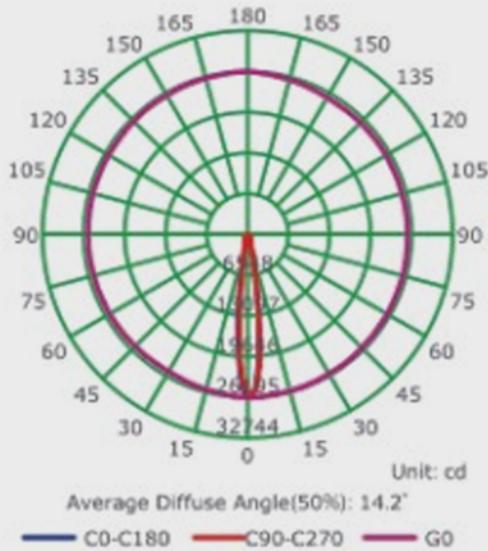

## Illuminance at a Distance

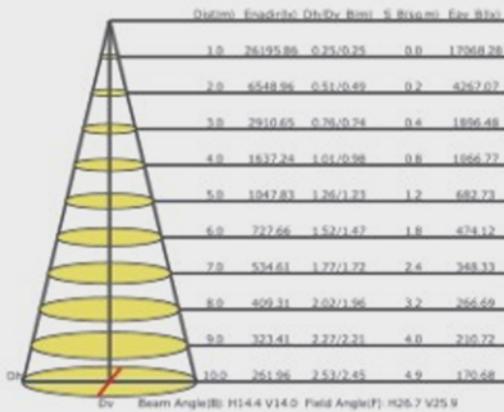

MODEL	Power	CCT	Luminous Efficiency	Beam Angle	Size	RF No	Cut-out
CLX-05RO 085IP10W	10W	3000K-6500K	100lm/w	60°	Ø85 x H54mm	4274	Ø75mm
CLX-05RO 105IP15W	15W	3000K-6500K	100lm/w	60°	Ø105 x H65mm	4275	Ø95mm
CLX-05RO 131IP25W	25W	3000K-6500K	100lm/w	60°	Ø131 x H75mm	4276	Ø115mm
CLX-05RO 150IP35W	35W	3000K-6500K	100lm/w	60°	Ø150 x H80mm	4277	Ø135mm
CLX-05RO 200IP50W	50W	3000K-6500K	100lm/w	60°	Ø215 x H105mm	4278	Ø200mm

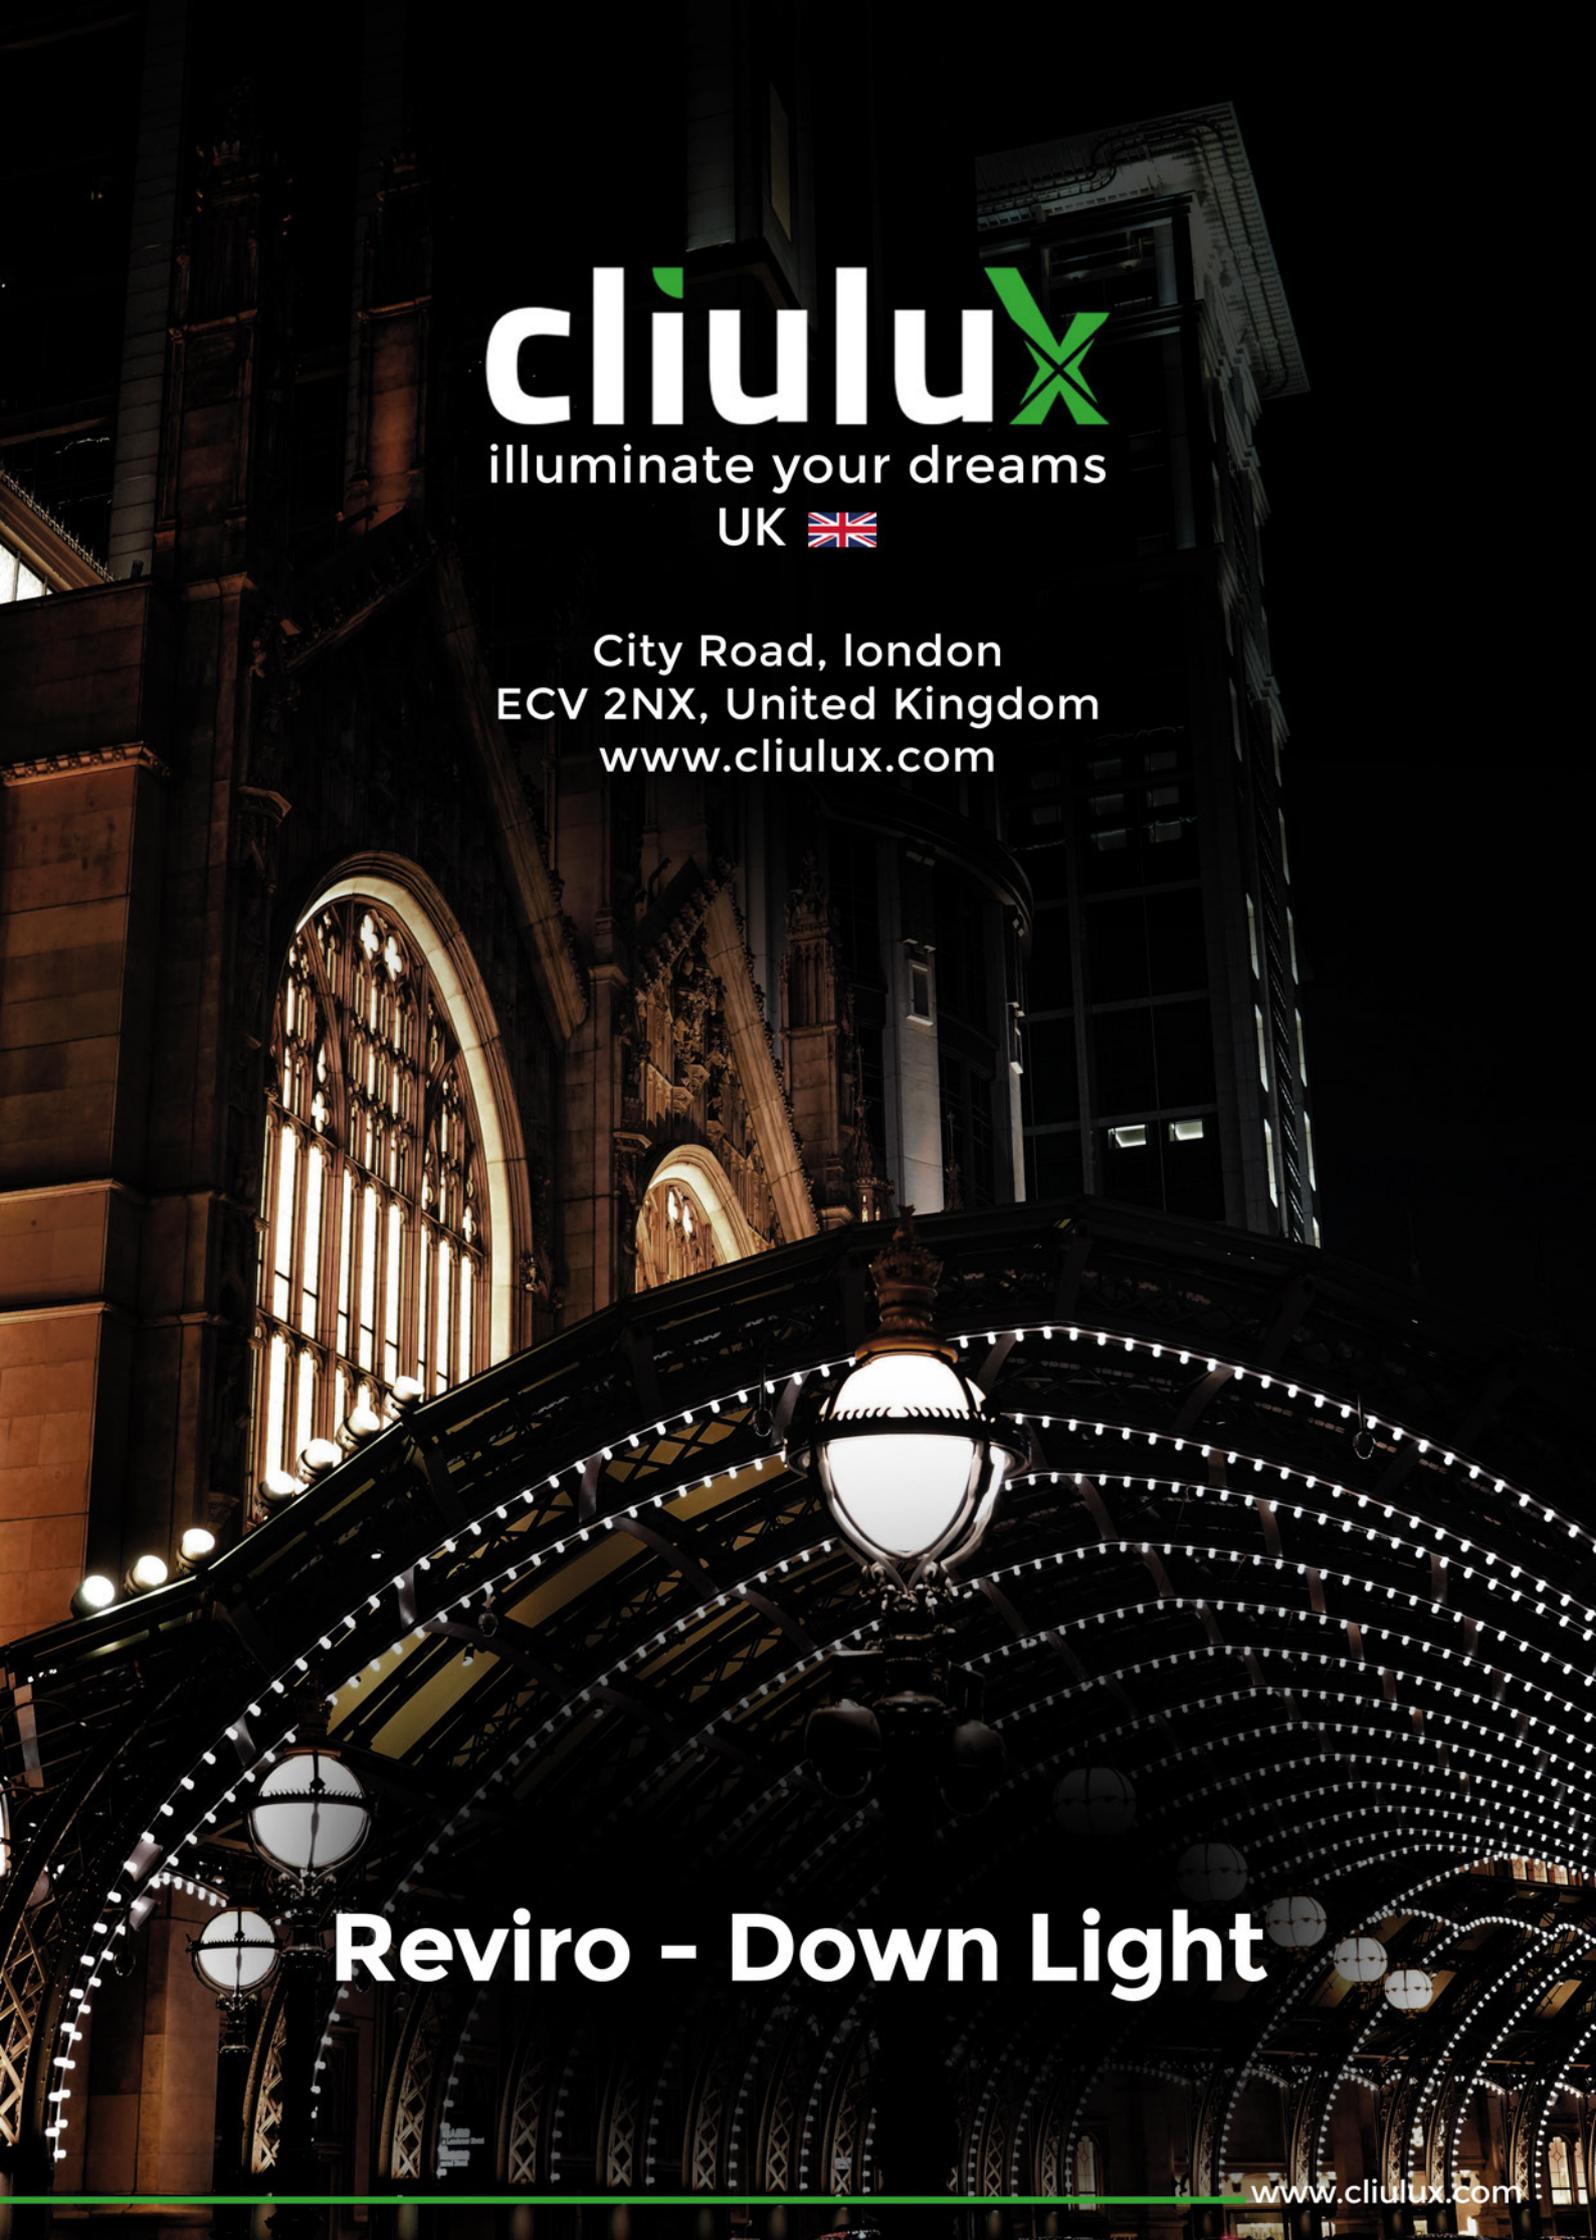

**cliulux**

illuminate your dreams

UK 

City Road, London  
ECV 2NX, United Kingdom  
[www.cliulux.com](http://www.cliulux.com)

**Reviro - Down Light**

[www.cliulux.com](http://www.cliulux.com)