

# Rings Pendent Light



# Rings

## Pendent light



## Product features


- Perfect structure designed die- cast aluminium with opal diffuser
- High Performance Diffuser and reflector with different beam anglese
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Cree, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to>70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming
- **Surface or suspended option**


MODEL	Power	CCT	Luminous Efficiency	Beam Angle	Size	Voltage
CLX-A1 45025050W	50W	3000K-6500K	80lm/w	120°	450x80H & 250x80H mm	220 - 240VAC
CLX-A1 800045090W	90W	3000K-6500K	80lm/w	120°	800x80H & 450x80H mm	220 - 240VAC

## Optional single Rings



## Dimension

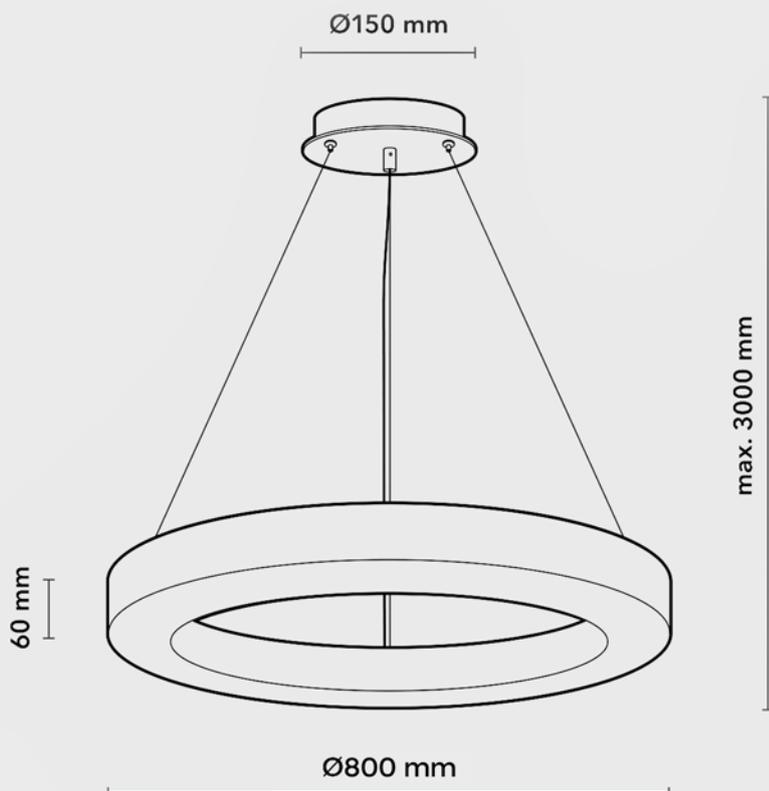

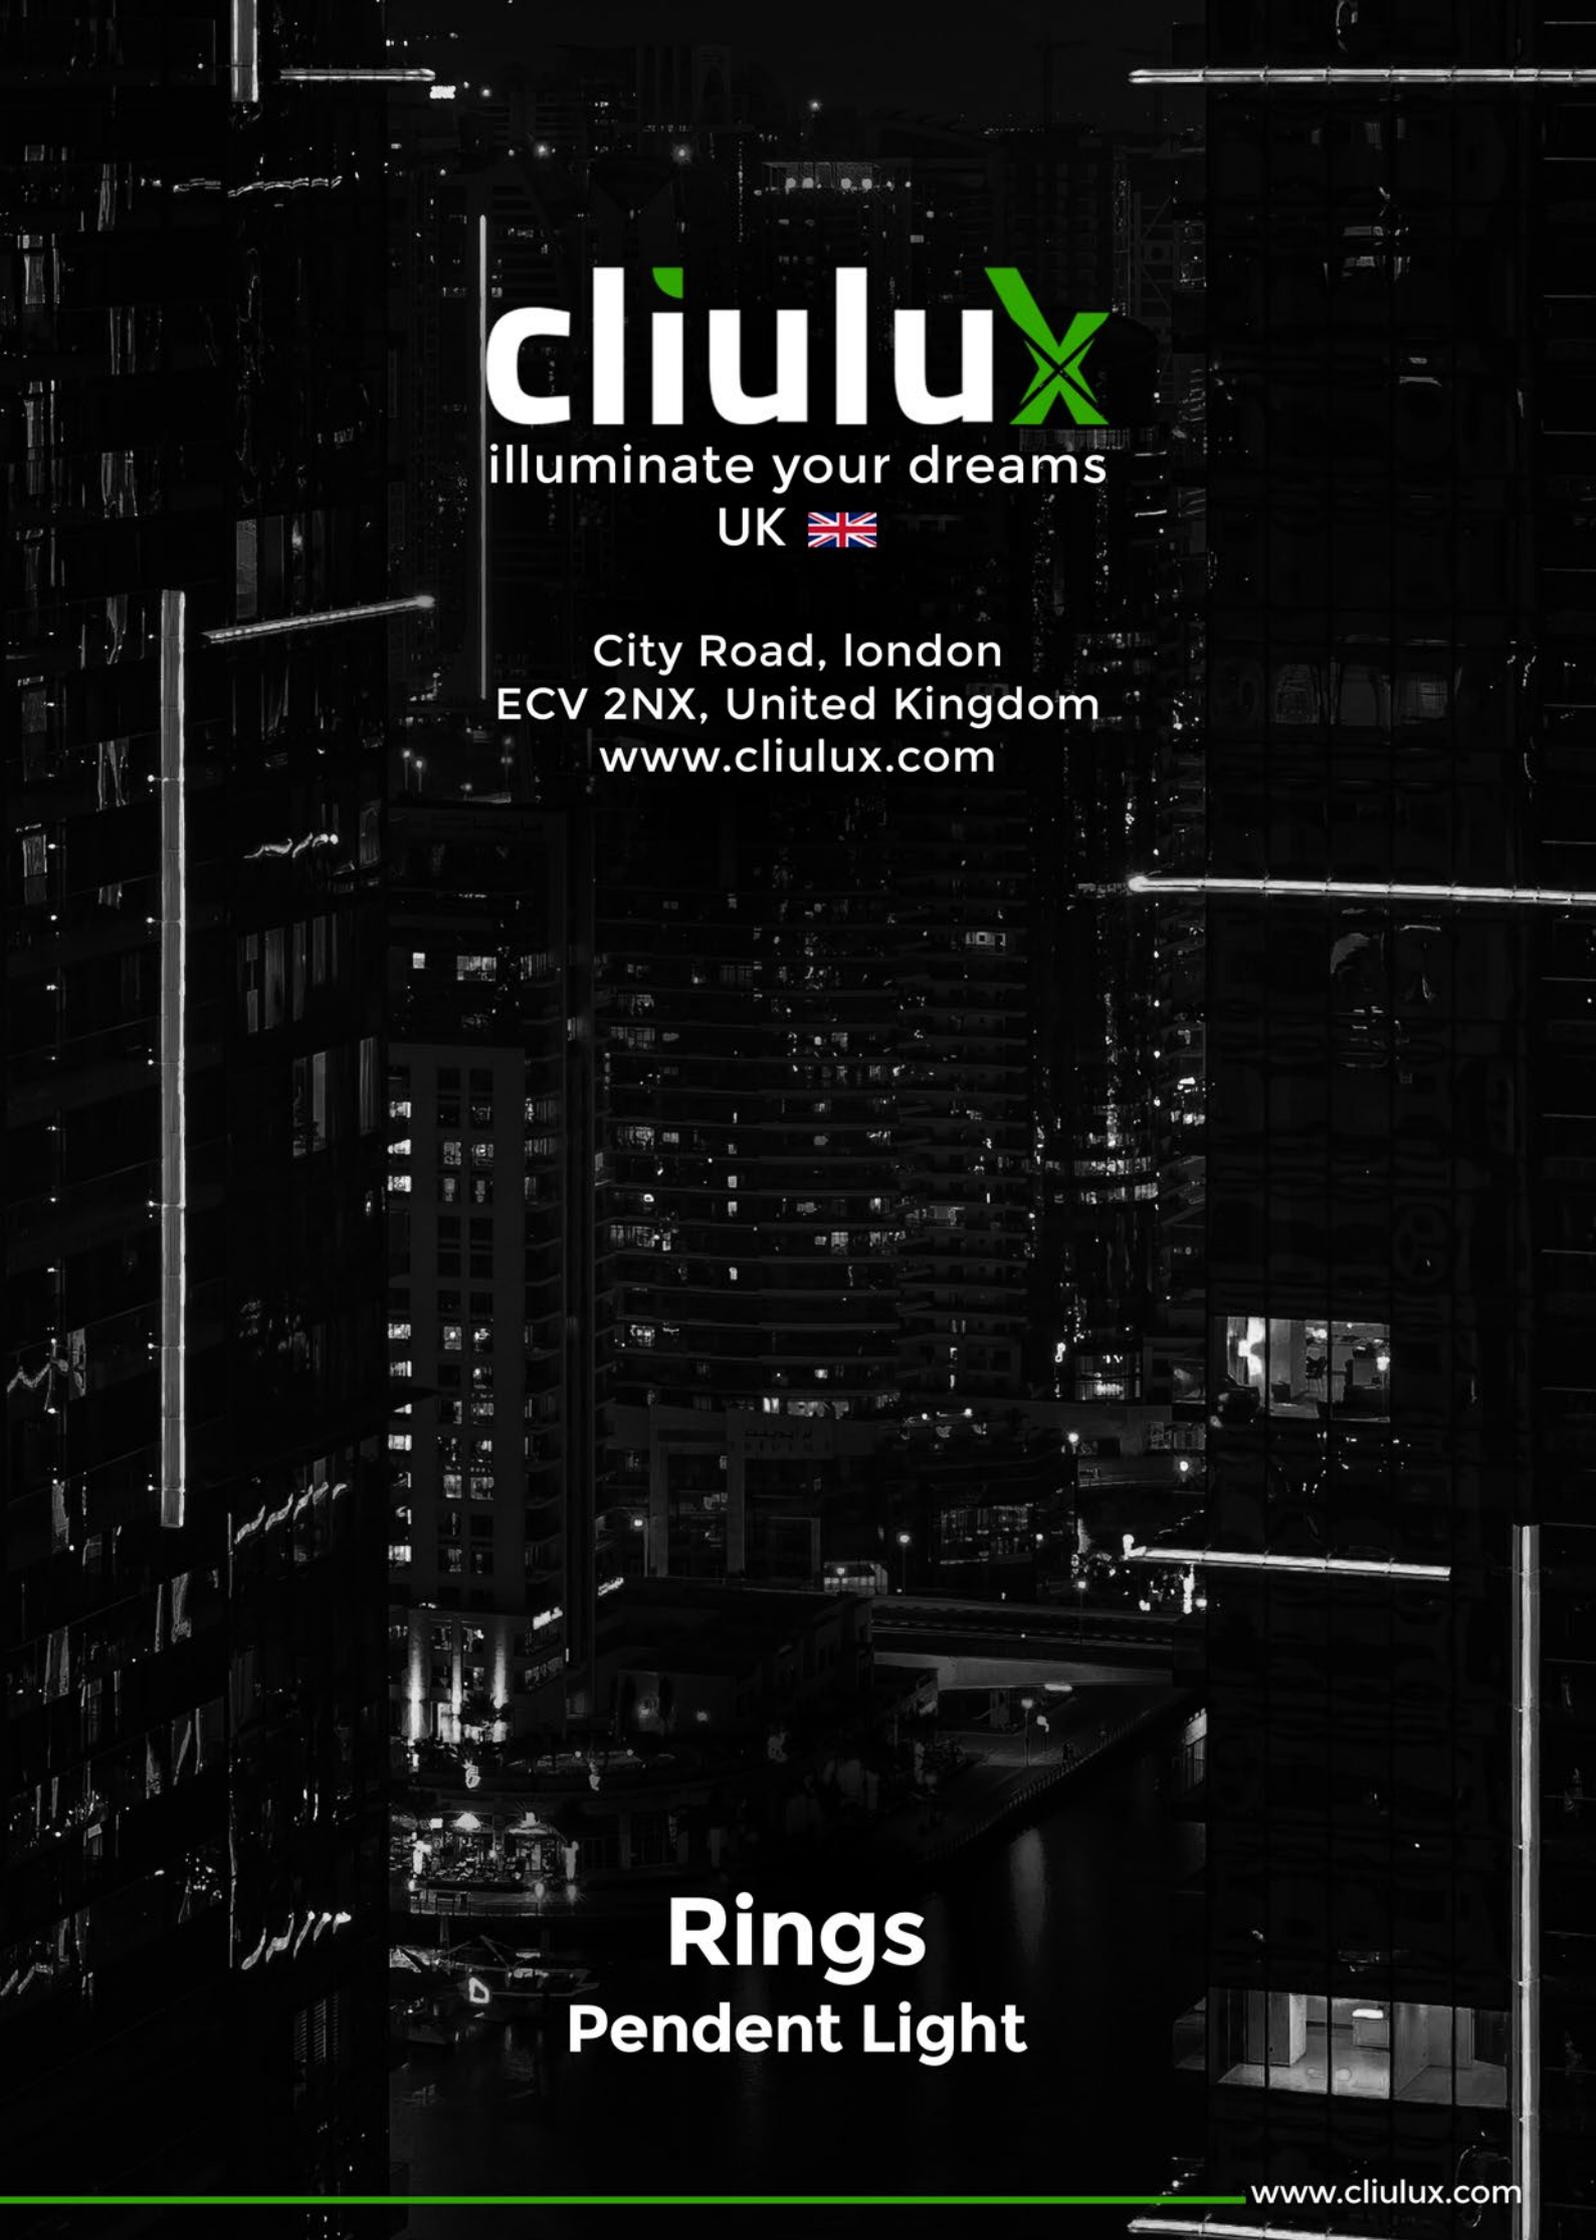

**cliulux**

illuminate your dreams

UK 

City Road, London  
ECV 2NX, United Kingdom  
[www.cliulux.com](http://www.cliulux.com)

**Rings**  
**Pendent Light**

[www.cliulux.com](http://www.cliulux.com)