

cliulux
illuminate your dreams
UK 

Slonce IP 66 Flood Light

IP66
Waterproof


150
LM/W


50000
HOURS

CRI
>70

5
YEAR
WARRANTY


Slonce

IP66 Flood Light



Product features

- Perfect structure designed die-cast aluminium with glass diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips or Bridgelux.
- Lumen efficacy 100 to 130lm/w, CRI >70
- Low energy consumption and up to >70% energy saving
- Highest Ingress Protection Rating

Classification

Class II	CCT
220 to 240VAC	2700K,4000K,6500K
50Hz / PF:>0.9	Driver : Meanwell




LED Light Engine

- Philips or Bridgelux LED Chips
- Lifespan : >50,000 + hrs
- Operating Temperature : -40°C~+50°C
- Working Environment : -40°C~+50°C, 20%-90% H.R
- Storage temperature: -40°C~+85°C, 10%-90% H.R
- No Toxic chemicals / RoHS Compliant
- 70%-80% Energy Saving Compared with HPS/MH


Electrical Characteristics

- Wide AC Input : 100-305 V
- Power Factor : ~0.95
- Total Harmonic Distortion : < 15%
- Surge Protection : IEC62471
- EMC test standard
- Meanwell ELG / Inventronics Drivers
- Easy&Simply Installation - plug and play
- Wall Mount / Ceiling Mount Bracket
- Adjustable Mount Angle
- Impact Grade: IK08

Dimension

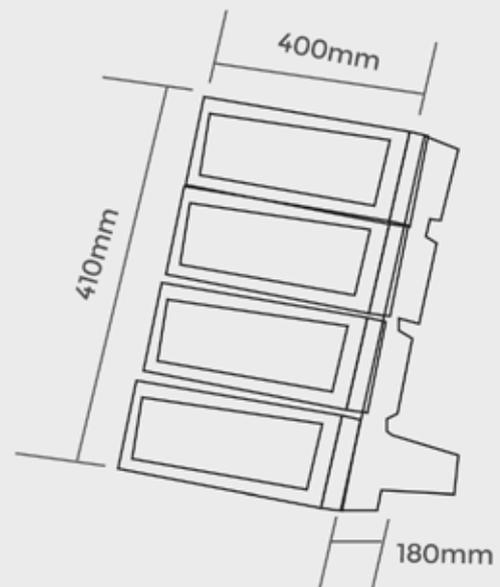

Model	Power	CCT	Luminous Efficiency	Beam Angle	Size
CLX-06 SC 400F100W	100W	2700K-6500K	150lm/w	60°, 90°, 120°	400 x 100 x 180mm
CLX-06 SC 400F200W	200W	2700K-6500K	150lm/w	60°, 90°, 120°	400 x 205 x 180mm
CLX-06 SC 400F300W	300W	2700K-6500K	150lm/w	60°, 90°, 120°	400 x 305 x 180mm
CLX-06 SC 400F400W	400W	2700K-6500K	150lm/w	60°, 90°, 120°	400 x 410 x 180mm
CLX-06 SC 400F500W	500W	2700K-6500K	150lm/w	60°, 90°, 120°	400 x 515 x 180mm
CLX-06 SC 400F600W	600W	2700K-6500K	150lm/w	60°, 90°, 120°	400 x 620 x 180mm

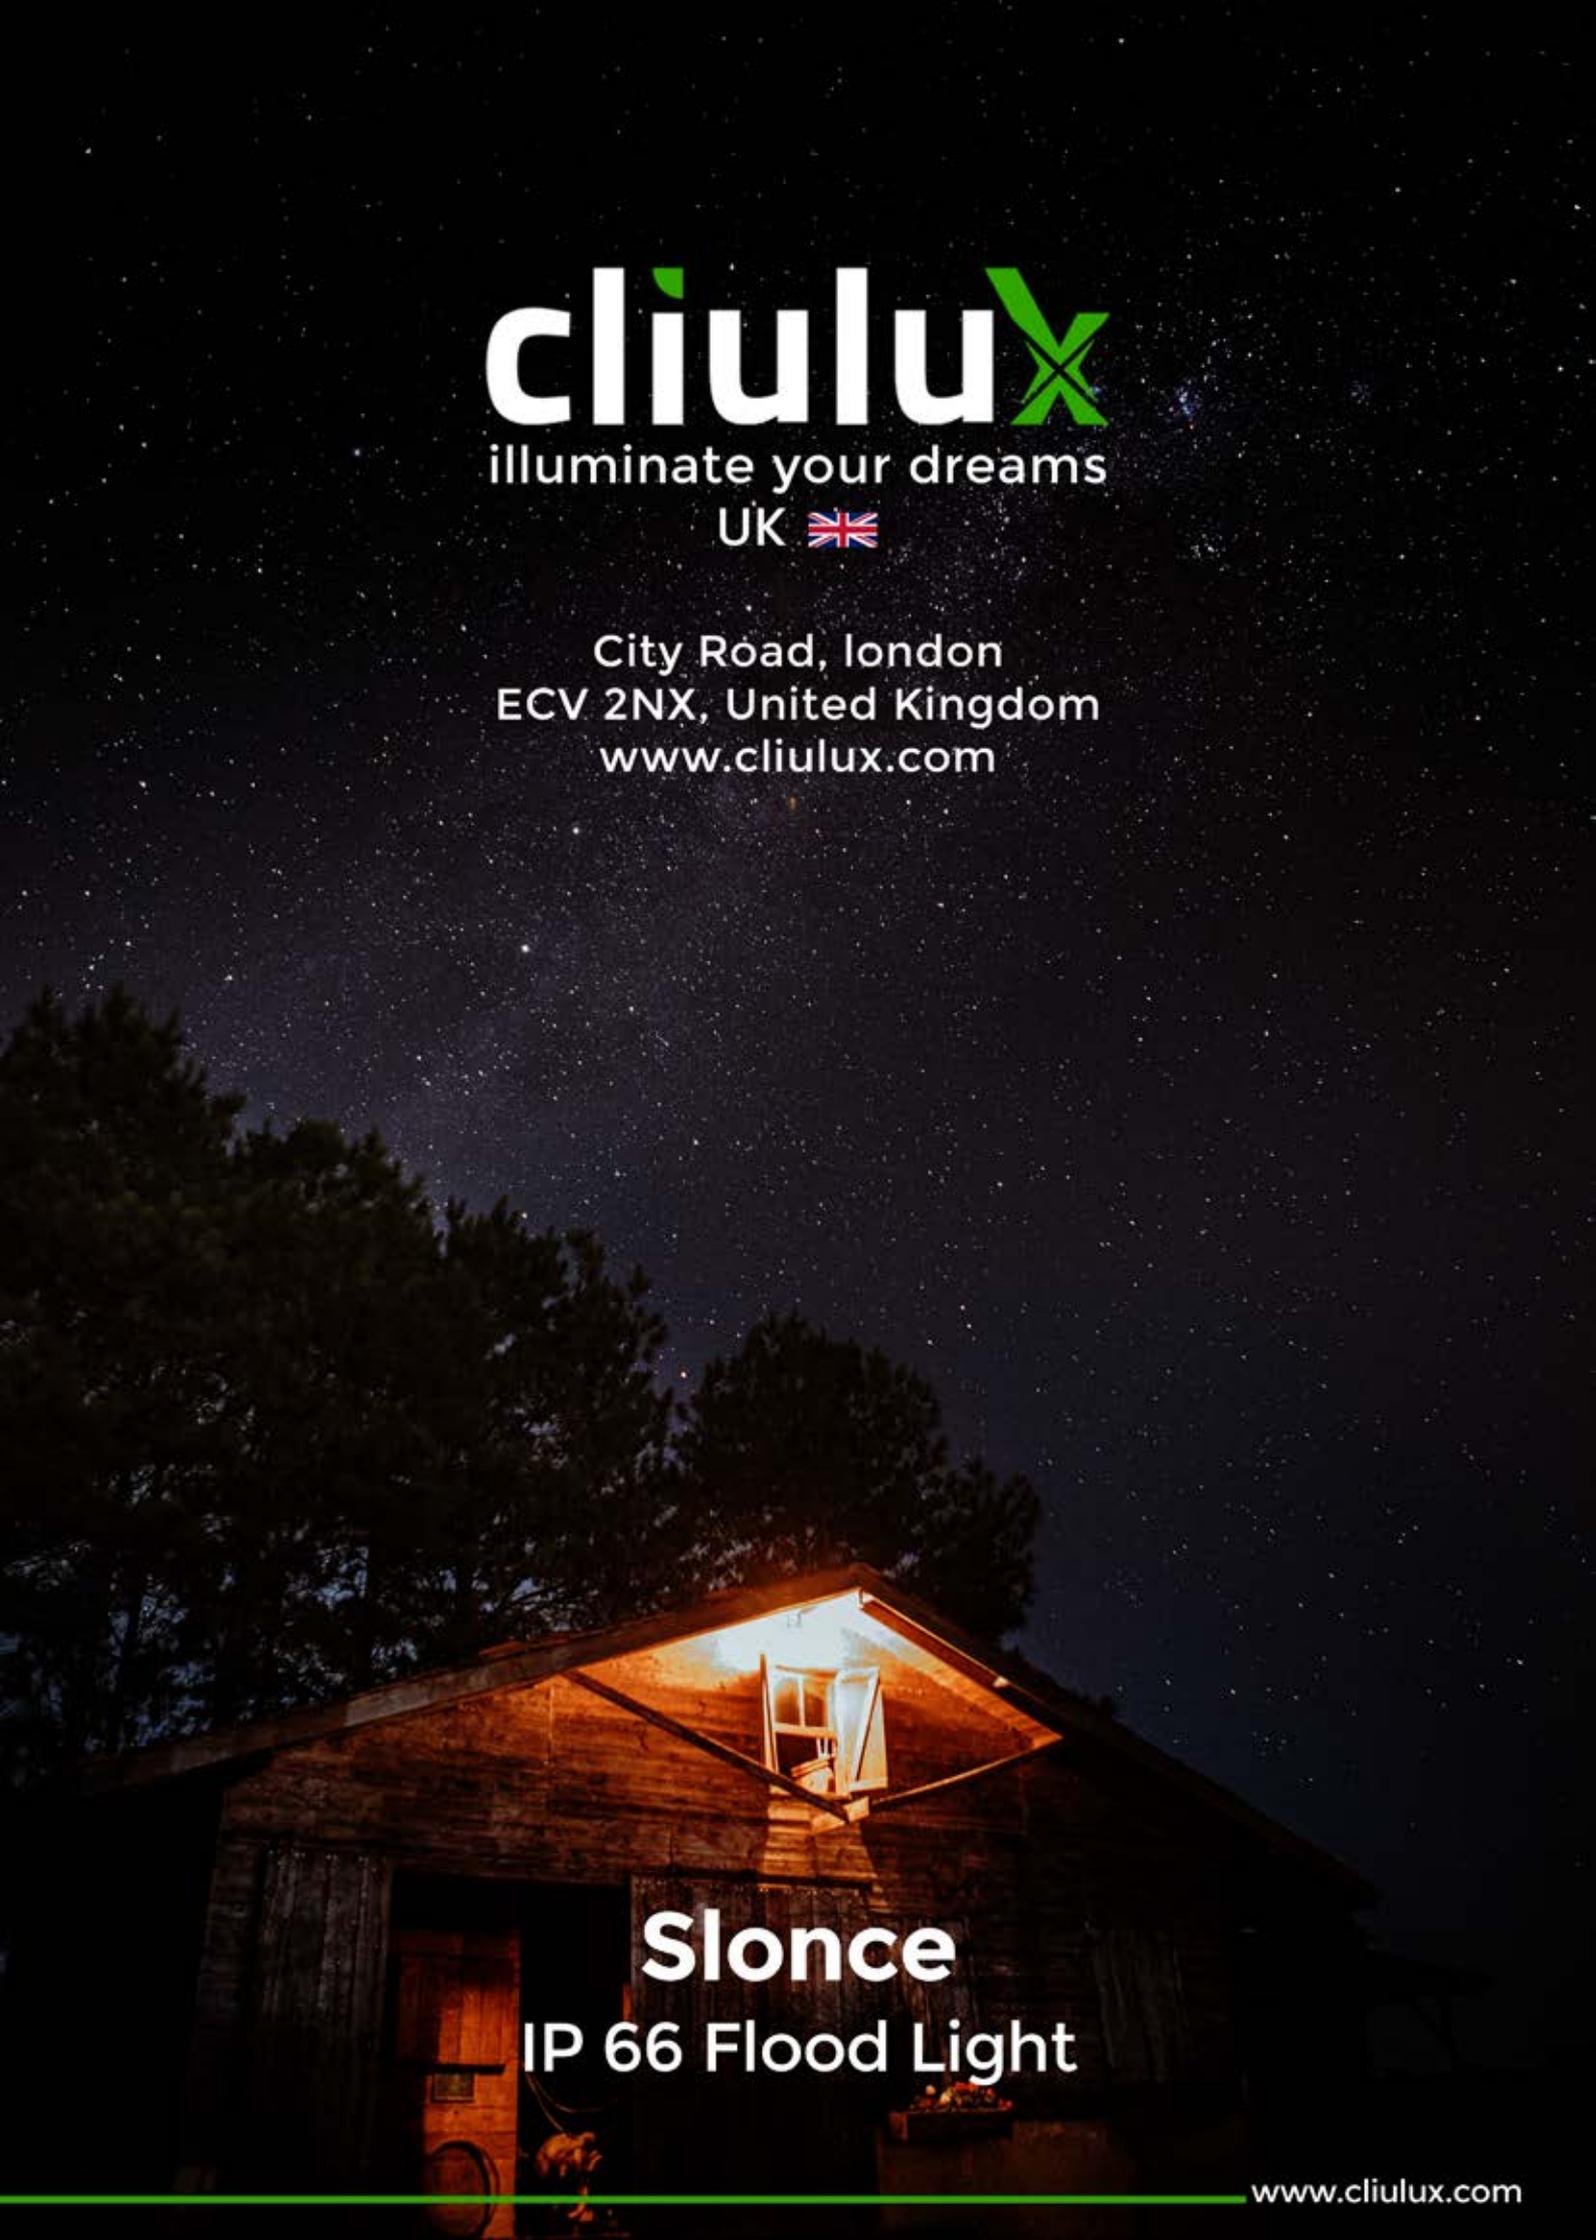

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Slonce
IP 66 Flood Light

www.cliulux.com