

# Snow Garden Bollards



# Snow GB 1



12GB1R70F



09GB1R60F



09GB1R0C




## Product features

- Perfect structure designed die-cast aluminium
- High Performance reflector with PC Diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud & Menwell

## Dimension

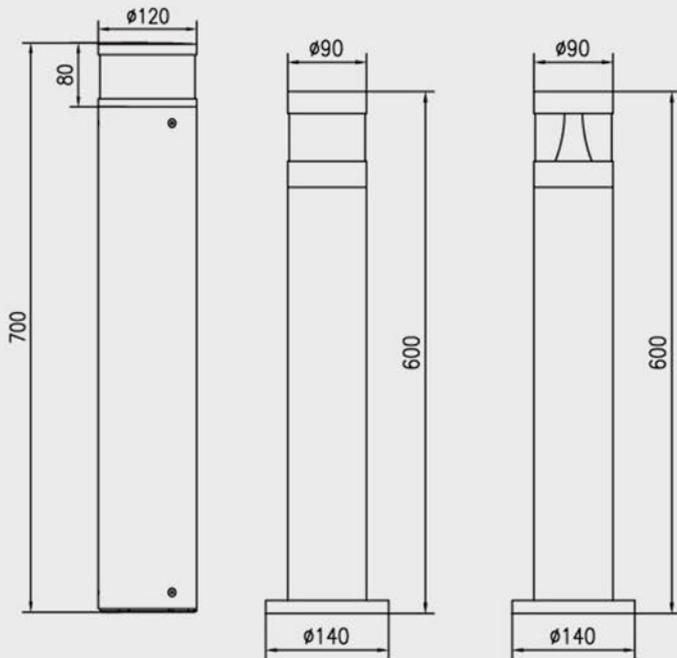

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 12GB1R70F12W	12W	3000 - 6000K	1000	4810	Ø120 x H700mm
CLX-12SN 09GB1R60F10W	10W	3000 - 6000K	800	4811	Ø90 x H600mm
CLX-12SN 09GB1R0C10W	10W	3000 - 6000K	800	4812	Ø90 x H600mm

# Snow GB 2



## Product features

- Perfect structure designed die-cast aluminium with PC diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud & Menwell

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 15GB2R60F10W	10W	3000 - 6000K	800	4813	Ø150 x H600mm
CLX-12SN 30GB2R65F15W	15W	3000 - 6000K	1300	4814	Ø300 x H650mm

# Snow GB 3



15GB3R80C



18GBR60C



18GB3R80C




## Product features

- Perfect structure designed die-cast aluminium with PC diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification


<b>Class II</b>	<b>CCT</b>
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	<b>Driver</b>
	Lifud IP 67

## Dimension

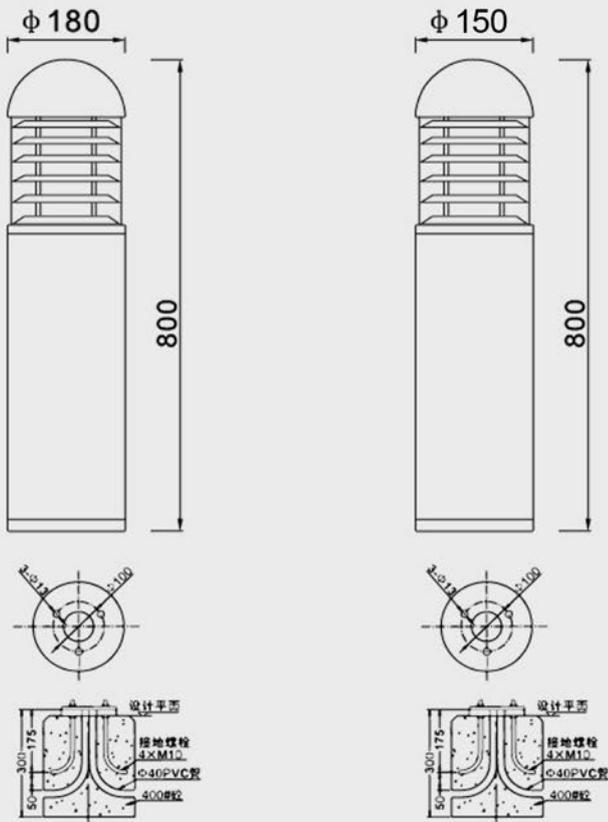

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 15GB3R80C12W	12W	3000 - 6000K	1000	4815	$\phi 150$ x H800mm
CLX-12SN 18GB3R80C12W	18W	3000 - 6000K	1500	4816	$\phi 180$ x H800mm
CLX-12SN 18GBR60GE27	E27-15W	3000 - 6000K	1200	4817	$\phi 180$ x H800mm

# Snow GB 4

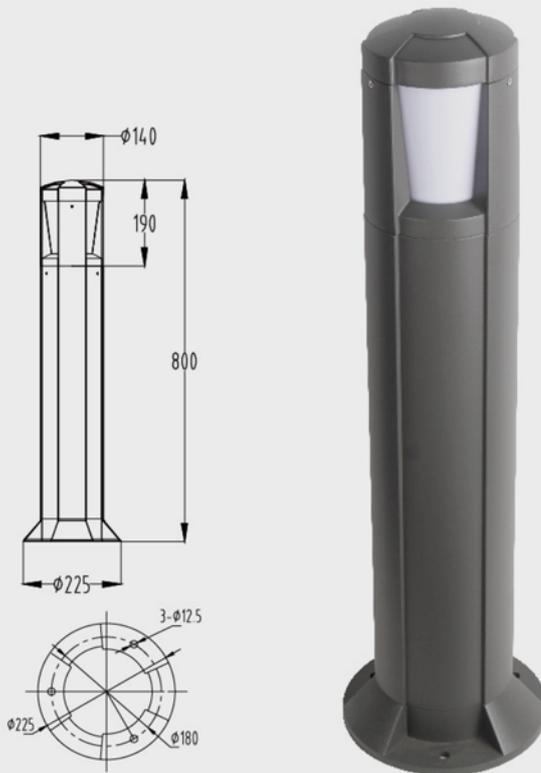

## Product features


- Perfect structure designed die-cast aluminium Fitting with PC diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 14GB4R80F12W	12W	3000 - 6000K	1000	4818	Ø140 x H800mm

# Snow GB 5

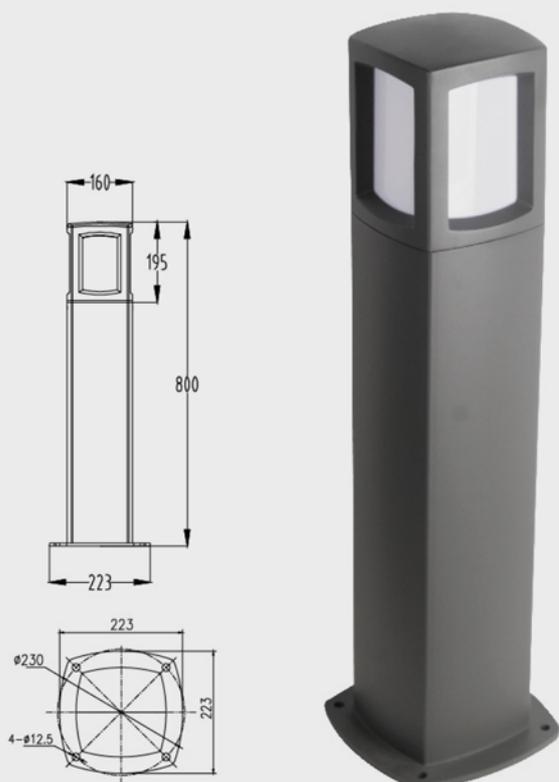

## Product features

- Perfect structure designed die-cast aluminium with PC diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

<b>Class II</b>	<b>CCT</b>
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	<b>Driver</b>
	Lifud

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 16GB5S80F12W	12W	3000 - 6000K	1000	4819	Ø160 x H800mm

# Snow

## GB 6&7



## Product features

- Perfect structure designed die-cast aluminium with PC diffuser
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving


## Classification

<b>Class II</b>	<b>CCT</b>
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	<b>Driver</b>
	Lifud

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 18GB6R70F12W	12W	3000 - 6000K	1000	4820	D180 x H700
CLX-12SN 18GBR718F12W	12W	3000 - 6000K	1000	4821	D180 x H185

# Snow

## GB 8



## Product features

- Perfect structure designed die-cast aluminium Glass diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud

MODEL	Wattage	CCT	Lumens	Lumens	Size
CLX-12SN 18GBR718F12W	12W	3000 - 6000K	1000	4822	Ø180 X H185mm

# Snow

## GB 9



## Product features

- Perfect structure designed die-cast aluminium Fitting
- High Performance PC Diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Osram, Epistar etc.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving


## Classification

<b>Class II</b>	<b>CCT</b>
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	<b>Driver</b>
	Lifud

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 70GB9S100F24W	24W	3000 - 6000K	2000	4823	Ø70 x H1000mm

# Snow

## GB 10

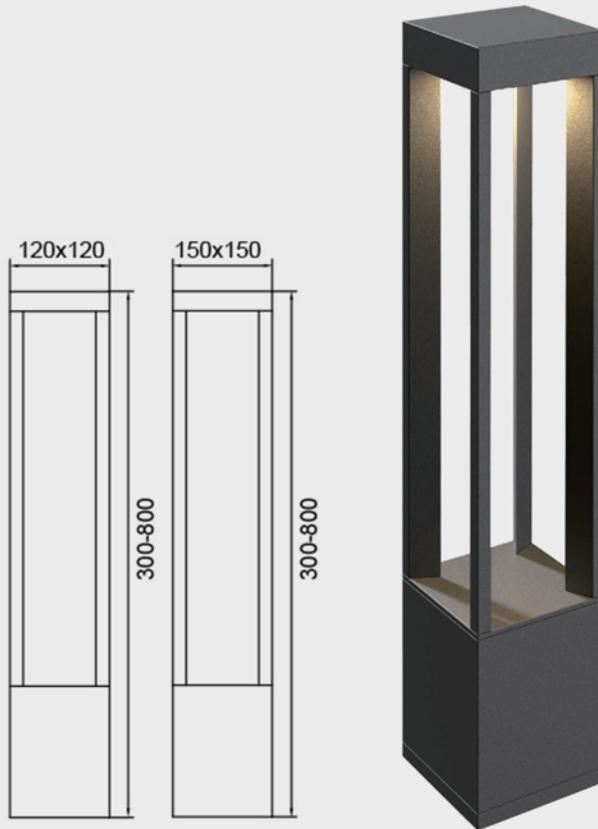

## Product features

- Perfect structure designed die-cast aluminium
- High Performance reflector with Glass Diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Cree
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

<b>Class II</b>	<b>CCT</b>
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	<b>Driver</b>
	Lifud

MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 120GB10 S80F15W	15W	3000 - 6000K	1300	4824	Ø120 x H800mm

# Frost Bollard



## Product features

- Perfect structure designed die-cast aluminium with PC diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Cree
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving

## Classification

<b>Class II</b>	<b>CCT</b>
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	<b>Driver</b>
	Lifud


MODEL	Wattage	CCT	Lumens	RF No	Size
CLX-12SN 25FTWC18W	18W	3000 - 6000K	1500	4825	Ø250 x H618mm

# cliulux

illuminate your dreams

UK 

City Road, london  
ECV 2NX, United Kingdom  
[www.cliulux.com](http://www.cliulux.com)

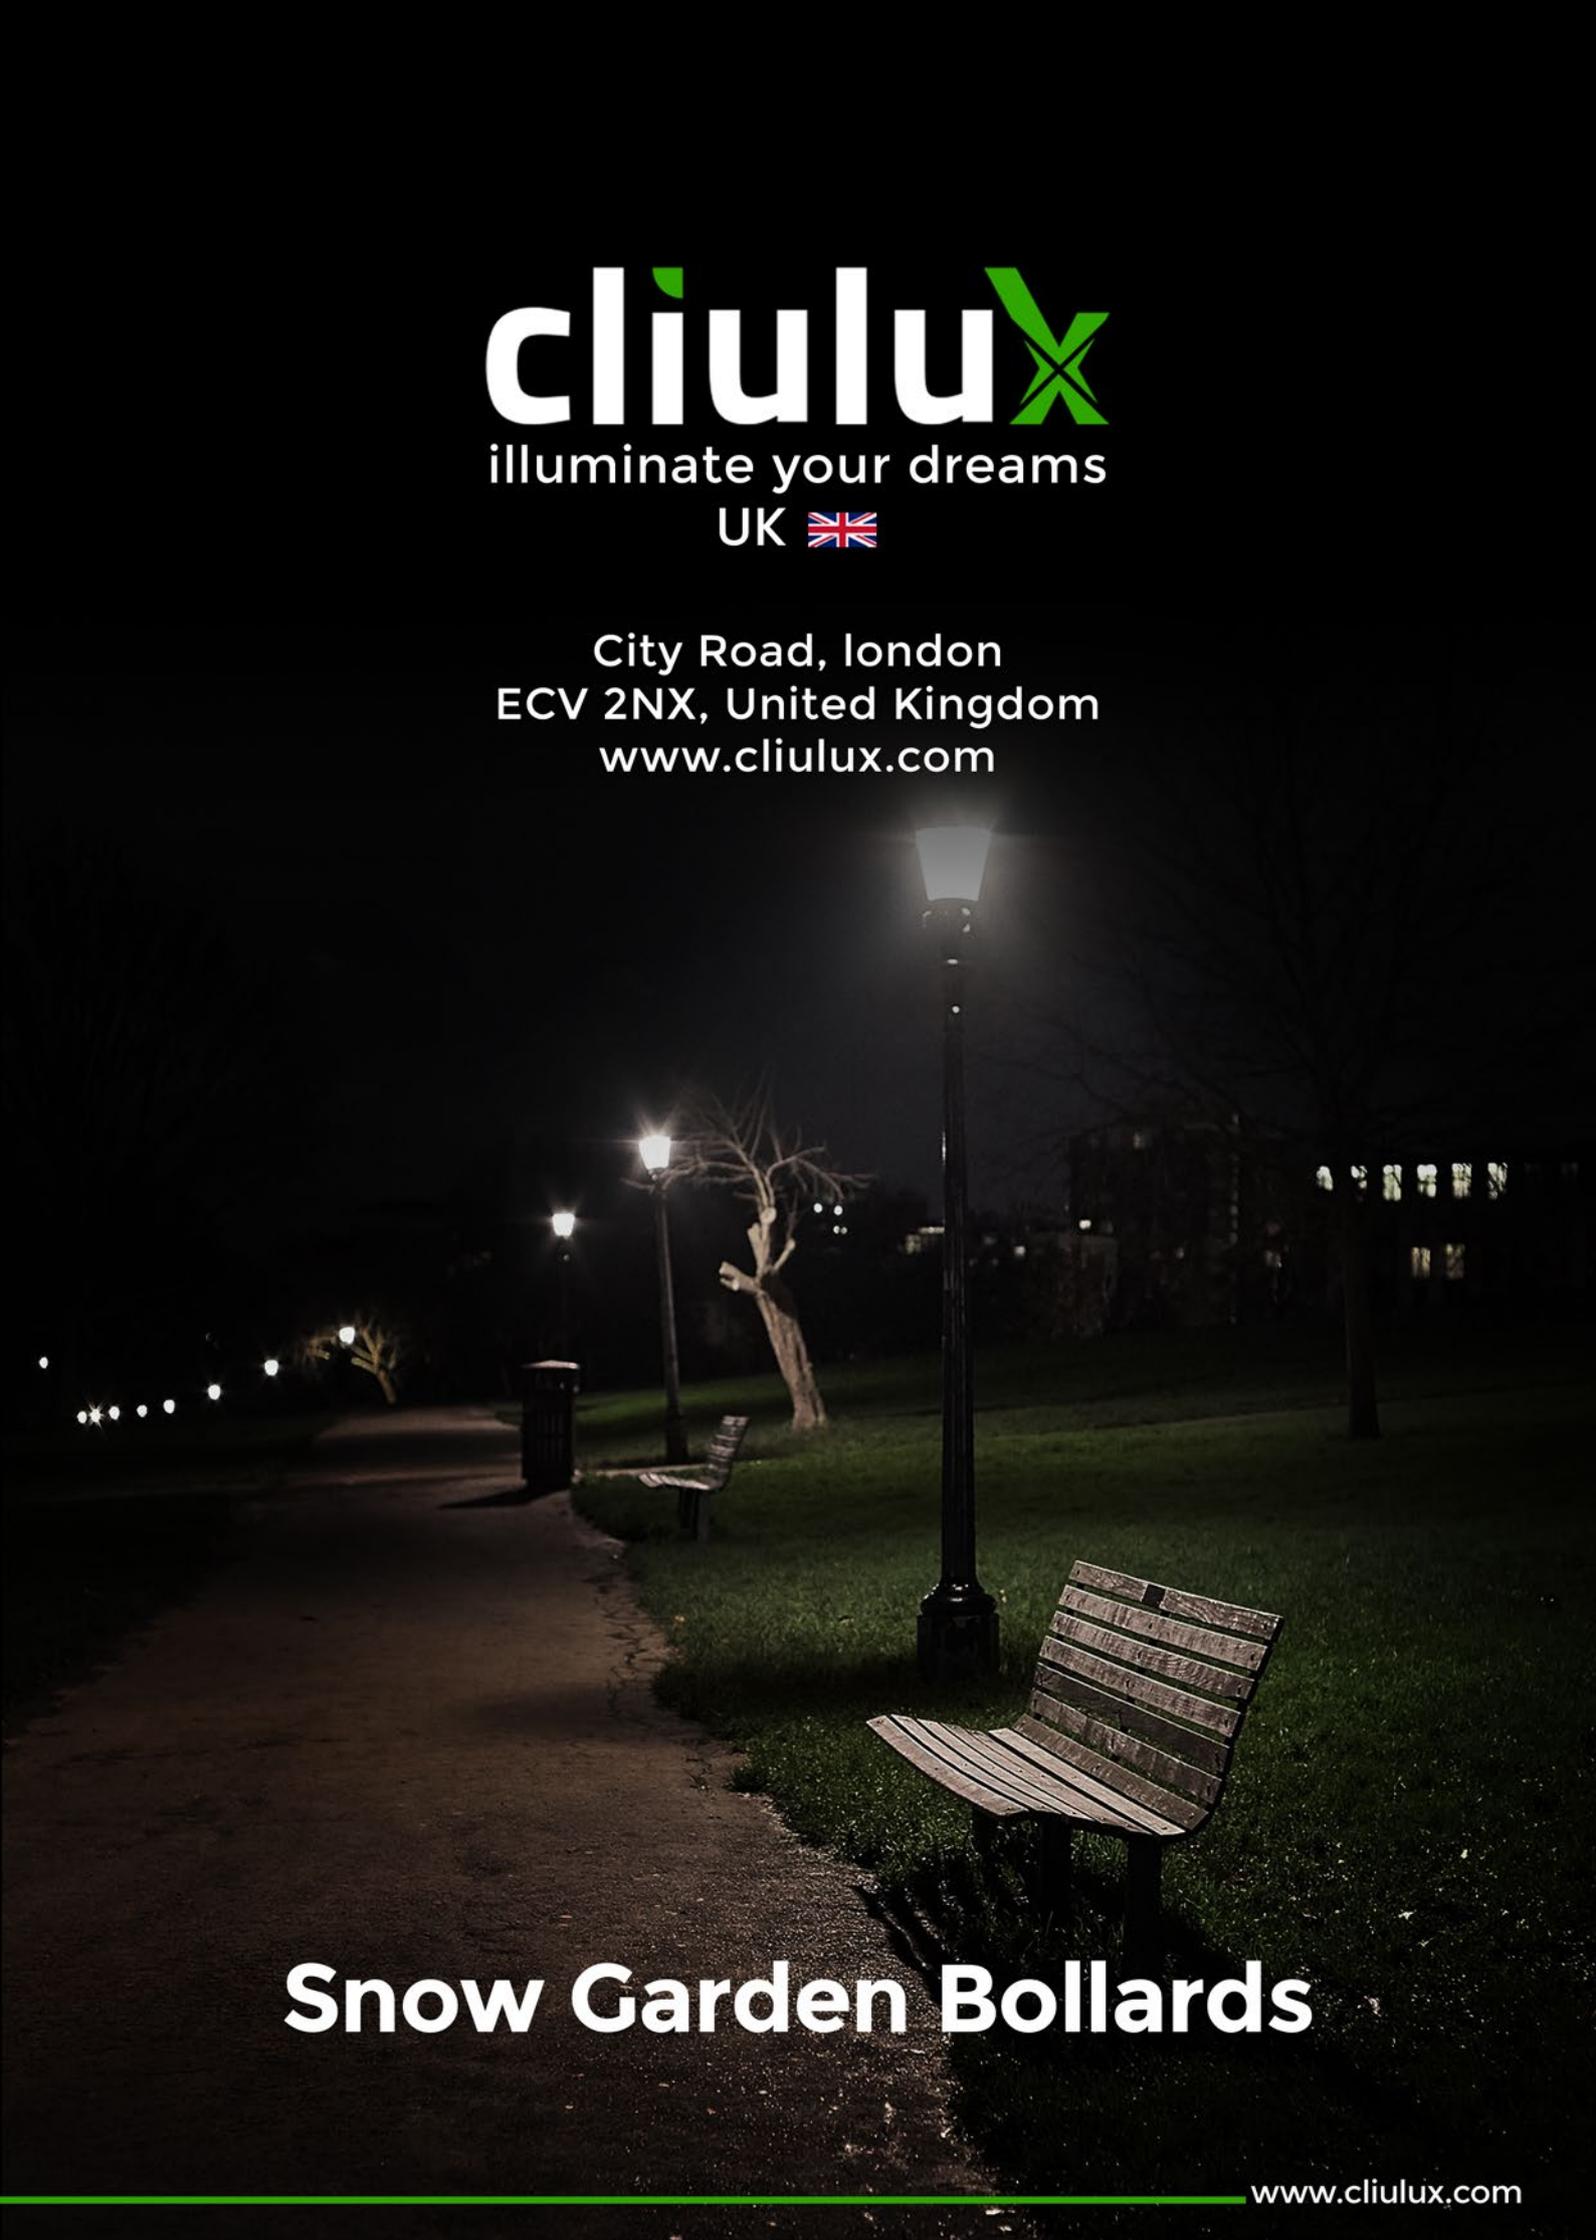

**Snow Garden Bollards**

[www.cliulux.com](http://www.cliulux.com)