

Tro-X

LED Low Bay Light



**CCT & Power
Selectable**



Product features

- 70% energy saving, short ROI period
- Up to 50, 000hrs @ LM80, low maintenance cost
- Versatile in mounting with wall mounted, loop hanging, steel chain hanging
- RoHS compliant, environmental friendly, no mercury or lead, 100% recyclable
- Luminaire efficacy : up to 140 lm/w
- Beam angle: 90°
- Available with Motion /PIR Sensor

Specification Sheet

Optical Specs

Lumen Efficacy	140 Lm/W
CCT	(3000K or 4000K) (4000K or 5000K) (Switchable)
CRI	>80 (90 optional)


Electrical Specs

Power	25W, 40W, 60W, 80W
Input Voltage	AC 120~277 Volts
Power Frequency	50/60 Hz
Power Factor	>0.95
Total Harmonic Distortion	<10%
Insulation Grade	Class I



Other Details

Lifespan	≥50,000 Hours
Operating Temperature	-30°C~50°C
LED Driver Spec	Lifud Dimmable Driver
LED Spec	SMD 2835
Dimming	DALI, 0~10V

Light Distribution Curve

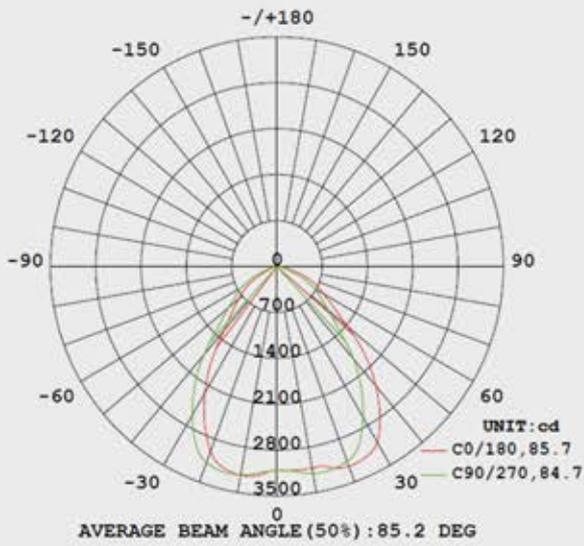

Dimensions (mm)

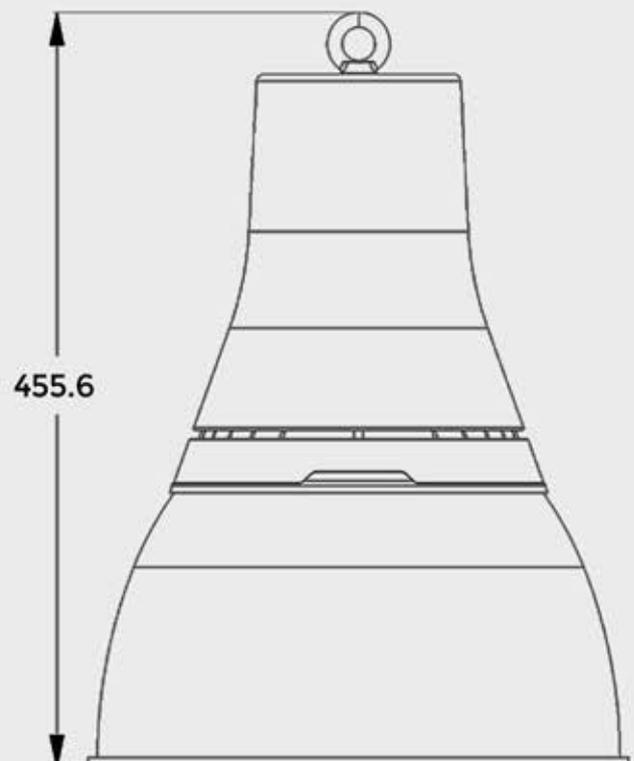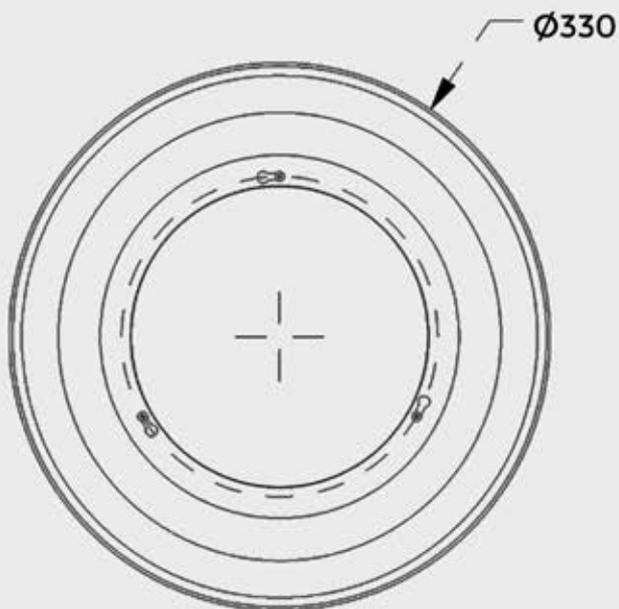

Details



Two Options

- CCT & Power Selectable
- Polycarbonate or ALuminium reflector is available

cliulux

illuminate your dreams

UK 

City Road, london
ECV 2NX, United Kingdom
www.cliulux.com



Tro-X

LED Low Bay Light