

Novli 3-Phase Track Light



Novli

3-Phase Track Light





Product features

- Optimised for efficient and high-output accent lighting in retail and automotive applications as well as architectural lighting
- 3-phase LED spotlight with converter integrated in universal adapter
- Spotlight rotatable through 360°, 337° and pivotable through 90°
- Control: switchable, dimmable **Dali** only as well as wireless connection via app with Bluetooth® 4.x - basicDim Wireless as variant
- High quality ADC12 die cast aluminum lamp body, efficient heat dissipation structure design, effectively ensure life.
- Surface spray sand treatment, strong texture, anti-corrosion, anti-oxidation.
- High quality COB chip, high light efficiency, clear sight without glint.
- Optional Analog, 0/1-10V, DALI, Dimming


Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	


Luminous Intensity Distribution Curve

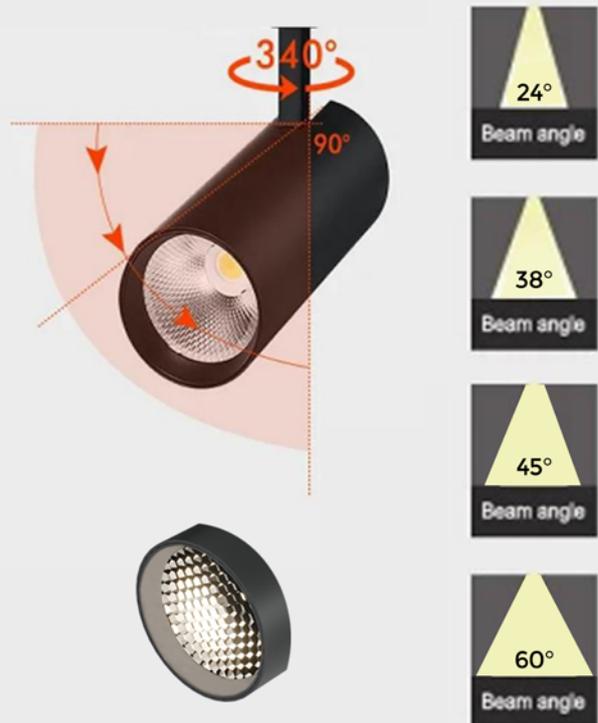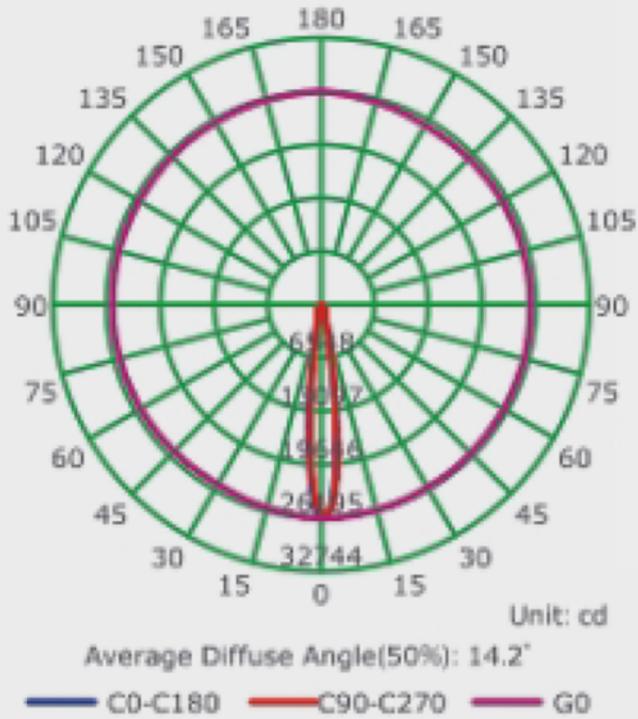

Illuminance at a Distance

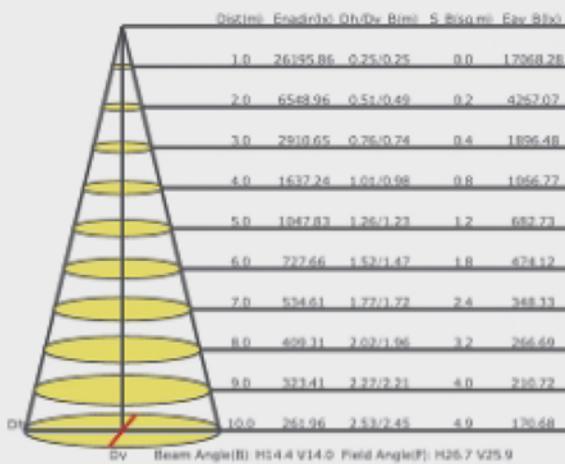

Dimension

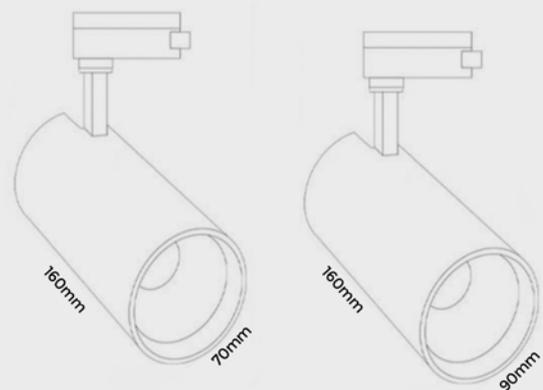

Model	Power	CCT	Luminous Efficiency	Beam Angle	RF No	Size
CLX-17NL070145TR0420W	20W	3000K-6500K	100lm/w	24° 38° 45° 60°	5151	Ø70 x H145mm
CLX-17 NL070160TR0430W	30W	3000K-6500K	100lm/w	24° 38° 45° 60°	5152	Ø70 x H160mm
CLX-17 NL090160TR0442W	42W	3000K-6500K	100lm/w	24° 38° 45° 60°	5153	Ø90 x H160mm

3M 3Circuit Track

3-Circuit Track System



Colours



Options

Dimmable Dimmable




- Product code Black (RAL 9011)
Ean Code Black
- Product code White (RAL 9010)
Ean Code White
- Product code Grey (RAL 7040)
Ean Code Grey
- Main Materials
- Net weight per piece
- Inner Box/Outer Box
- Rated Voltage per Circuit


Mechanical Load Diagram




Dimensions

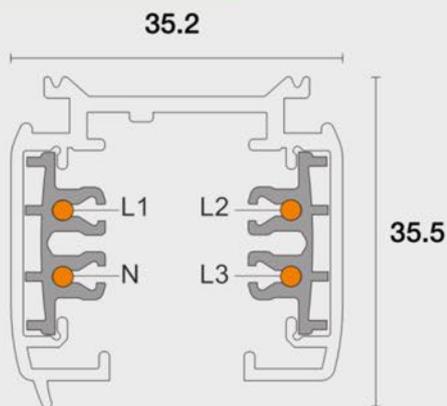

Connecting Diagram

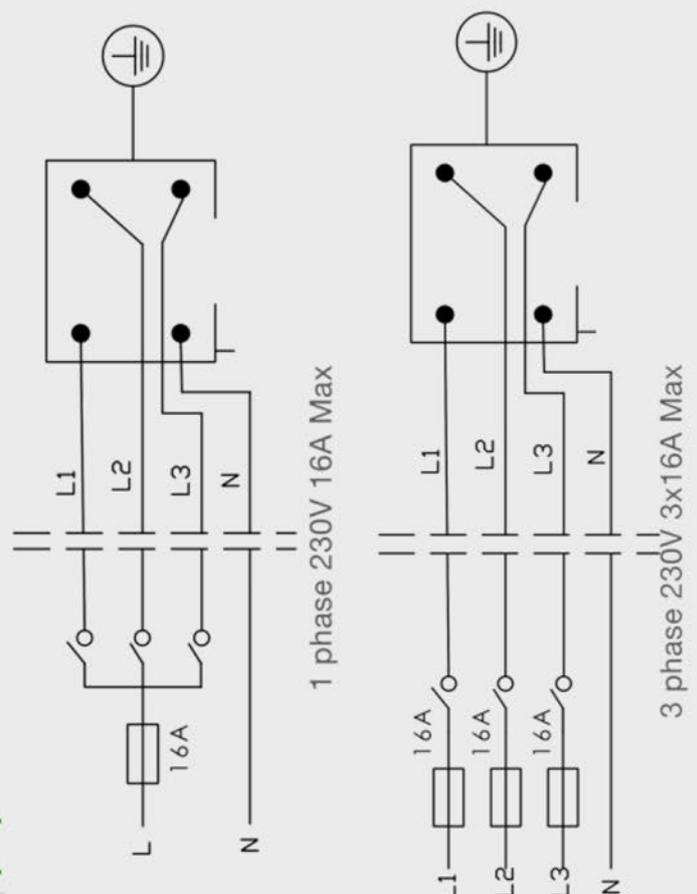

Model	Colour	Size
CLX-0430-B 8719747930144	Black	1000 mm
CLX-0430-W 8719747930137	White	2000 mm
CLX-0430-S 8719747930137	Silver	3000 mm

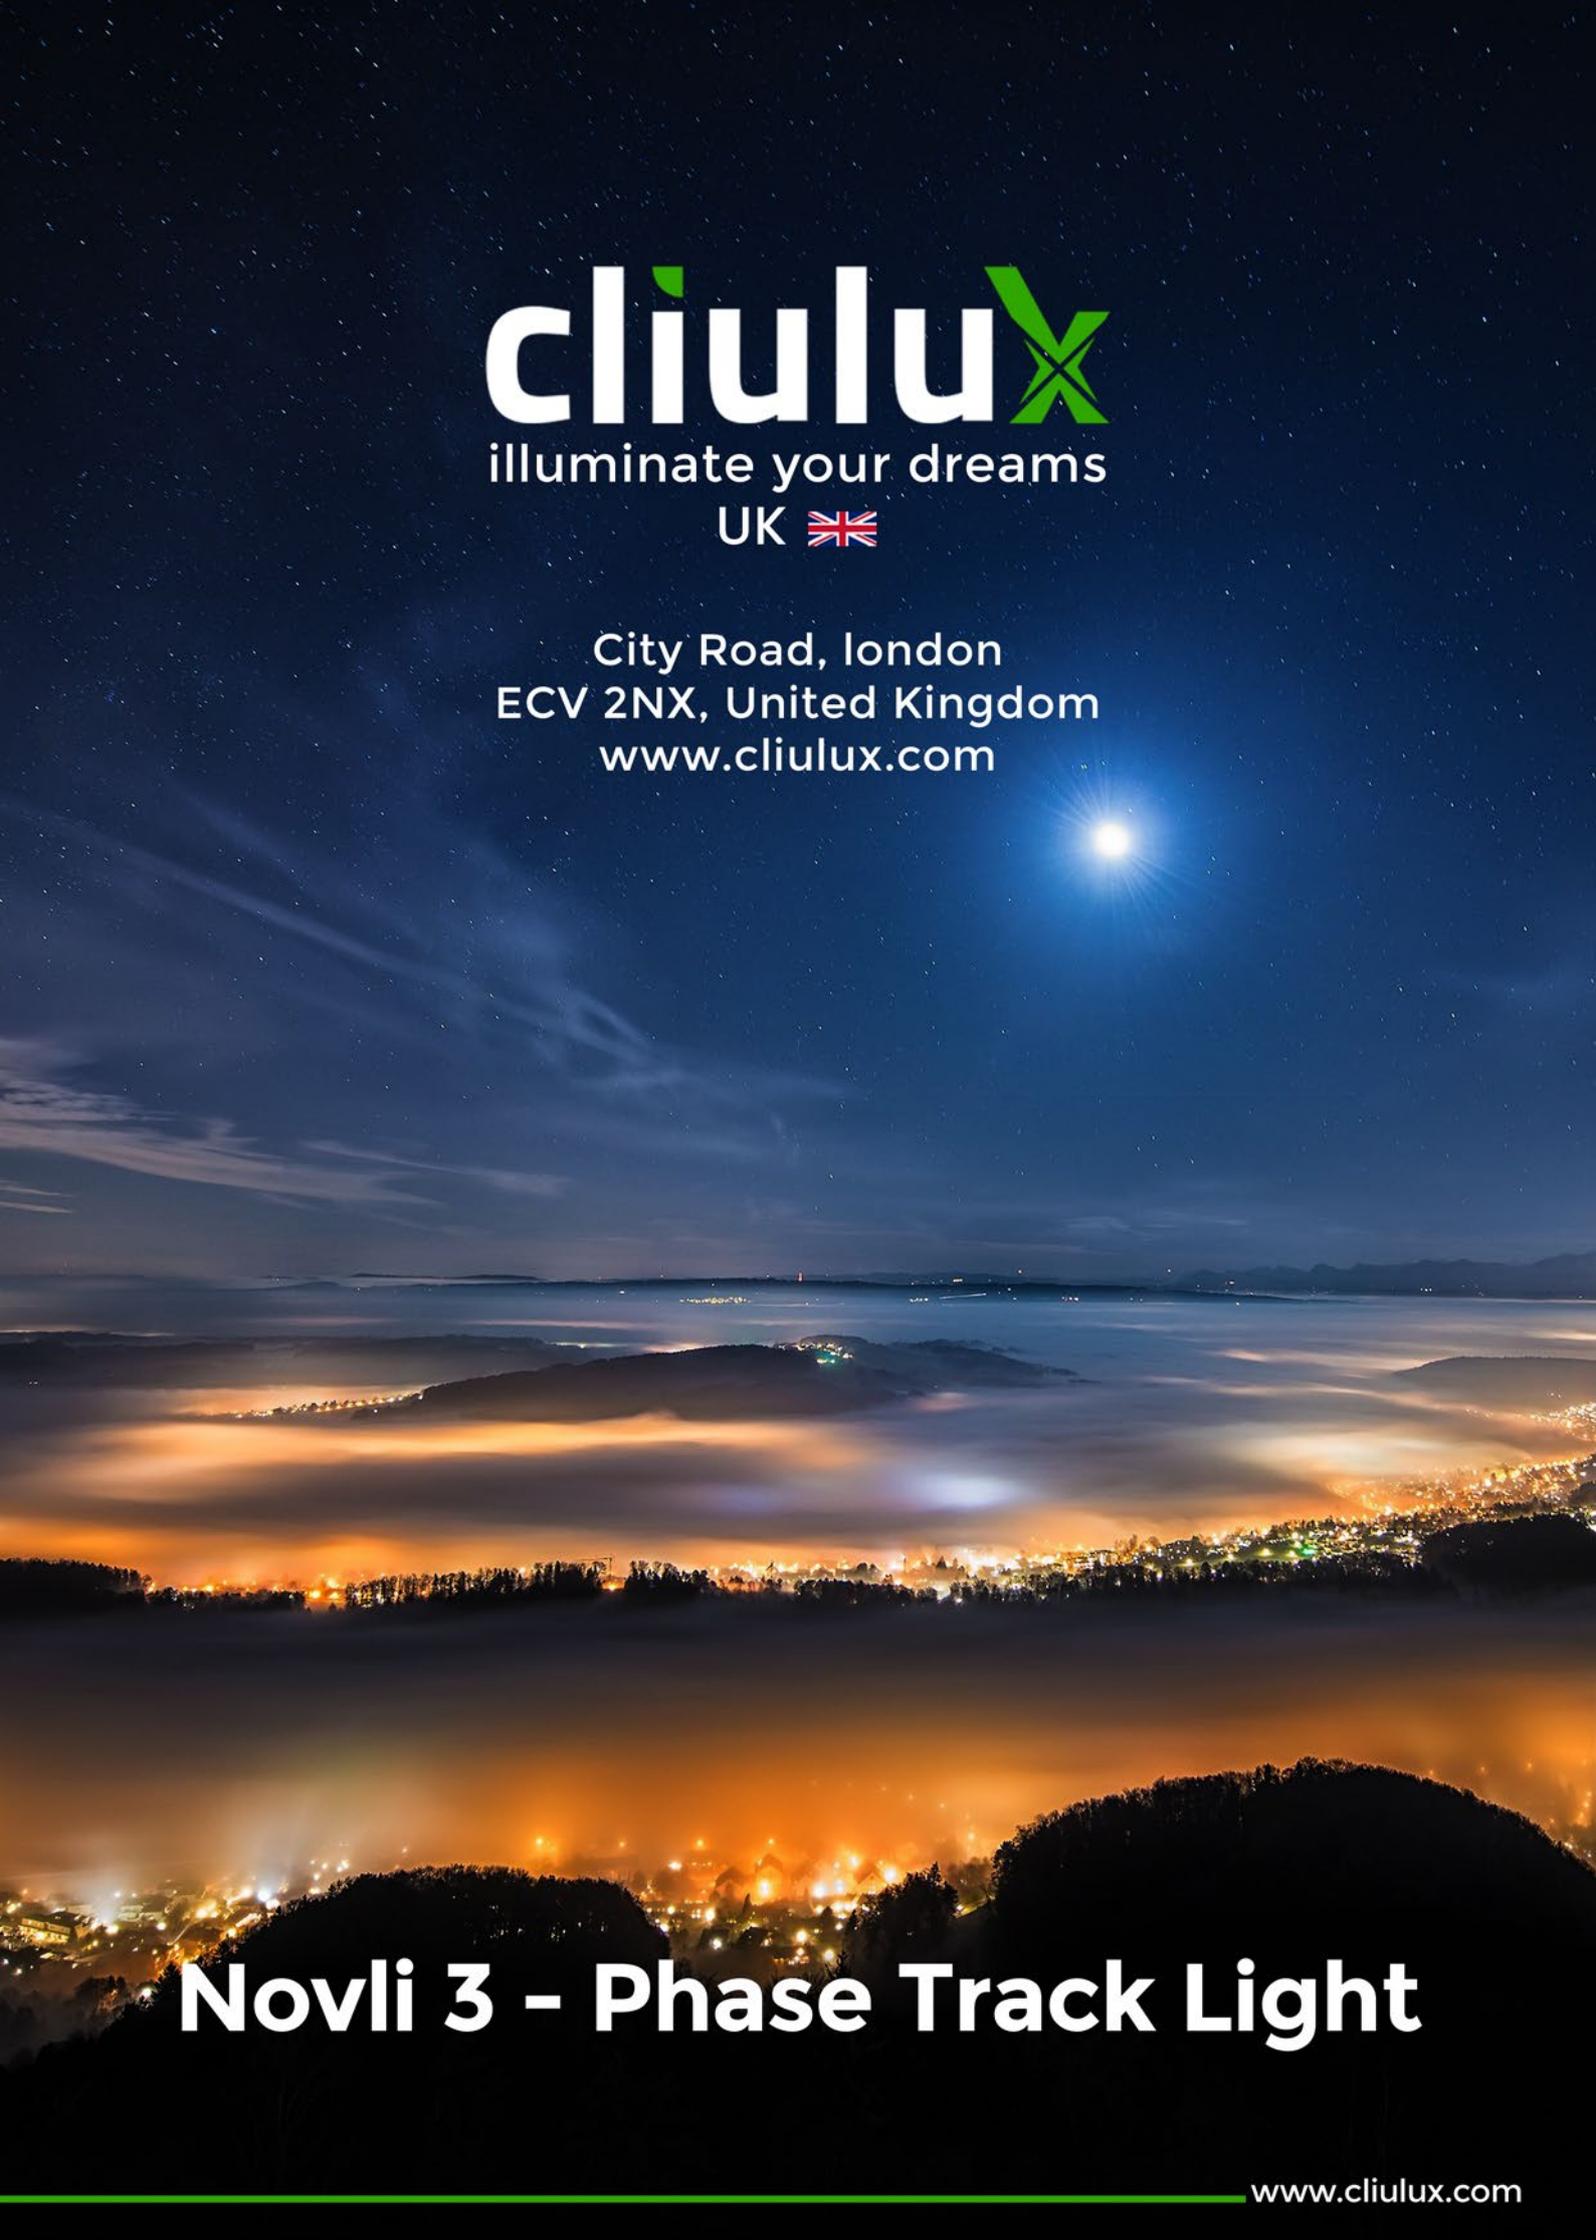

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Novli 3 - Phase Track Light