


# Pilduo 3-Phase Track Light



# Pilduo

## 3-Phase Track Light

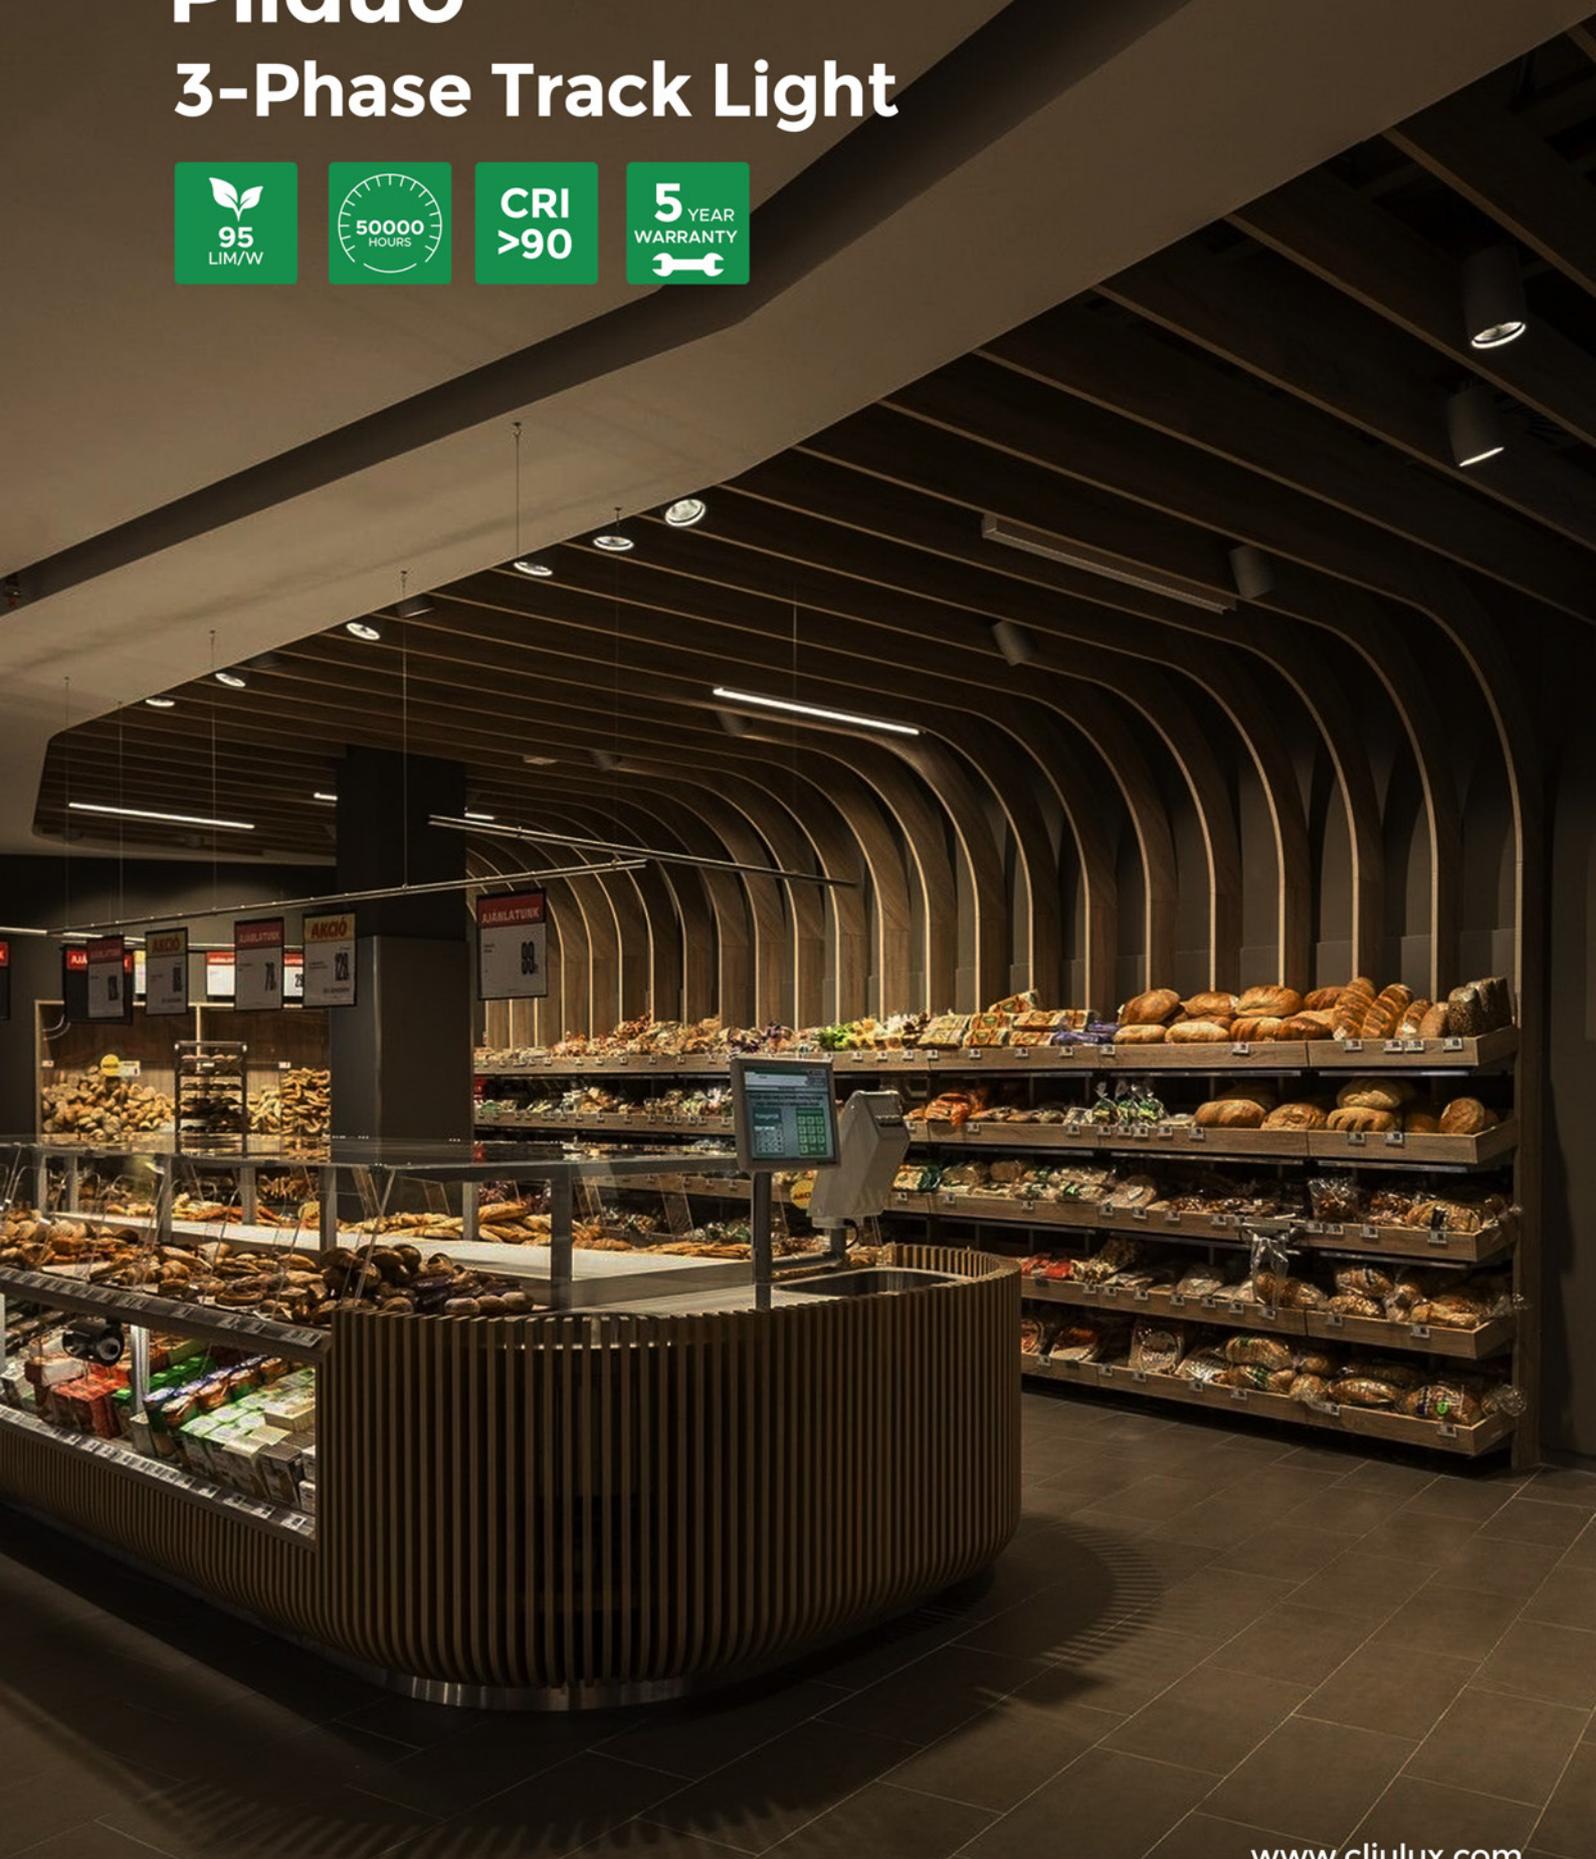



## Product features

- Optimised for efficient and high-output accent lighting in retail and automotive applications as well as architectural lighting
- 3-phase LED spotlight with converter integrated in universal adapter
- Spotlight rotatable through 360°, 337° and pivotable through 90°
- Control: switchable, dimmable **Dali** only as well as wireless connection via app with Bluetooth® 4.x - basicDim Wireless as variant
- High quality ADC12 die cast aluminum lamp body, efficient heat dissipation structure design, effectively ensure life.
- Surface spray sand treatment, strong texture, anti-corrosion, anti-oxidation.
- High quality COB chip, high light efficiency, clear sight without glint.


## Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	


## Luminous Intensity Distribution Curve

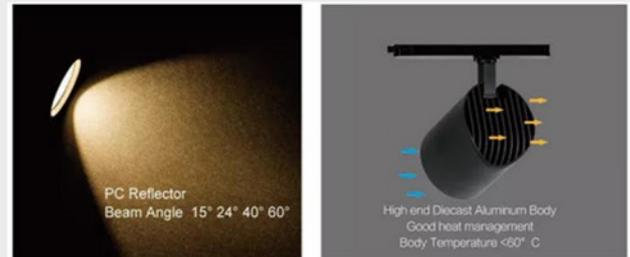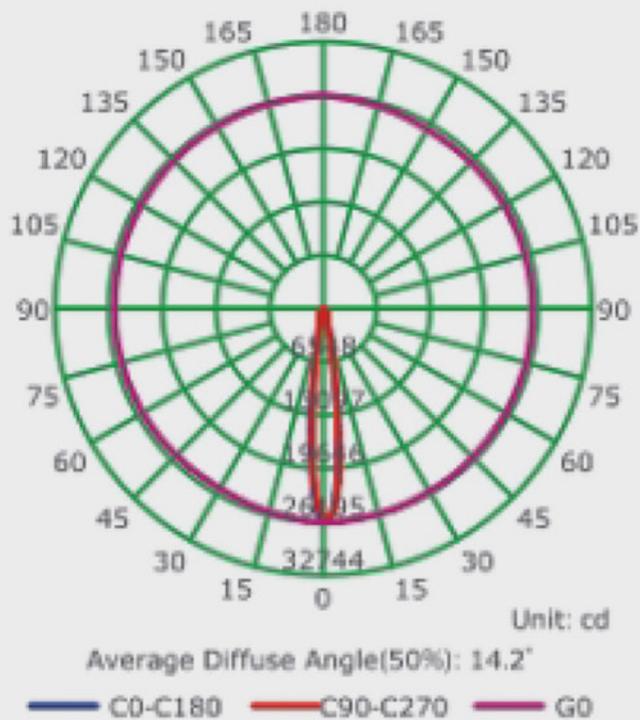

## Illuminance at a Distance

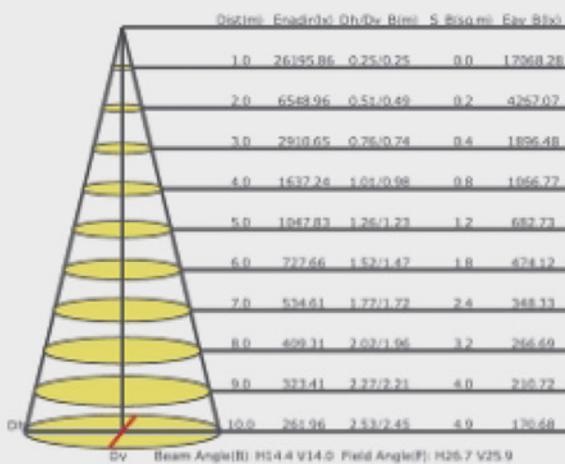

## Dimension

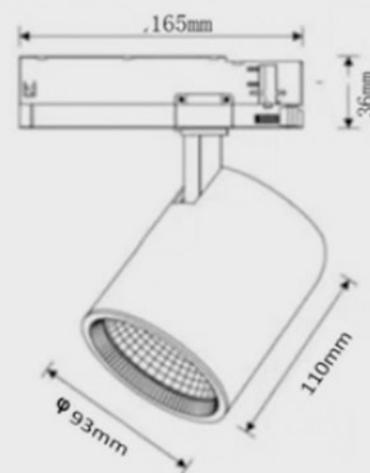

Model	Power	CCT	Luminous Efficiency	Beam Angle	RF No	Size
CLX-17 PO093110TRO430W	30W	3000K-6500K	100lm/w	15° 24° 36°	5154	Ø93 x H110mm
CLX-17 PO0103120TRO440W	40W	3000K-6500K	100lm/w	15° 24° 36°	5155	Ø103 x H120mm

# 3M 3Circuit Track

## 3-Circuit Track System



### Colours



### Options

Dimmable Dimmable




- Product code Black (RAL 9011)  
Ean Code Black
- Product code White (RAL 9010)  
Ean Code White
- Product code Grey (RAL 7040)  
Ean Code Grey
- Main Materials
- Net weight per piece
- Inner Box/Outer Box
- Rated Voltage per Circuit


### Mechanical Load Diagram




### Dimensions

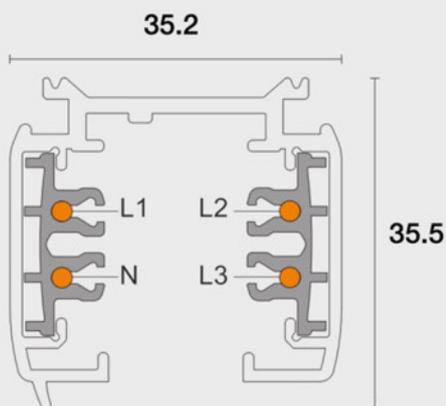

### Connecting Diagram

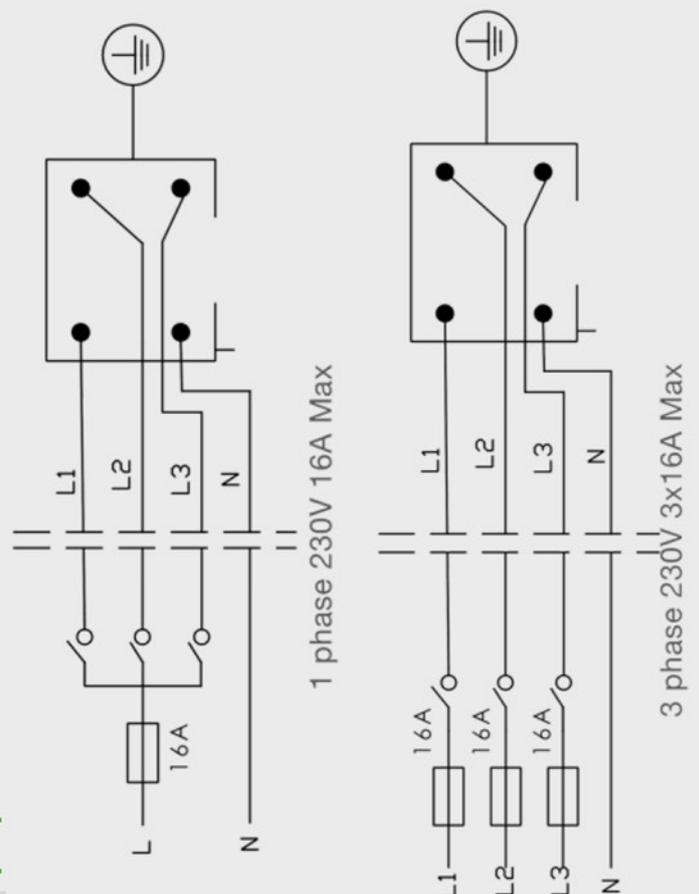

Model	Colour	Size
CLX-0430-B 8719747930144	Black	1000 mm
CLX-0430-W 8719747930137	White	2000 mm
CLX-0430-S 8719747930137	Silver	3000 mm

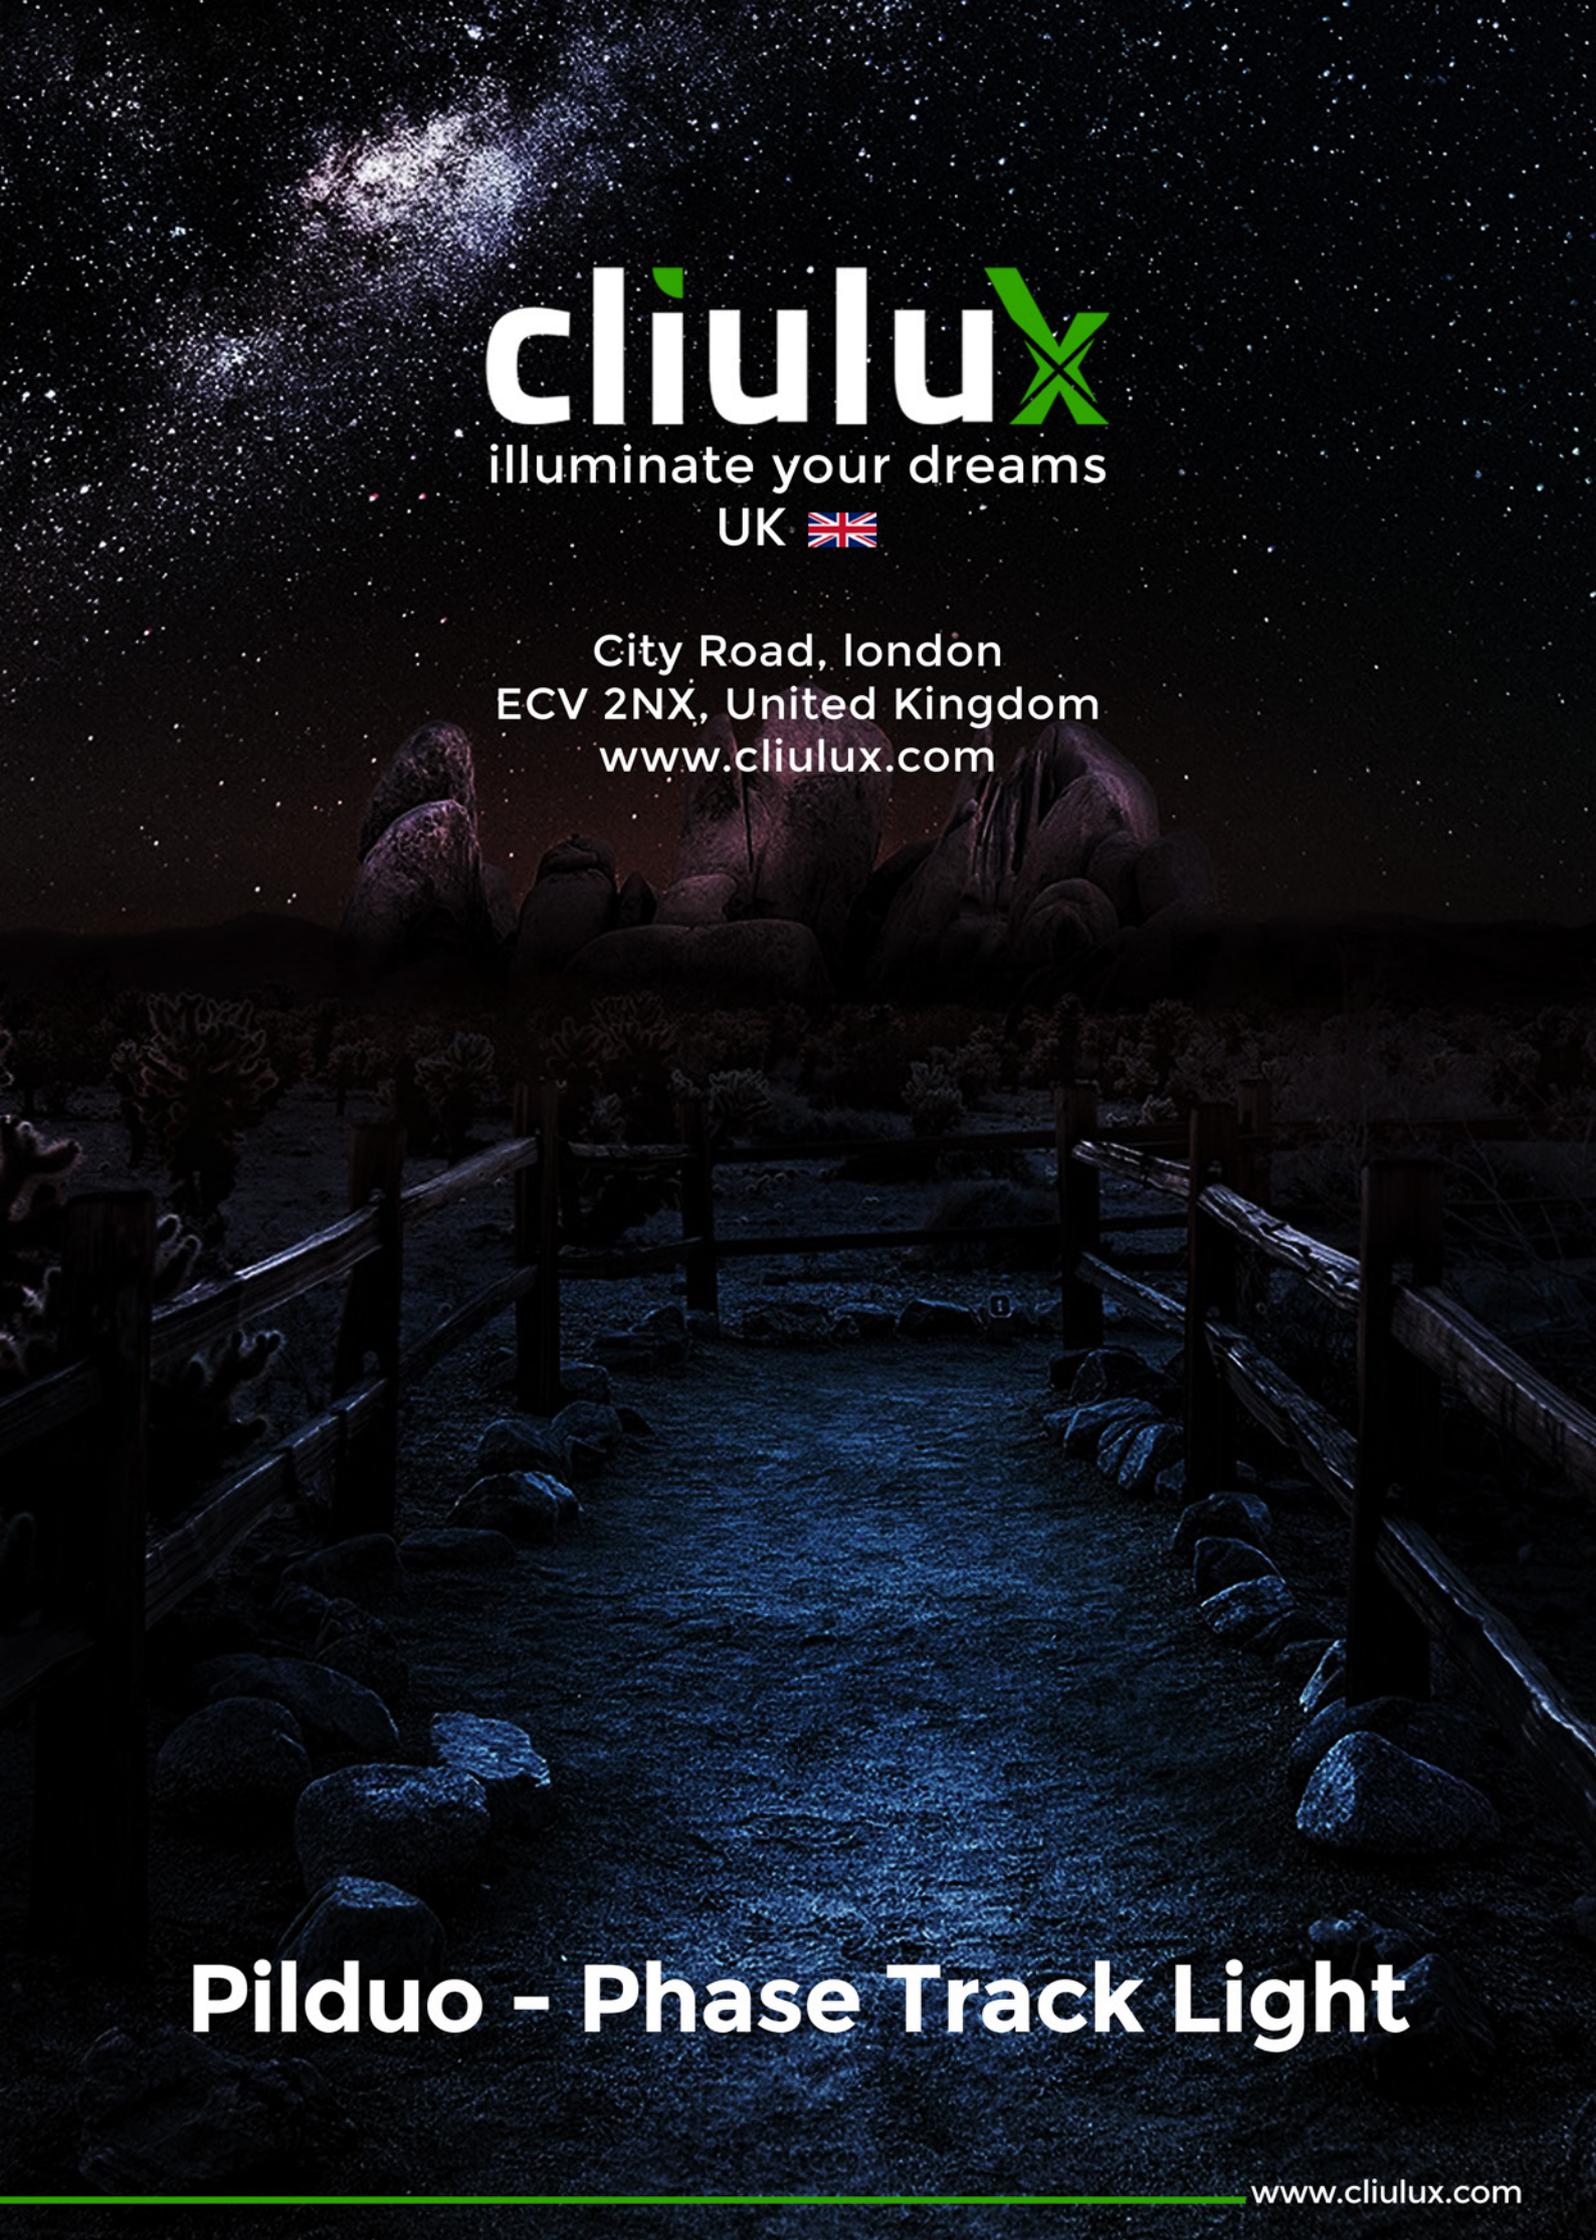

**cliulux**

illuminate your dreams

UK 

City Road, London  
ECV 2NX, United Kingdom  
[www.cliulux.com](http://www.cliulux.com)

**Pilduo - Phase Track Light**

[www.cliulux.com](http://www.cliulux.com)