

Vega SMD Down light



Vega

SMD Down Light




Product features

- Perfect structure designed die- cast aluminium with opal diffuser
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and LED Chip, Philips, Epistar.
- Lumen efficacy 95 to 100lm/w, CRI >80
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming


Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	Driver
	Lifud. Donire


Luminous Intensity Distribution Curve

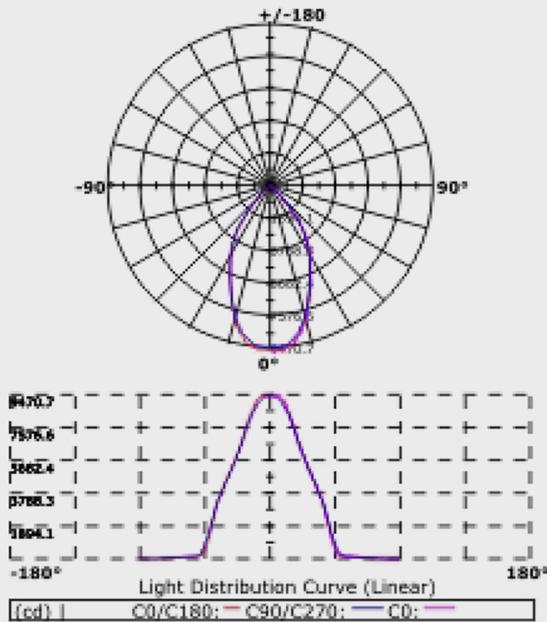

Illuminance at a Distance

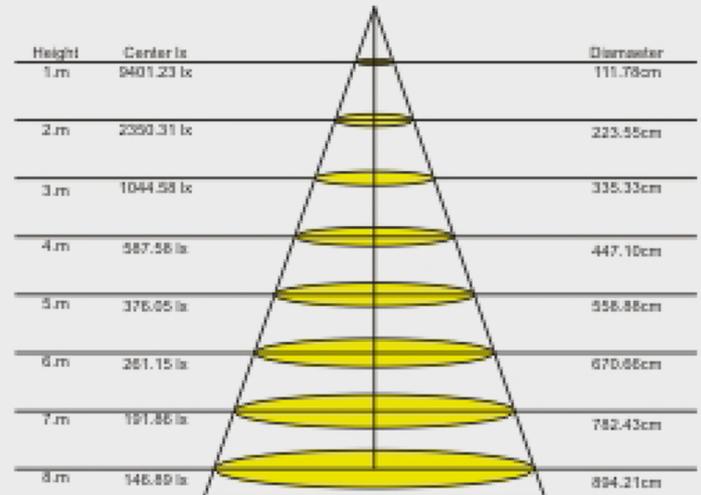

Dimension

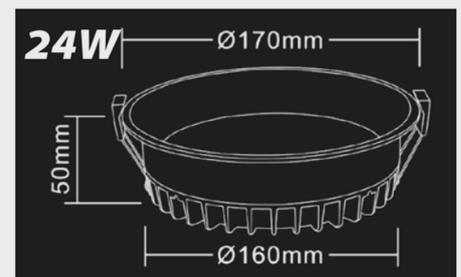

	MODEL	Power	CCT	Luminous Efficiency	Beam Angle	Size	Cut-out
ROUND	CLX - A1VG120R12W	12W	3000K-6500K	80lm/w	90°	Ø120 x H50mm	Ø110mm
	CLX - A1VG150R18W	18W	3000K-6500K	80lm/w	90°	Ø150 x H50mm	Ø140 mm
	CLX - A1VG170R24W	24W	3000K-6500K	80lm/w	90°	Ø170 x H50mm	Ø160 mm
SQUARE	CLX- A1VG110S12W	12W	3000K-6500K	80lm/w	90°	L110 x W110 x H50mm	100 mm
	CLX- A1VG145S18W	18W	3000K-6500K	80lm/w	90°	L145 x W145 x H50mm	135 mm
	CLX- A1VG165S24W	24W	3000K-6500K	80lm/w	90°	L165 x W165 x H50mm	155 mm