

Xio

Track Light Single Line



Xio

Track Light Single Line




Product features

- High quality ADC12 die cast aluminum lamp body, efficient heat dissipation structure design, effectively ensure life.
- Surface spray sand treatment, strong texture, anti-corrosion, anti-oxidation.
- High quality COB chip, high light efficiency, clear sight without glint.
- High P certification isolation without stroboscopic drive, stable quality, safe and efficient, more energy saving.
- Deep light source, large shading Angle, effectively avoid glare, comfortable light does not hurt eyes.
- Low power, ultra-high light efficiency, outstanding energy saving effect.


Classification

Class II	CCT
220 to 240VAC	3000K,4000K,6500K
50Hz / PF:>0.9	


Luminous Intensity Distribution Curve

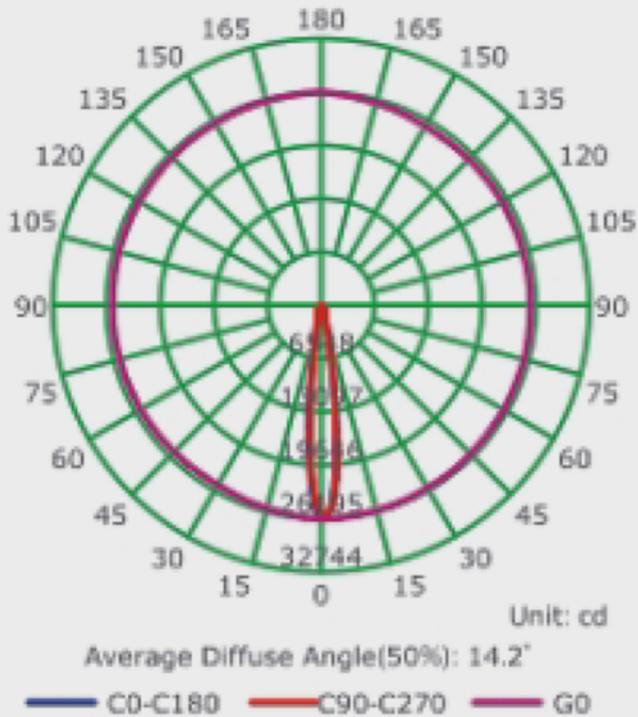

Illuminance at a Distance

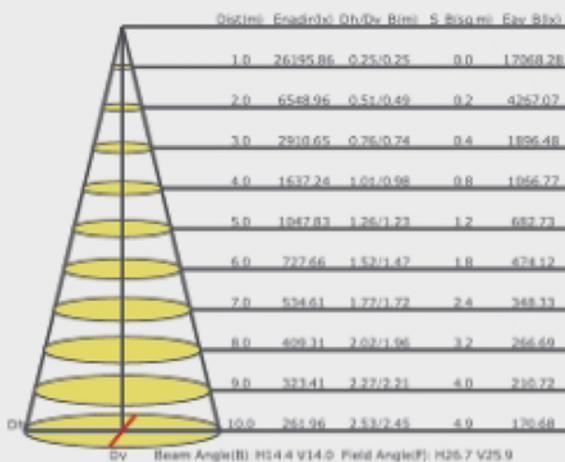

Dimension

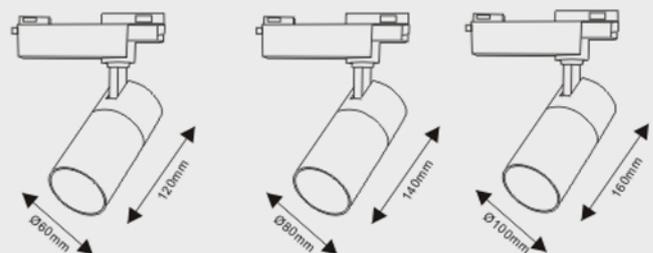

Model	Power	CCT	Luminous Efficiency	Beam Angle	RF No	Size
CLX-05XT 6012015W	15W	3000K-6500K	100lm/w	12° 24° 36°	5156	Ø60 x H120mm
CLX-05XT 8014025W	25W	3000K-6500K	100lm/w	12° 24° 36°	5157	Ø80 x H140mm
CLX-05XT 10015035W	35W	3000K-6500K	100lm/w	12° 24° 36°	5158	Ø100 x H160mm

3M 3Circuit Track

3-Circuit Track System



Colours



Options

Dimmable Dimmable




- Product code Black (RAL 9011)
Ean Code Black
- Product code White (RAL 9010)
Ean Code White
- Product code Grey (RAL 7040)
Ean Code Grey
- Main Materials
- Net weight per piece
- Inner Box/Outer Box
- Rated Voltage per Circuit


Mechanical Load Diagram




Dimensions

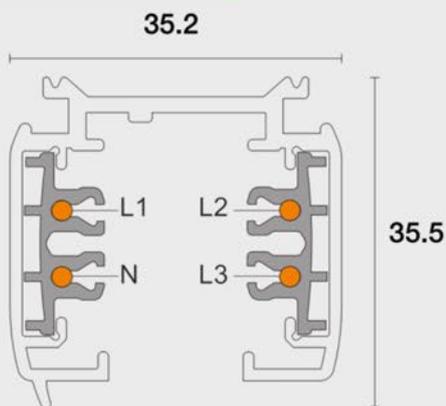

Connecting Diagram

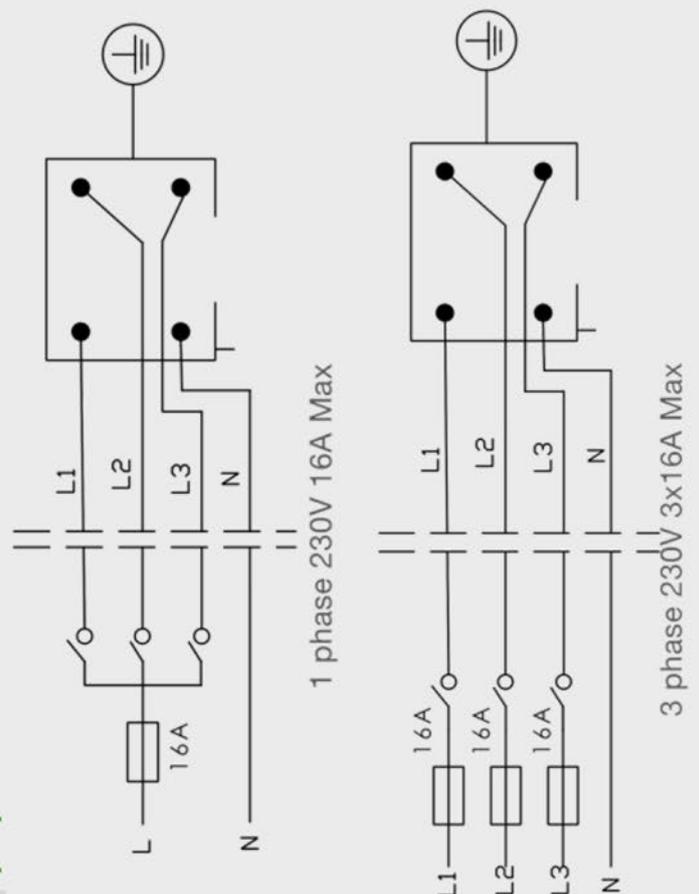

Model	Colour	Size
CLX-0430-B 8719747930144	Black	1000 mm
CLX-0430-W 8719747930137	White	2000 mm
CLX-0430-S 8719747930137	Silver	3000 mm

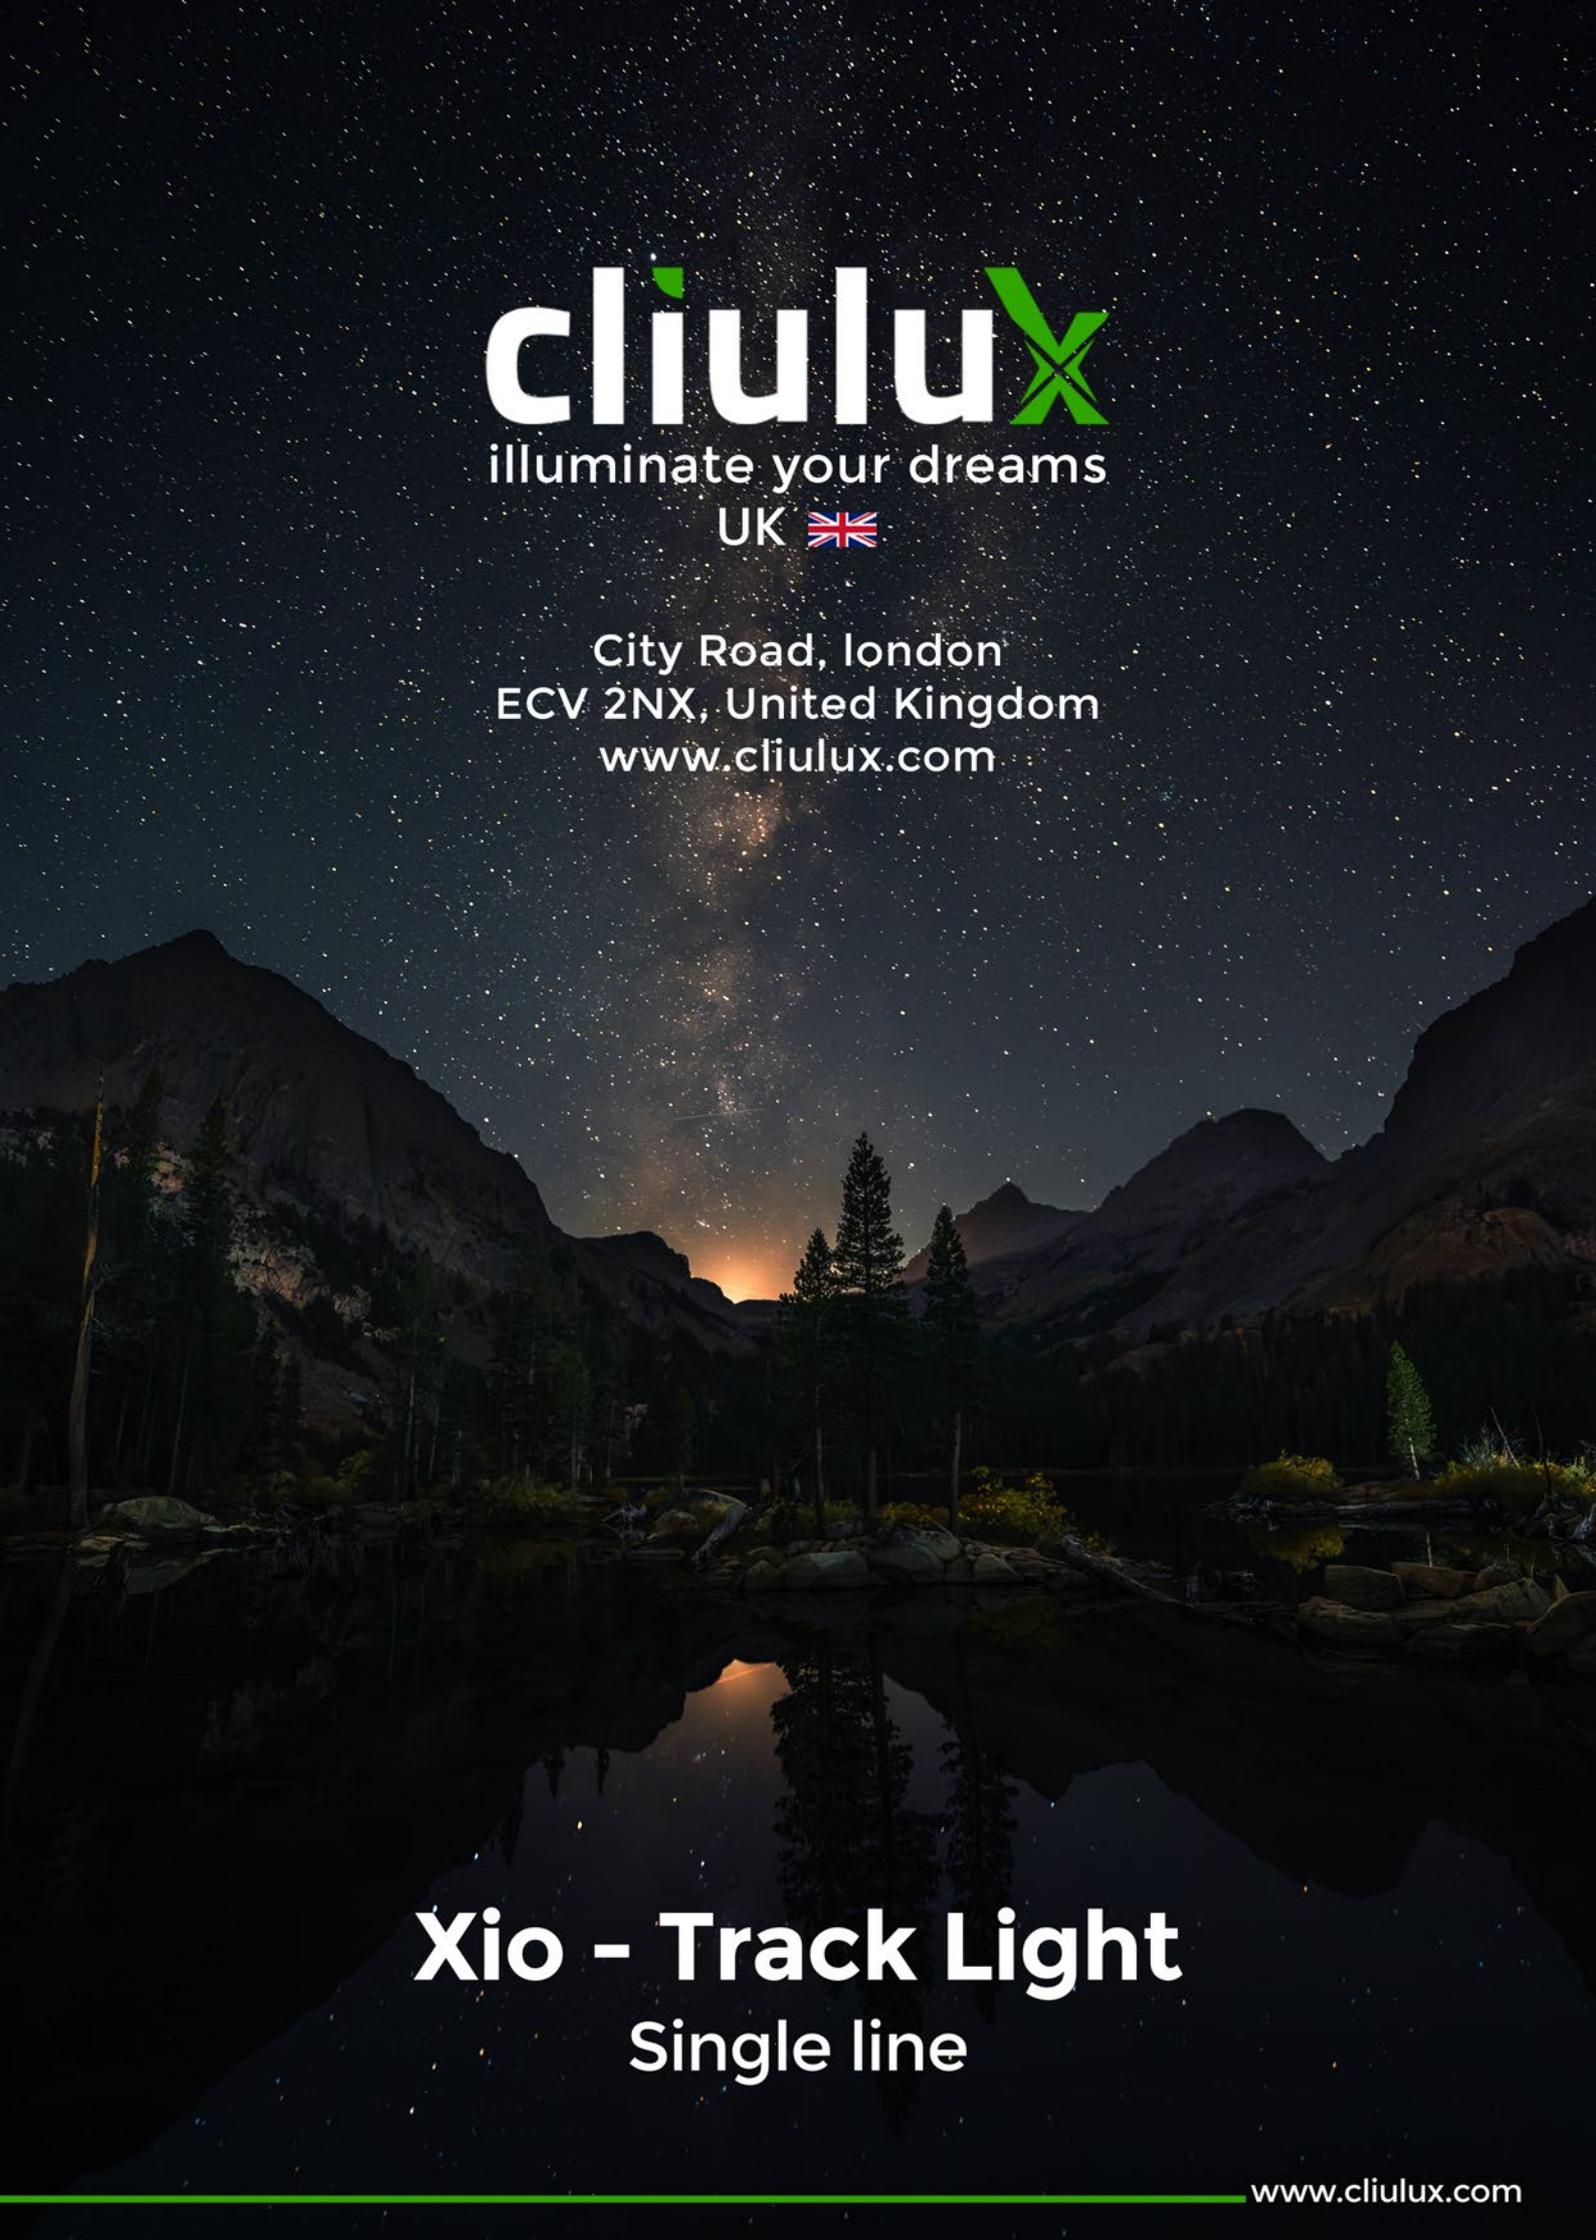

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Xio - Track Light

Single line