



Zoom
COB LED Striplight

Zoom

COB LED Striplight



Product specification

- **LED Strip Light fixture.**
- LED luminaire consists of flexible printed circuit board.
- Light dissipation is uniform along the length.
- The product is easy to install and made of environment friendly recyclable metal.
- **Mounting style** is surface mounted on taped on to the surface to fix the light.
- 2 cable entries for through-wiring of mains supply cable \varnothing 2-4mm.
- Connection terminal 2.5 | Earth conductor connection LED power supply unit 220-240 V x 0/50-60 Hz
- DC 24 V Safety class I | Protection class **IP 20** | **IP65**
- Protection against mechanical impacts < 0.1 joule EN61010 | VDE - Safety mark CE- Conformity mark
- **Lamp**
- Module connected wattage 9w, 12w, 13w 15w
- COB design 2835 | Epistar
- Luminaires connected wattage depending on driver
- Rated temperature $t_a=25\text{ }^{\circ}\text{C}$
- Ambient temperature $t_a \text{ max}=50\text{ }^{\circ}\text{C}$
- When installed in heat-insulating material $t_a \text{ max}=55\text{ }^{\circ}\text{C}$

CLX-02ZC2640809W

Wattage	9W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	900 lm/m
Luminaire luminous efficiency	100lm/W
Dimension	8x10,000mm
Cut Size	10mm
LED	264D




CLX-02ZC4800512W

Wattage	12W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	1200 lm/m
Luminaire luminous efficiency	100lm/W
Dimension	5x5000mm
Cut Size	50mm
LED	480D




CLX-02ZC3200812W

Wattage	12W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	1200 lm/m
Luminaire luminous efficiency	100lm/W
Dimension	8x5000mm
Cut Size	50mm
LED	320D




CLX-02ZC3201012W

Wattage	12W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	1200 lm/m
Luminaire luminous efficiency	100lm/W
Dimension	10x5000mm
Cut Size	50mm
LED	480D




CLX-02ZC6801015W


Wattage	15W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	1500 lm/m
Luminaire luminous efficiency	100lm/W
Dimension	10x5000mm
Cut Size	25mm
LED	680D

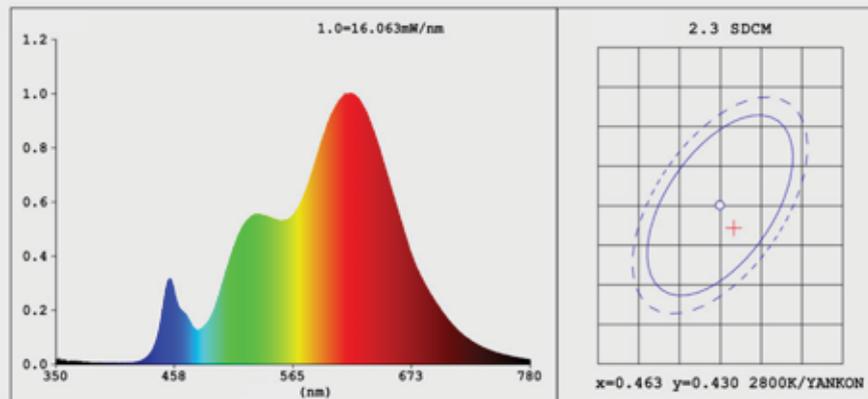

CLX-02ZC7681013RGB

Wattage	13W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	R12G500B80
Luminaire luminous efficiency	100lm/W
Dimension	10x5000mm
Cut Size	25mm
LED	768D

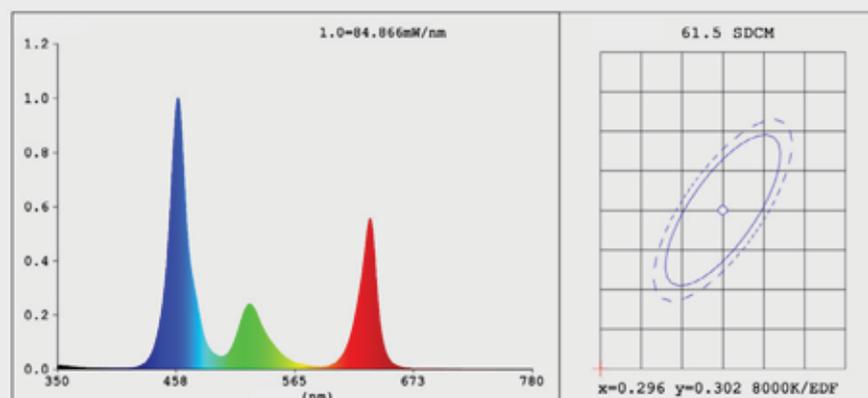

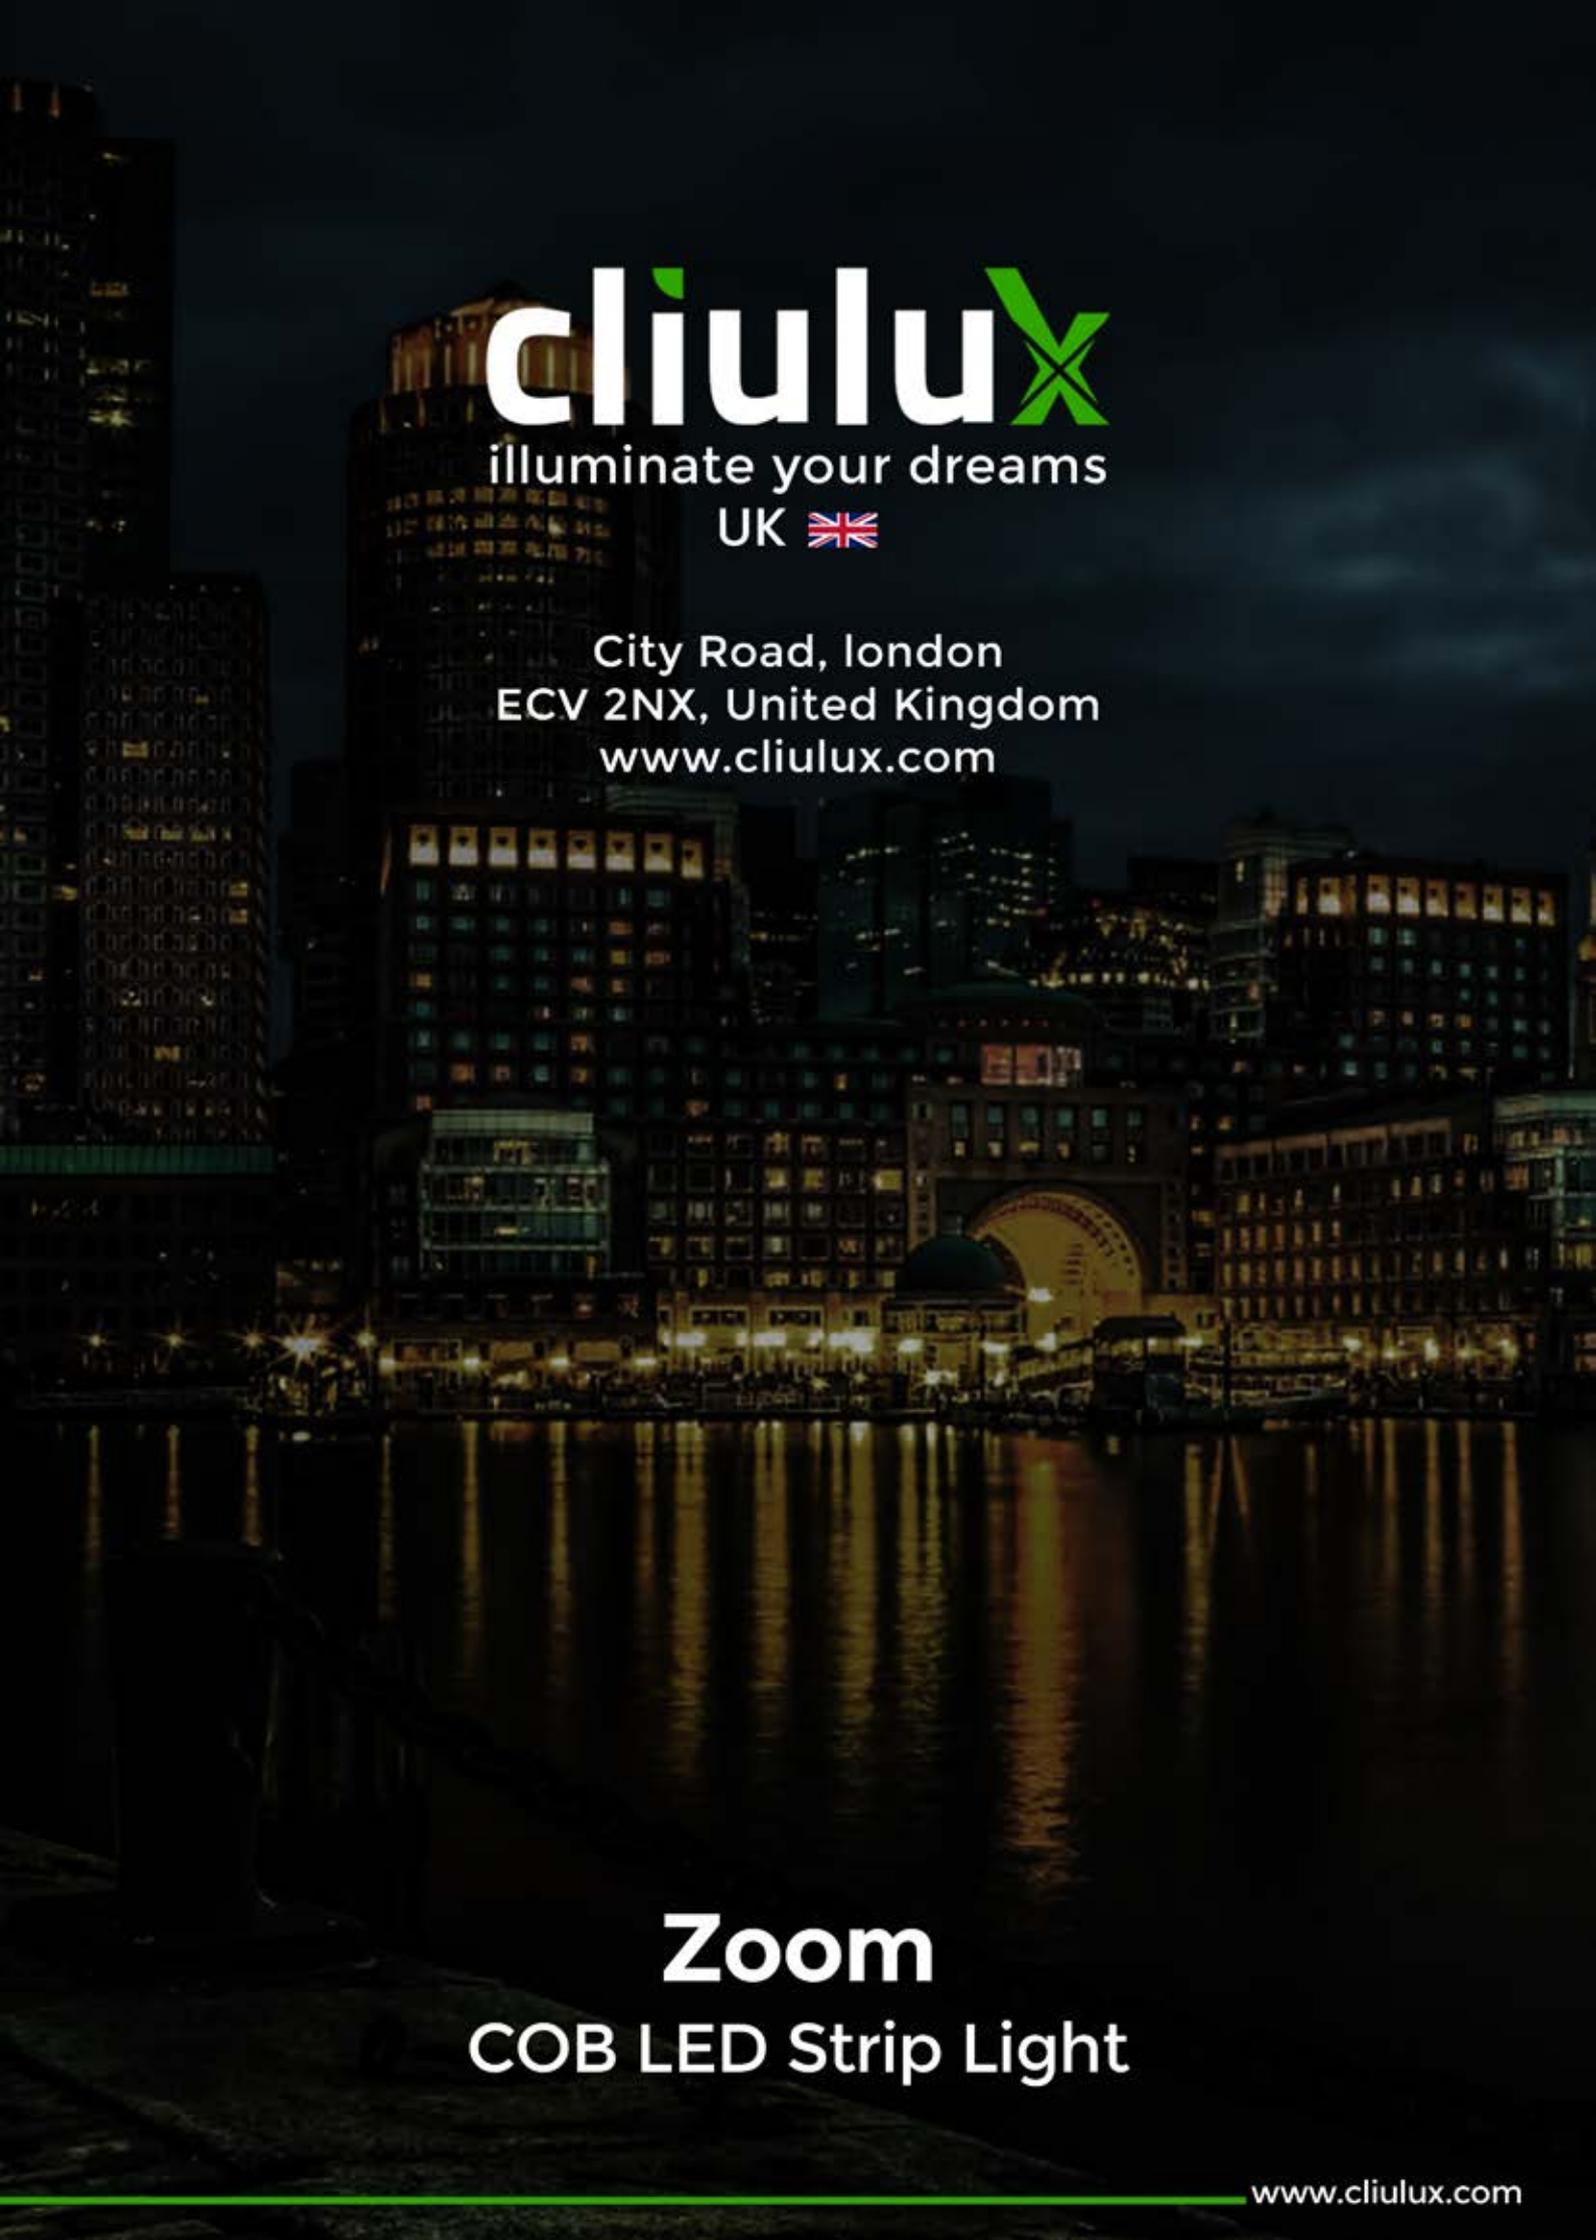

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Zoom
COB LED Strip Light