

Zoom LED Striplight



Zoom

2835 LED Striplight



Product specification

- LED Strip Light fixture.
- LED luminaire consists of flexible printed circuit board.
- Light dissipation is uniform along the length.
- The product is easy to install and made of environment friendly recyclable metal.
- **Mounting style** is surface mounted on taped on to the surface to fix the light.
- 2 cable entries for through-wiring of mains supply cable \varnothing 2-4mm.
- Connection terminal 2.5 | Earth conductor connection LED power supply unit 220-240 V x 0/50-60 Hz
- DC 12-24 V Safety class I | Protection class **IP 20** | **IP65** | **IP67** | **IP68**
- Protection against mechanical impacts < 0.1 joule EN61010 | VDE - Safety mark CE- Conformity mark
- Weight: 0.20 to 0.4 kg
- **Lamp**
- Module connected wattage 4.8W/m | 9.6W/m | 14.4W/m | 19.8W/m | 21W/m
- SMD design 2835 Samsung | Epistar
- Luminaires connected wattage depending on driver
- Rated temperature $t_a=25\text{ }^\circ\text{C}$
- Ambient temperature $t_a\text{ max}=50\text{ }^\circ\text{C}$
- When installed in heat-insulating material $t_a\text{ max}=55\text{ }^\circ\text{C}$

CLX-ZS28350604.5W

Wattage	4.8W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	600 lm/m
Luminaire luminous flux	542 lm/m
Luminaire luminous efficiency	113 lm/W
Dimension	10x5000mm

CLX-ZS28351209.6W

Wattage	9.6W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	1344 lm/m
Luminaire luminous flux	1279 lm/m
Luminaire luminous efficiency	133 lm/W
Dimension	10x5000mm

CLX-ZS283514014W


Wattage	14.4W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	2016 lm/m
Luminaire luminous flux	1900 lm/m
Luminaire luminous efficiency	132 lm/W
Dimension	10x5000mm

CLX-ZS283519620w

Wattage	19.8W/m 21W/m
Colour temperature	2700K 3000K 4000K 6000K
Colour rendering index	CRI >80, >90
Module luminous flux	2772 lm/m 2940lm/m
Luminaire luminous flux	2593lm/m 2750lm/m
Luminaire luminous efficiency	131 lm/W
Dimension	15x5000mm

CLX-ZM605050RGBW17


Wattage	17W/m
Colour temperature	■ ■ ■ RGB + WW 3000K (80Ra) ■ ■ ■ RGB + NW 4000K (80Ra) ■ ■ ■ RGB + PW 6500K (80Ra) RGB + White 4 in 1 chip
Colour rendering index	CRI >80, >90
Dimension	15x5000mm




4 chips in 1 LED



Light distribution

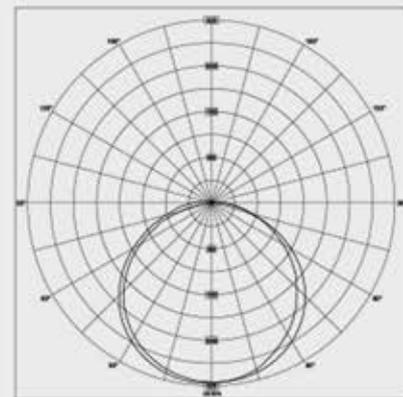

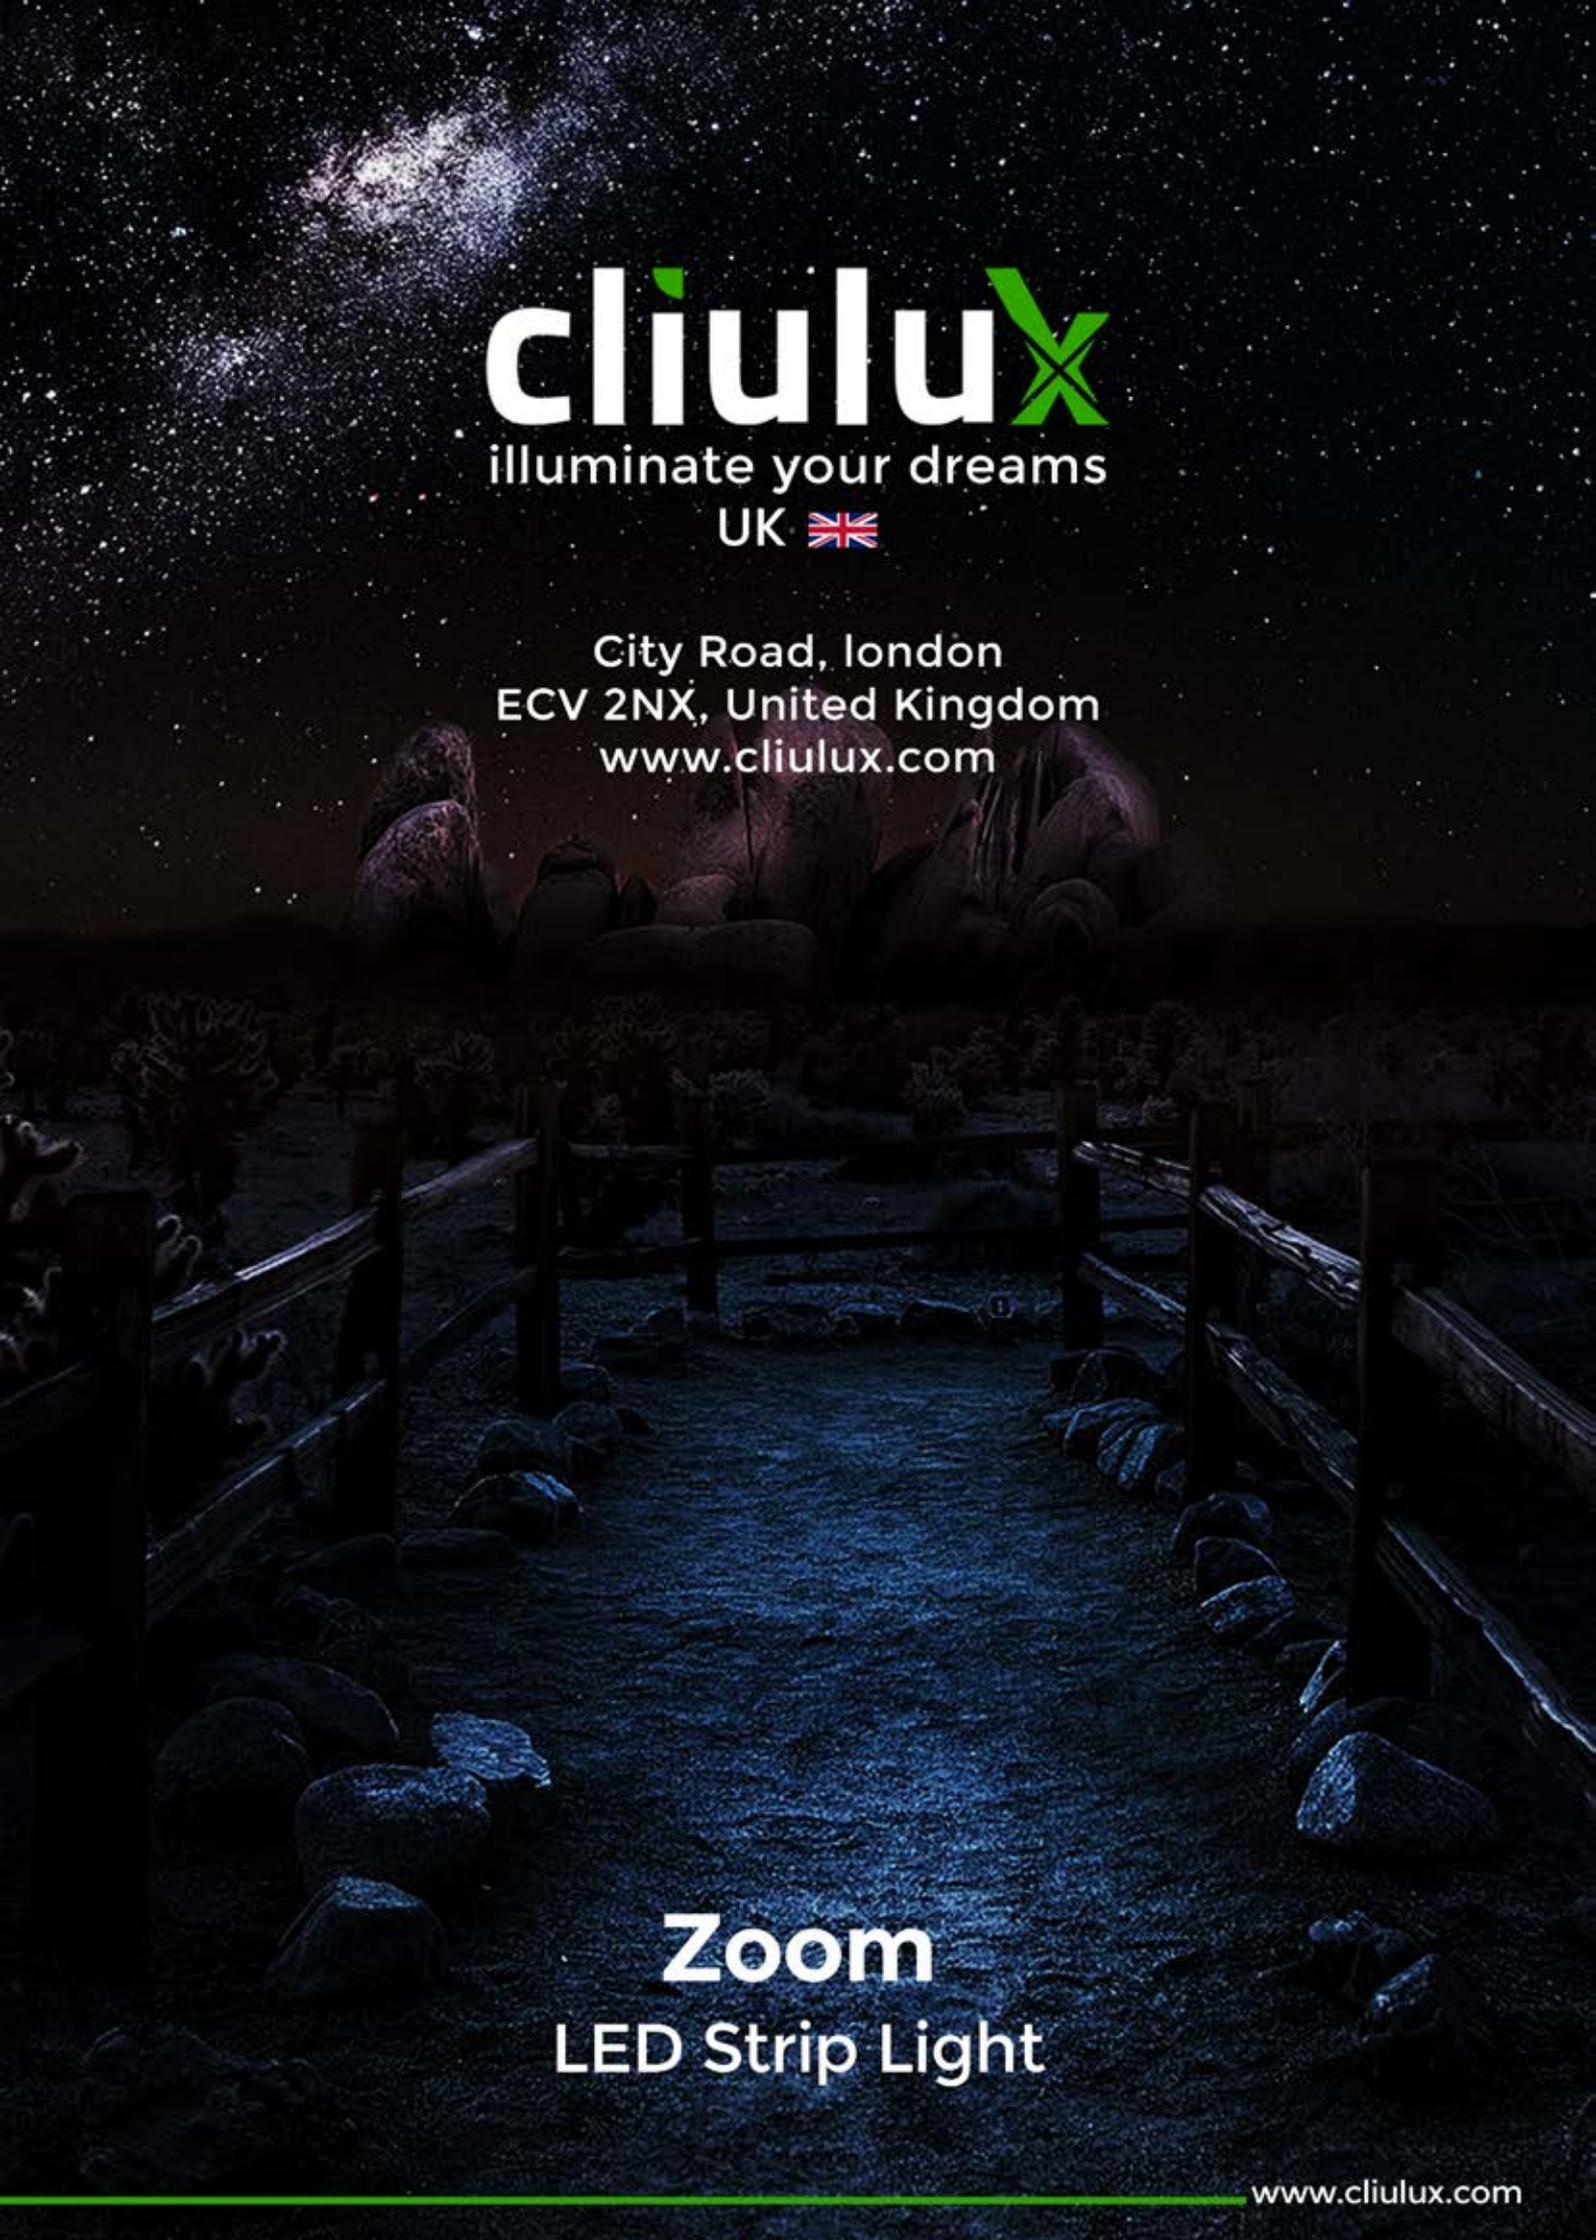

cliulux

illuminate your dreams

UK 

City Road, London
ECV 2NX, United Kingdom
www.cliulux.com

Zoom
LED Strip Light

www.cliulux.com