

916 LED Down Light

IP44



130
LIM/W



50000
HOURS

CRI
>95

5
YEAR
WARRANTY



2700K+6500K

916

LED Down Light



Product features

- Perfect structure designed die-cast aluminium with PC lens
- High Performance Diffuser and reflector with different beam angles
- Easy to install and low cost of maintenance
- Lumen maintenance >L70 at end of life and Philips, Cree , Citizen.etc.
- Lumen efficacy 95 to 130lm/w, CRI >95
- Low energy consumption and up to >70% energy saving
- Optional Analog, 0/1-10V, DALI, Dimming

Classification


Class II

220 to 240VAC 50/60Hz


Led Driver: Bridgelux and Cree led

CCT


2700k +6500k

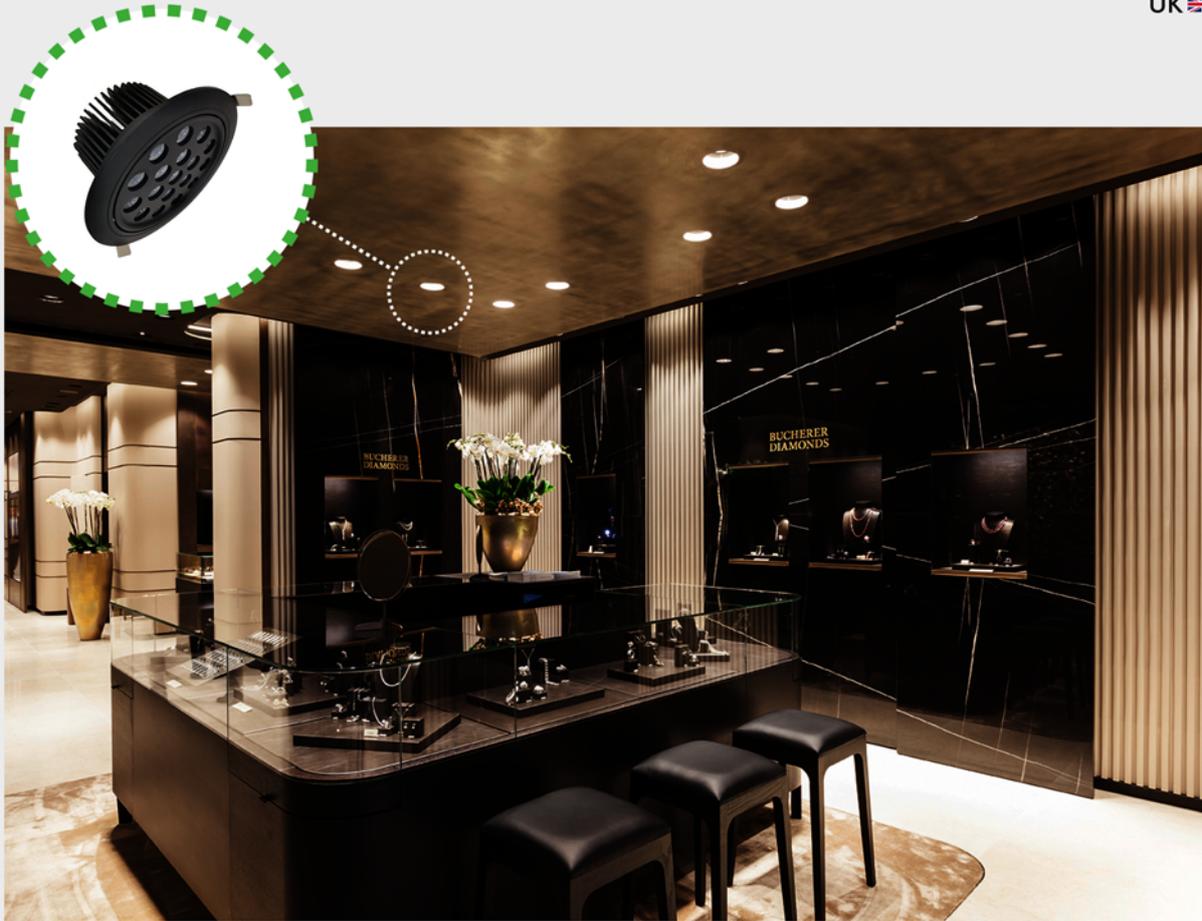

LI Distribution Curve

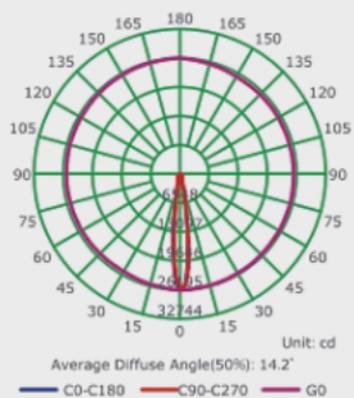

Illuminance at a Distance

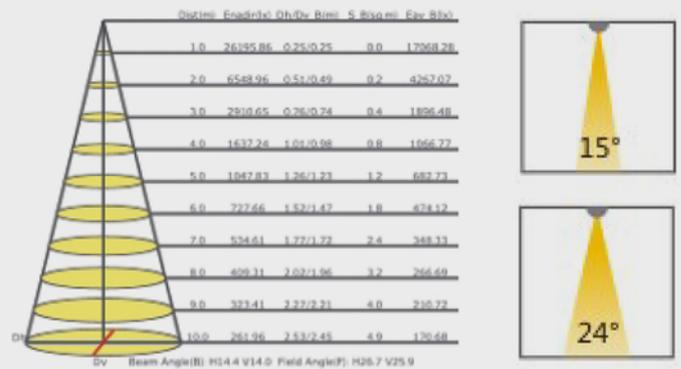

Model	Power	CCT	Luminous Efficiency	Beam Angle	RF No	Size	Cut out
CLX-05 916 16018	18W	2700K-6500K	130lm/w	15° 24°		Ø160 x H100mm	Ø145mm
CLX-05 916 16036	36W	2700K-6500K	130lm/w	15° 24°		Ø160 x H100mm	Ø145mm

High CRI LED >95
Narrow Beam Projection



The logo for cliulux, featuring the word 'cliulux' in a white, lowercase, sans-serif font. The letter 'x' is stylized with a green outline and a white fill. The background of the entire page is a dark grey to black gradient with a complex, geometric pattern of overlapping, irregular polygons outlined in a bright orange-gold color.

illuminate your dreams

UK 

City Road, london
ECV 2NX, United Kingdom
www.cliulux.com

916
LED Down Light